

SmartLogger1000



Smart

- Modbus-TCP for connections to Huawei NetEco
- IEC60870-5-104 for connections to third-party monitoring systems
- USB and embedded web for data reading and software upgrade
- Automatically detecting facilities and mapping RS485 addresses
- Remote control of active & reactive power

Simple

- Up to 80 inverters per SmartLogger1000
- Up to 30 devices per RS485 bus
- Easy to install on walls, tabletops and rails


Reliable

- Max. reliable communication range of 1,000m

Technical Specifications	SmartLogger1000
	Device Management
Max. Number of Manageable Devices	80
Max. Number of Manageable Smart Inverters	80
	Communication Interface
Electrical Ethernet	ETH x 1, 10 / 100 Mbps
RS485	COM x 3, 2400 / 4800 / 9600 / 19200 / 115200 bps
Digital / Analog Input / Output	DI x 4, DO x 3, AI x 2
	Communication Protocol
Ethernet	Modbus-TCP, IEC 60870-5-104
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645
	Interaction
LCD	3.5 inch Graphic LCD
LED	LED Indicator x 3
WEB	Embedded WEB
USB	USB2.0 x 1
	Environment
Operating Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
Relative Humidity	5% ~ 95%
Max. Operating Altitude (Non-condensing)	4,000 m (13,123 ft.)
	Mechanical
Power Supply	100 Vac ~ 240 Vac, 50 Hz / 60 Hz
Power Consumption	Typical 3 W, Max. 7 W
Dimensions (W x H x D)	225 x 140 x 50 mm (8.9 x 5.5 x 2.0 inch)
Weight	0.5 kg (1.1 lb.)
Protection Rating	IP20
Installation Options	Wall Mounting, Rail Mounting, Tabletop Mounting

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version No.:01-(2018)05

I Optical Fiber Ring Network + PLC

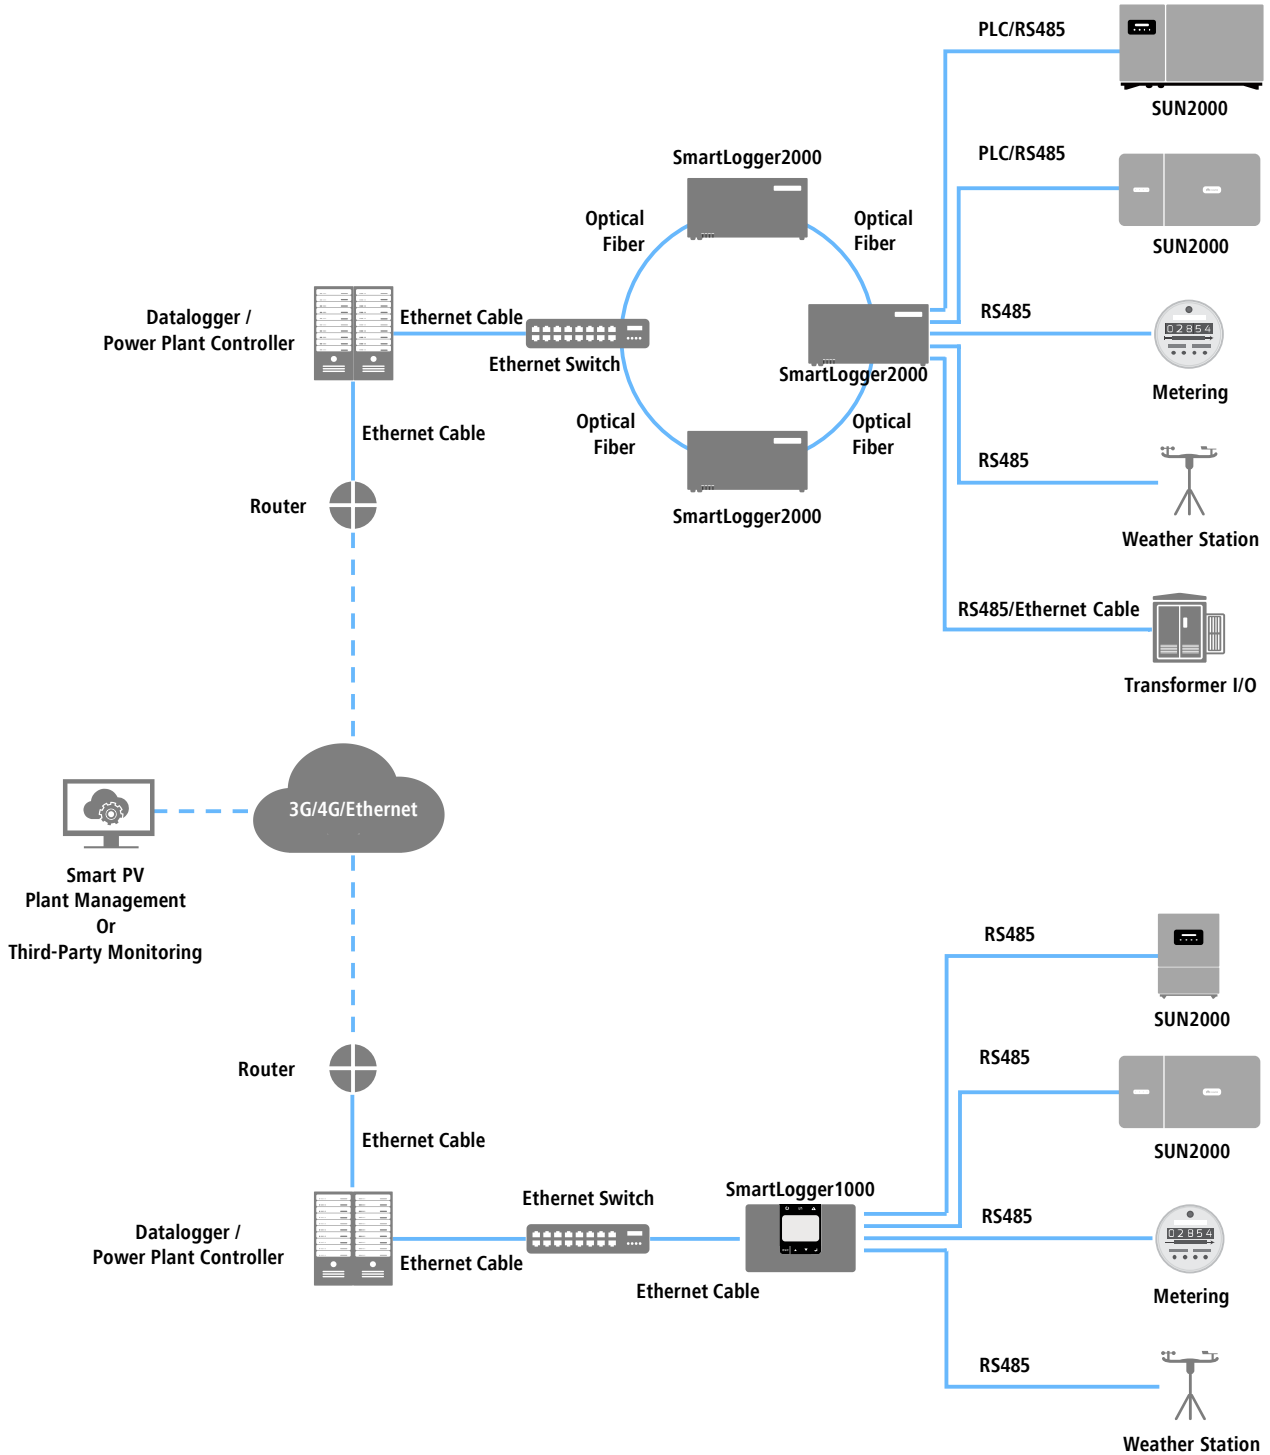

II Star Ethernet Network + RS485