

SmartACU2000B



With PID



Without PID

SmartACU2000B (Smart Array Controller)

is a powerful integration of PV array communication and other smart functions. What's more, it supports 1000V/1100V/1500V DC system perfectly.

Smart

- SmartLogger2000 built-in
- Smart Anti-PID2000 module built-in (optional)
- Multiple communication interfaces including PLC, RS485, Fast Ethernet, and SFP ports, flexible applications

Simple

- Integrated communication unit with multiple functions built-in
- Easy installation with SmartLogger2000 & anti-PID module pre-assembled inside the cabinet

Reliable

- Industrial application and high reliability

Specifications	SmartACU2000B-D-PLC	SmartACU2000B-D-2PLC	SmartACU2000B-D-PID/PLC	SmartACU2000B-D-2PID/2PLC
	Configuration			
SmartLogger	SmartLogger2000			
RS485	Yes			
Number of PLC Module	1	2	1	2
Number of Smart Anti-PID2000 Module	0	0	1	2
	Environment			
Operating Temperature	-40 °C ~ +60 °C (-40 °F ~ +140 °F)			
Relative Humidity	4% ~ 100%			
Max. Operating Altitude	4,000 m (13,123 ft.)			
	Electrical			
Input AC Voltage for Cabinet	100 V ~ 240 V, L / N (L)+ PE			
Input AC Voltage for PID	380 V ~ 800 V; 3Ph+FE (Functional Earth)			
Input AC Voltage for PLC	380 V ~ 800 V; 3Ph			
Input AC Frequency	50 Hz / 60 Hz			
	Mechanical			
Cable Entries	Bottom in & out			
Maintenance	Front			
Dimensions (W / H / D)	640 x 770 x 315 mm (25.2 x 30.3 x 12.4 inch)		880 x 770 x 369 mm (34.6 x 30.3 x 14.5 inch)	
Weight	29kg (63.9 lb.)	32 kg (70.5 lb.)	49 kg (108.0 lb.)	61 kg (134.5 lb.)
Protection Grade	IP65			
Installation Options	Wall Mounting, Rack Mounting, Pole Mounting			

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version No.:01-(2018)0604

SmartLogger2000



Smart

- Functioning as communication manager, data logger, PLC master and Ethernet switch
- Multiple communication interfaces including PLC, RS485, Fast Ethernet, and SFP ports, flexible applications
- STP and RSTP supported for fiber ring network and ring protection
- Bluetooth, embedded WEB and USB supported, user-friendly
- Fast and reliable active and reactive power compensation control
- Smart I-V Curve Diagnosis supported

Simple

- Up to 200 devices supported, including up to 150 inverters
- An integration of data collection, protocol conversion and Ethernet switch

Reliable


- Industrial application and high reliability

Technical Specifications	SmartLogger2000
	Device Management
Max. Number of Manageable Devices	200
Max. Number of Manageable Smart Inverters	150
	Communication Interface
Electrical Ethernet	ETH x 2, 10 / 100 Mbps
Optical Ethernet (optional)	SFP x 2, 100 Mbps
RS485	COM x 6, 2400 / 4800 / 9600 / 19200 / 115200 bps
PLC	PLC x 1, 115.2 kbps
Digital / Analog Input / Output	DI x 8, DO x3, AI x 7, AO x 4, PT100 / PT1000 x 2
	Communication Protocol
Ethernet	Modbus-TCP, IEC 60870-5-104
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645
	Interaction
LED	LED Indicator x 4
WEB	Embedded WEB
Bluetooth	SUN2000 App
USB	USB2.0 x 1
	Environment
Operating Temperature	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Storage Temperature	-40 °C ~ 70 °C (-40 °F ~ 158 °F)
Relative Humidity	5% ~ 95%
Max. Operating Altitude (Non-condensing)	4,000 m (13,123 ft.)
	Mechanical
Power Supply	100 Vac ~ 240 Vac , 50 Hz / 60 Hz
Power Consumption	Typical 8 W, Max. 15 W
Dimensions (W x H x D)	411 x 170 x 58.6 mm (16.2 x 6.7 x 2.3 inch), with mounting ears
Weight	2.5 kg (5.5 lb.)
Export Limitation	Supported
Protection Rating	IP20
Installation Option	Wall Mounting, Rail Mounting, Integrated Inside Huawei Smart Array Controller

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version No.:01-(20180604)

Network Applications

I Optical Fiber Ring Network + PLC

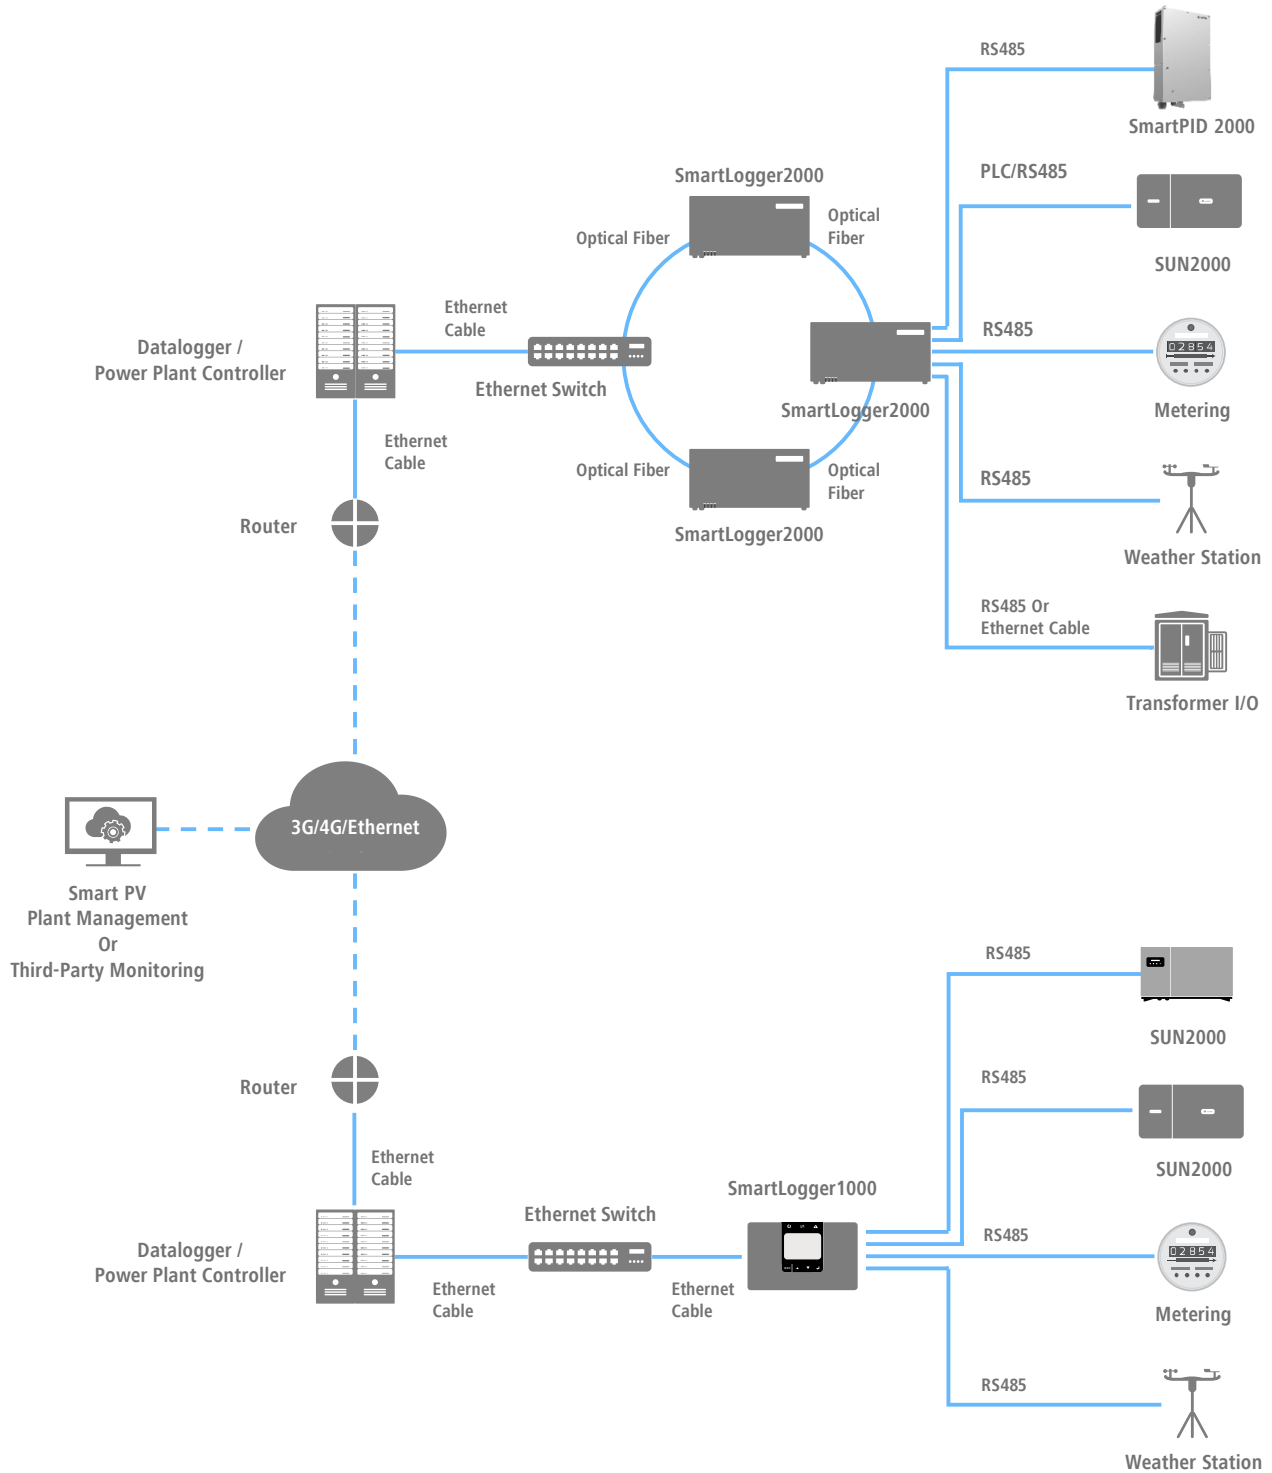

II Star Ethernet Network + RS485