

How to export the logs file from SmartLogger2000



Huawei Technologies Co. Ltd.

Version	Created by	Date	Remarks
02	Huawei e84081311	25.10.2018	Initial version created


The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

This document describe how to export the logs file from the Smartlogger2000 through WebUI and SUN2000APP. The default IP of the Smartlogger2000 is 192.168.0.10 and default password is “Changeme”.


Procedure:

1. Export the logs file through WebUI


Connect with a LAN cable the Ethernet ports of the Smartlogger and PC. Open a browser (Chrome 50 or IE11) and type the next link: <https://192.168.0.10>. Login as “Advanced User” and type in the password. The default password for all users is “Changeme”.

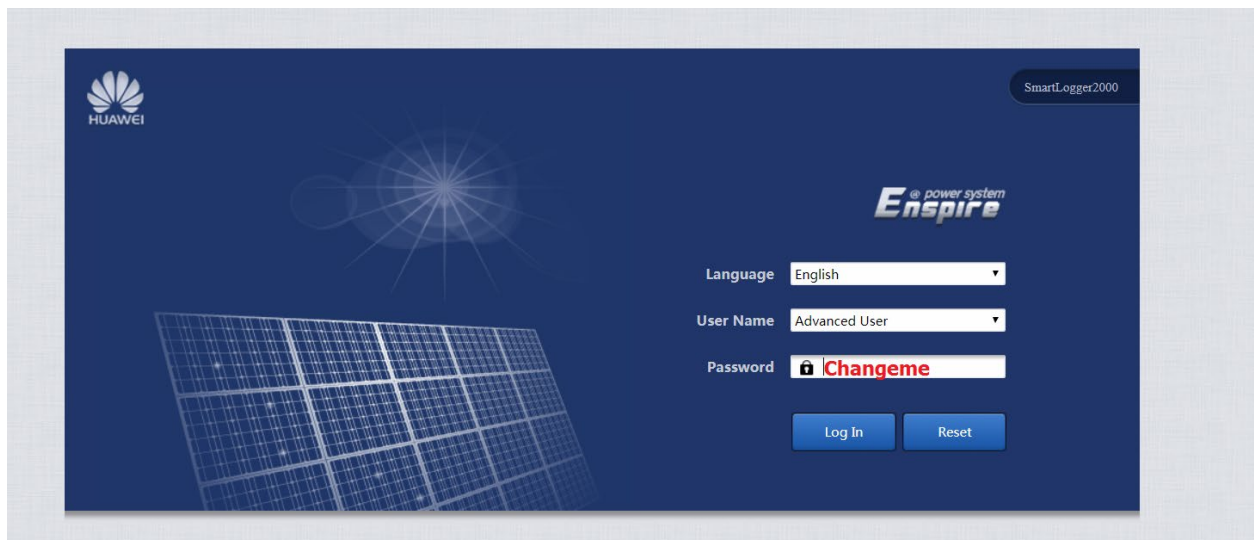

Choose Maintenance menu→Device Log→select the Logger→Export log like below:

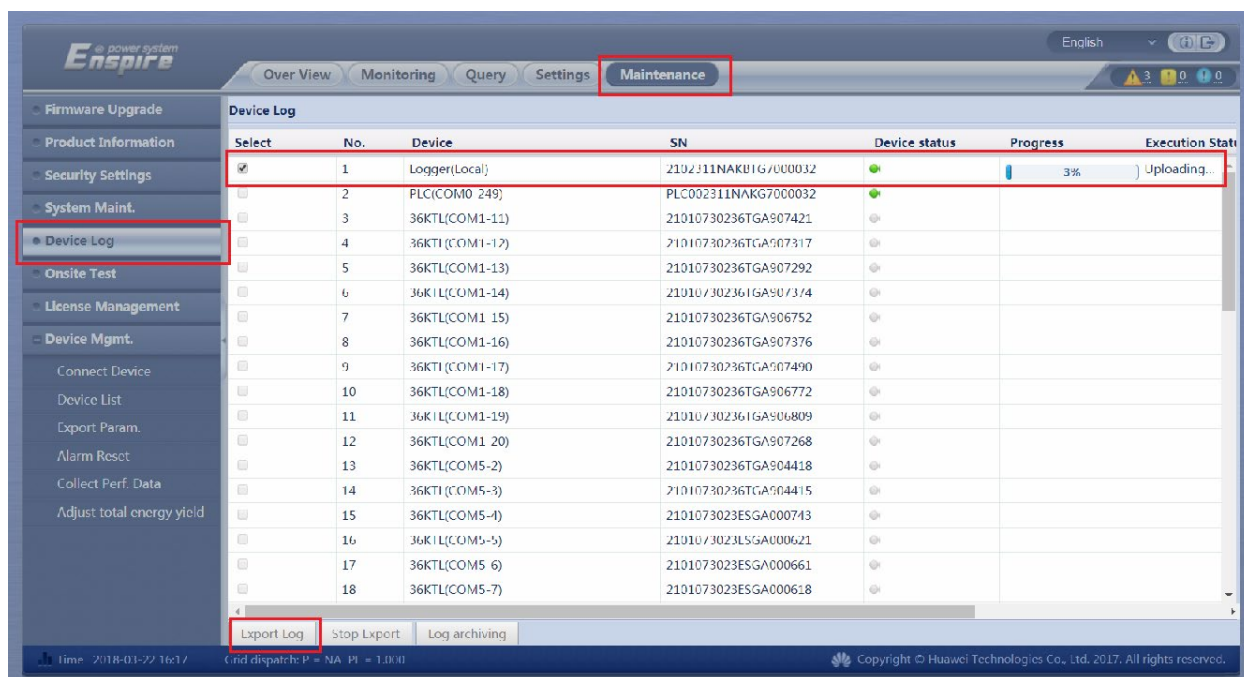


After the progress reach 100% select OK and then Log archiving and the log will be saved automatically in your computer like an archive.

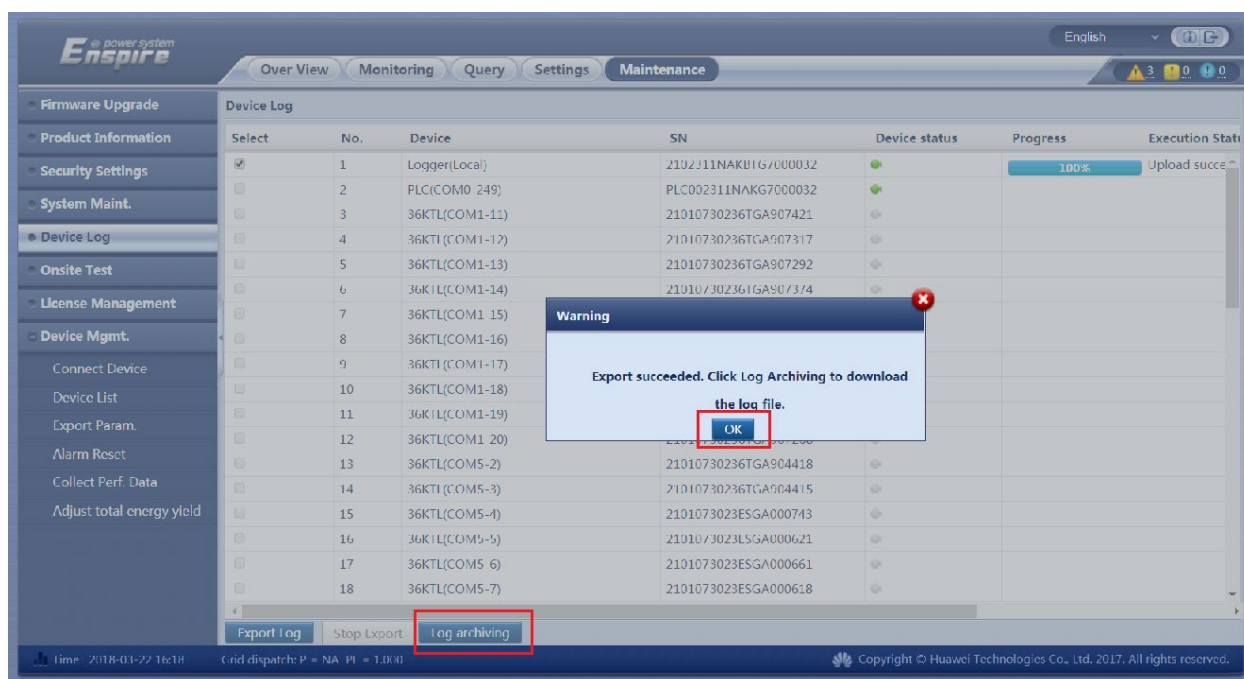


2. Export the logs file with SUN2000APP


Login on SUN2000APP as “Advanced user” and choose from main page “Monitor”:

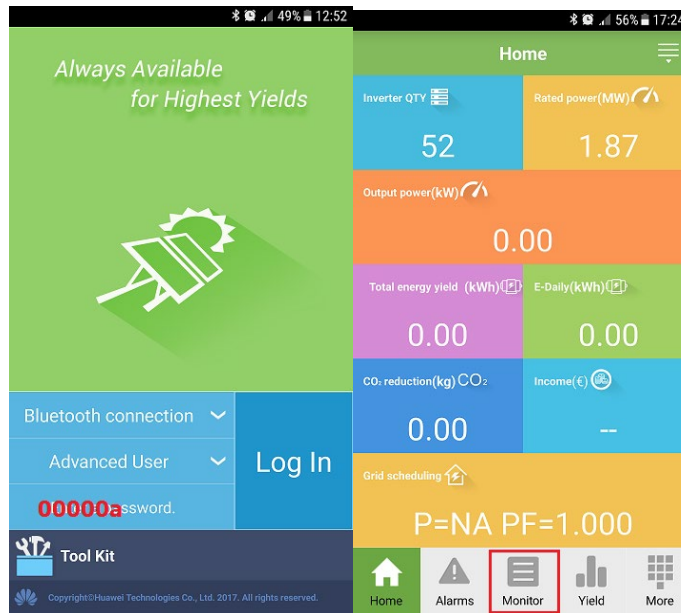

Select the Smartlogger2000 and tap Logger (Local) and choose “Device logs”:

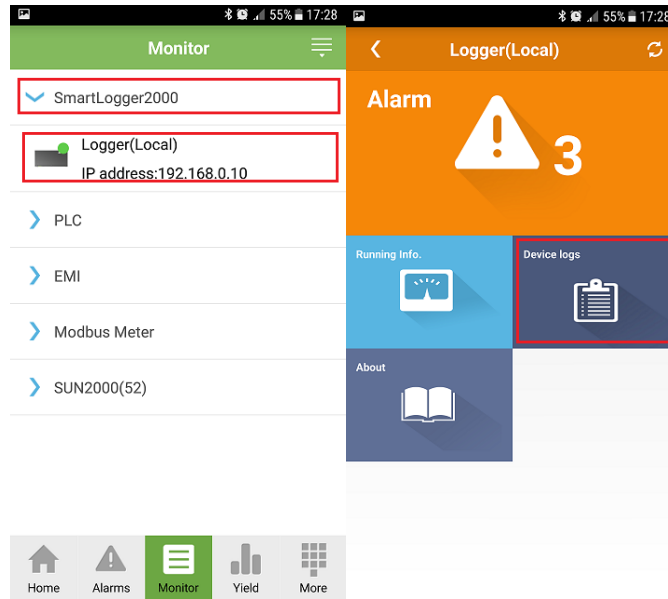

From the Log Download menu choose “Select All” and “Download File”. After the progress will finish the logs file will be saved in your phone.

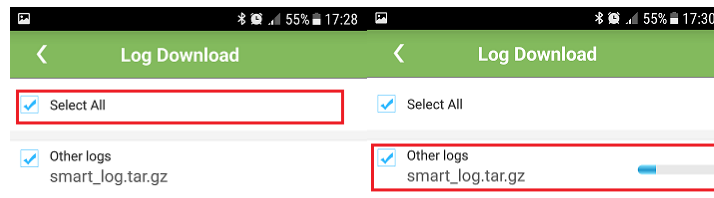

You can find the logs file in “My file”→internal storage→inverter app→sun2000app_download→smartlogger.