



FusionSolar **Utility Smart PV Solution**

SOLAR.HUAWEI.COM





About Huawei

Huawei is a leading global provider of information and communications technology (ICT) infrastructure and smart devices. With integrated solutions across four key domains – telecom networks, IT, smart devices, and cloud services – we are committed to bringing digital to every person, home and organization for a fully connected, intelligent world. Huawei's end-to-end portfolio of products, solutions and services are both competitive and secure. Through open collaboration with ecosystem partners, we create lasting value for our customers, working to empower people, enrich home life, and inspire innovation in organizations of all shapes and sizes. At Huawei, innovation focuses on customer needs. We invest heavily in basic research, concentrating on technological breakthroughs that drive the world forward.



Employees

194,000+



Interbrand's Top 100
Best Global Brands

74



160GW+

Accumulated global shipment
by the end of 2020



R&D Personnel

96,000+



Fortune Global 500

49



Countries


170+



Research institutes
/labs/centers

14

FusionSolar Smart PV Solution

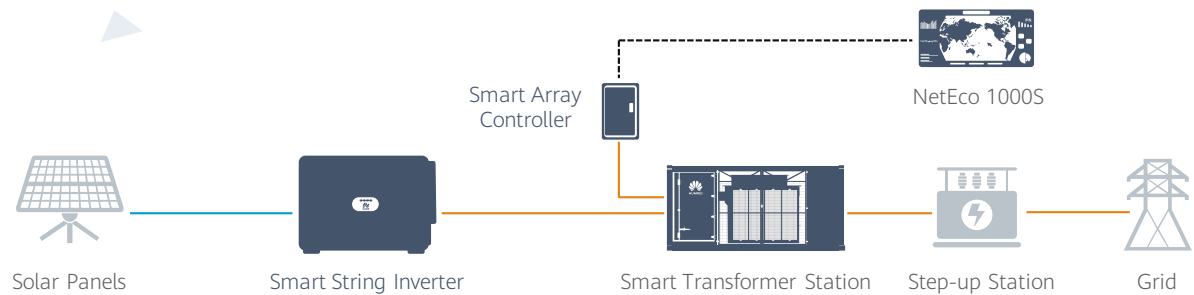

Higher Yields
>2% Higher *

Smart O&M
Lower OPEX

Safe & Reliable
25-year's Reliability



* According to TUV Technical Due Diligence Report in 220MW PV Plant

SUN2000-200KTL-H3

Smart String Inverter



100A
Per MPPT



99.0%
Max. Efficiency



String-Smart
Switch



Smart I-V Curve
Diagnosis Supported



MBUS
Supported



Fuse Free
Design




Surge Arresters for
DC & AC




IP66
Protection

Efficiency Curve

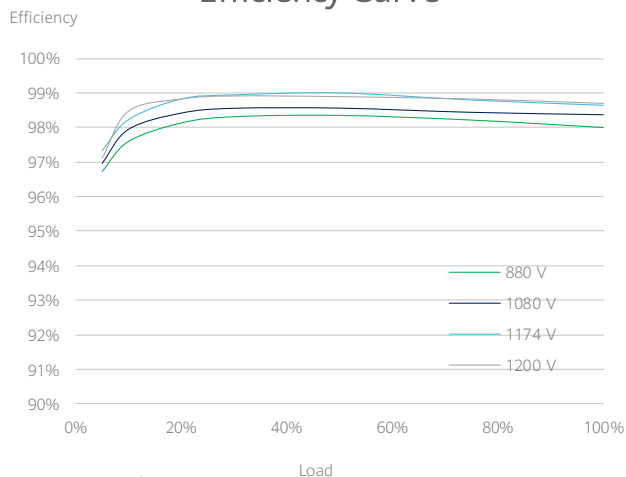

Circuit Diagram

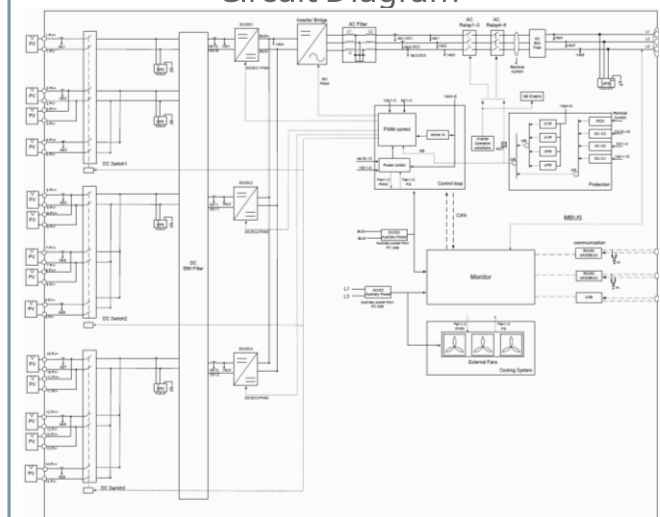

Technical Specifications

Efficiency	
Max. Efficiency	≥99.0%
European Efficiency	≥98.6%
Input	
Max. Input Voltage	1,500 V
Number of MPP Trackers	3
Max. Current per MPPT	100A/100A/100A
Max. PV Inputs per MPPT	4/5/5
Start Voltage	550 V
MPPT Operating Voltage Range	500 V ~ 1,500 V
Nominal Input Voltage	1,080 V
Output	
Nominal AC Active Power	185,000 W
Max. AC Apparent Power	215,000 VA
Max. AC Active Power (cosφ=1)	215,000 W
Nominal Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	133.6A
Max. Output Current	155.2 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 1%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, WLAN + APP
USB	Yes
MBUS	Yes
RS485	Yes
General	
Dimensions (W x H x D)	1,035 x 700 x 365 mm (40.7 x 27.6 x 14.4 inch)
Weight (with mounting plate)	≤86 kg (191.8 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4 EVO2
AC Connector	Waterproof Connector + OT/DT Terminal
Protection Degree	IP66
Topology	Transformerless

SUN2000-200KTL-H2

Smart String Inverter



9
MPP Trackers



99.0%
Max. Efficiency



String-level
Management



Smart I-V Curve
Diagnosis Supported



MBUS
Supported





Fuse Free
Design



Surge Arresters for
DC & AC



IP66
Protection

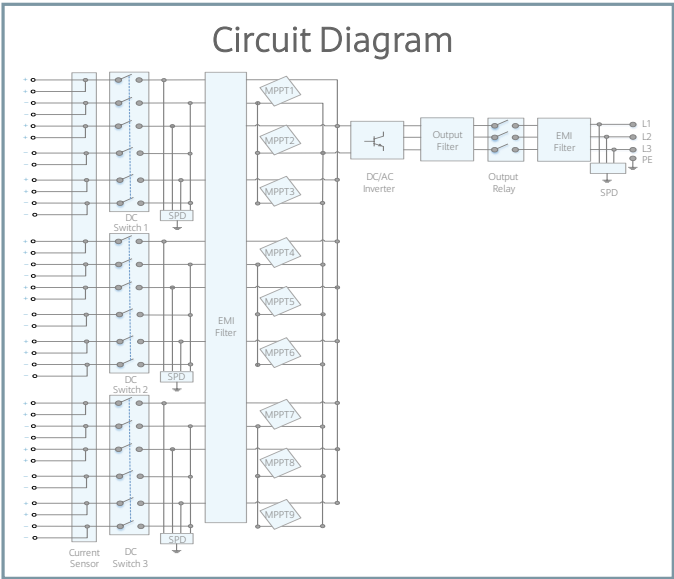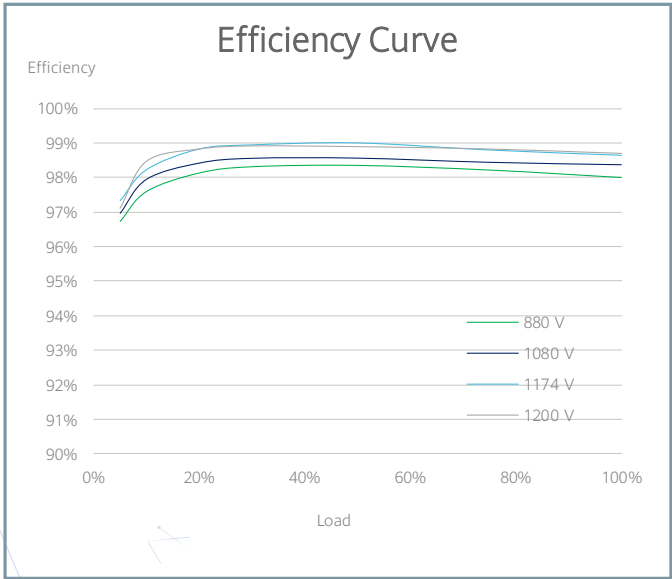

Technical Specifications

Efficiency	
Max. Efficiency	≥99.00%
European Efficiency	≥98.60%
Input	
Max. Input Voltage	1,500 V
Max. Current per MPPT	30 A
Max. Short Circuit Current per MPPT	50 A
Start Voltage	550 V
MPPT Operating Voltage Range	500 V ~ 1,500 V
Nominal Input Voltage	1,080 V
Number of Inputs	18
Number of MPP Trackers	9
Output	
AC Output Power	200,000 W*
Max. AC Apparent Power	215,000 VA
Max. AC Active Power ($\cos\phi=1$)	215,000 W
Nominal Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	144.4 A**
Max. Output Current	155.2 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 1%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, WLAN + APP
USB	Yes
MBUS	Yes
RS485	Yes
General	
Dimensions (W x H x D)	1,035 x 700 x 365 mm (40.7 x 27.6 x 14.4 inch)
Weight (with mounting plate)	≤86 kg (189.6 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4 EVO2
AC Connector	Waterproof Connector + OT/DT Terminal
Protection Degree	IP66
Topology	Transformerless

*When environmental temperature is 50°C, AC Output Power 185,000W

**When environmental temperature is 50°C, Nominal Output Current 133.6A

SUN2000-185KTL-INH0

Smart String Inverter



9
MPP Trackers



99.0%
Max. Efficiency



String-level
Management



Smart I-V Curve
Diagnosis Supported



MBUS
Supported





Fuse Free
Design



Surge Arresters for
DC & AC



IP66
Protection

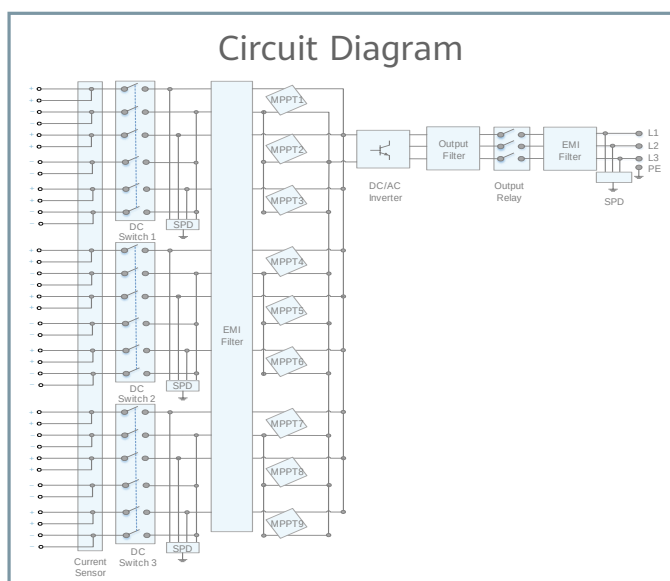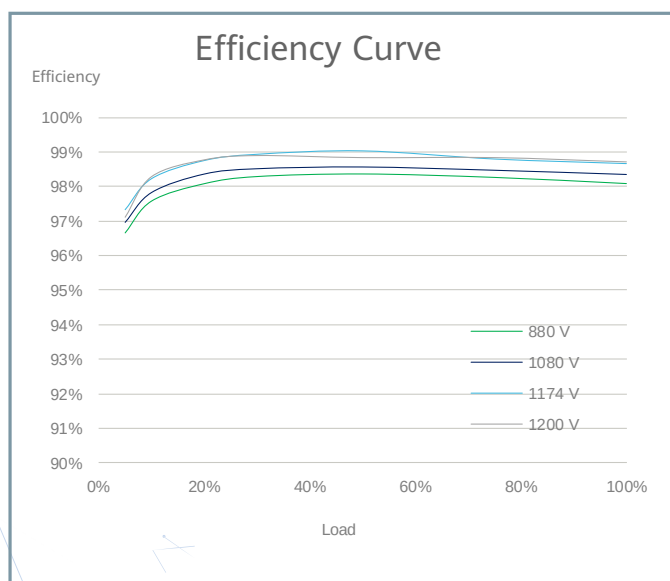

Technical Specifications

Efficiency	
Max. Efficiency	99.03%
European Efficiency	98.66%
Input	
Max. Input Voltage	1,500 V
Max. Current per MPPT	26 A
Max. Short Circuit Current per MPPT	40 A
Start Voltage	550 V
MPPT Operating Voltage Range	500 V ~ 1,500 V
Nominal Input Voltage	1,080 V
Number of Inputs	18
Number of MPP Trackers	9
Output	
Nominal AC Active Power	175,000 W @40°C, 160,000 W @50°C
Max. AC Apparent Power	185,000 VA
Max. AC Active Power ($\cos\varphi=1$)	185,000 W
Nominal Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	126.3 A @40°C, 115.5 A @50°C
Max. Output Current	134.9 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, Bluetooth/WLAN + APP
USB	Yes
MBUS	Yes
RS485	Yes
General	
Dimensions (W x H x D)	1,035 x 700 x 365 mm (40.7 x 27.6 x 14.4 inch)
Weight (with mounting plate)	84 kg (185.2 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4 EVO2
AC Connector	Waterproof Connector + OT/DT Terminal
Protection Degree	IP66
Topology	Transformerless
Standard Compliance (more available upon request)	
Certificate	EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 62910, IEC 60068, IEC 61683
Grid Code	IEC 61727

SUN2000-100KTL-M1

Smart String Inverter



10
MPP Trackers



98.8% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve
Diagnosis Supported



MBUS
Supported



Fuse Free
Design




AFCI Protection
Optional




IP66
Protection

Efficiency Curve

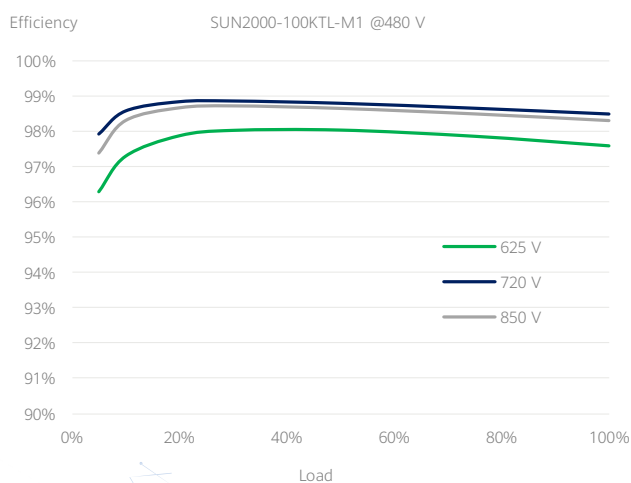

Circuit Diagram

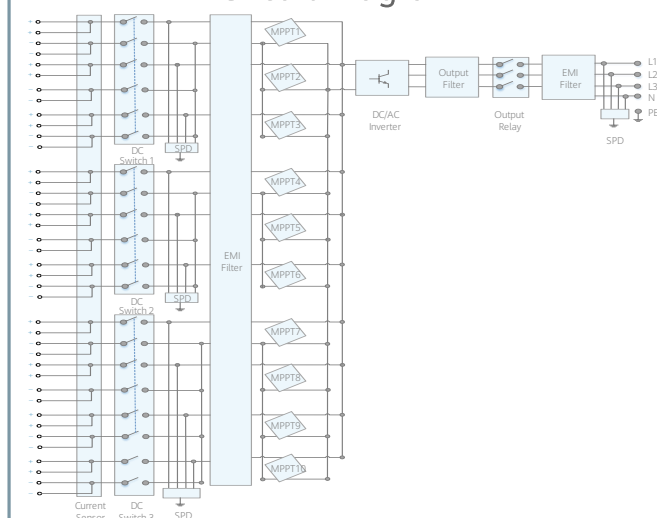

Technical Specifications

Efficiency	
Max. Efficiency	98.8% @480 V, 98.6% @380 V / 400 V
European Efficiency	98.6% @480 V, 98.4% @380 V / 400 V
Input	
Max. Input Voltage	1,100 V
Max. Current per MPPT	26 A
Max. Short Circuit Current per MPPT	40 A
Start Voltage	200 V
MPPT Operating Voltage Range	200 V ~ 1,000 V
Nominal Input Voltage	720 V @480 Vac, 600 V @400 Vac, 570 V @380 Vac
Number of Inputs	20
Number of MPP Trackers	10
Output	
Nominal AC Active Power	100,000 W
Max. AC Apparent Power	110,000 VA
Max. AC Active Power (cosφ=1)	110,000 W
Nominal Output Voltage	480 V / 400 V / 380 V, 3W+(N)+PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	120.3 A @480 V, 144.4 A @400 V, 152.0 A @380 V
Max. Output Current	133.7 A @480 V, 160.4 A @400 V, 168.8 A @380 V
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Protection ¹	Yes
AC Surge Protection ¹	Yes
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Arc Fault Protection	Optional
Communication	
Display	LED Indicators, WLAN + APP
USB	Yes
MBUS	Yes (isolation transformer required)
RS485	Yes
General	
Dimensions (W x H x D)	1,035 x 700 x 365 mm (40.7 x 27.6 x 14.4 inch)
Weight (with mounting plate)	90 kg (198.4 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4
AC Connector	Waterproof Connector + OT/DT Terminal
Protection Degree	IP66
Topology	Transformerless
Standard Compliance (more available upon request)	
Certificates	EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 61727, IEC 60068, IEC 61683

1- Compatible Type II protection class according to IEC / EN 61643-11

SUN2000-60KTL-M0

Smart String Inverter



6
MPP Trackers



98.9% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve
Diagnosis Supported



Residual Current
Monitoring Integrated



Fuse Free
Design




Surge Arresters for
DC & AC




IP65
Protection

Efficiency Curve

SUN2000-60KTL-M0 @480 V

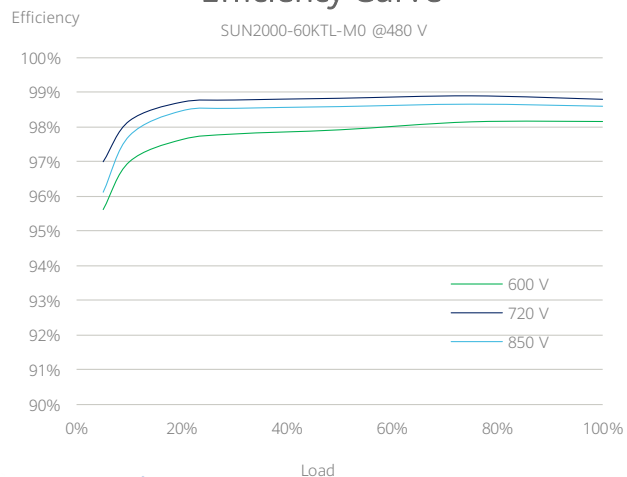

Circuit Diagram

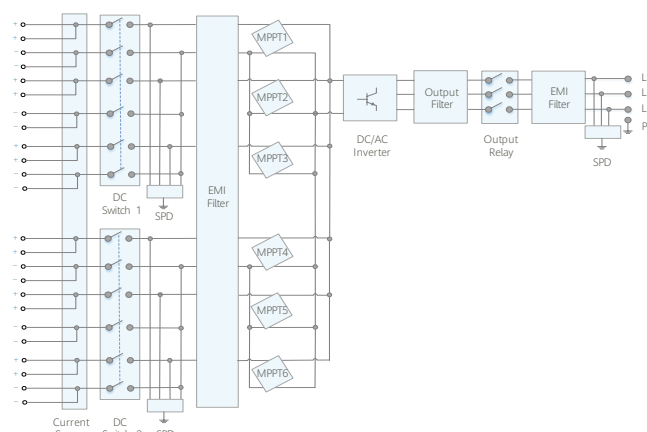

Technical Specifications

Efficiency	
Max. Efficiency	98.9% @480 V, 98.7% @380 V / 400 V
European Efficiency	98.7% @480 V, 98.5% @380 V / 400 V
Input	
Max. Input Voltage	1,100 V
Max. Current per MPPT	22 A
Max. Short Circuit Current per MPPT	30 A
Start Voltage	200 V
MPPT Operating Voltage Range	200 V ~ 1,000 V
Rated Input Voltage	720 V @480 Vac, 600 V @380 Vac / 400 Vac
Number of Inputs	12
Number of MPP Trackers	6
Output	
Rated AC Active Power	60,000 W
Max. AC Apparent Power	66,000 VA
Max. AC Active Power (cosφ=1)	66,000 W
Rated Output Voltage	480 V/ 400 V/ 380 V, 3W+(N)+PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Rated Output Current	72.2 A @480 V, 86.7 A @400 V, 91.2 A @380 V
Max. Output Current	79.4 A @480 V, 95.3 A @400 V, 100 A @380 V
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, Bluetooth/WLAN + APP
USB	Yes
RS485	Yes
MBUS	Yes
General	
Dimensions (W x H x D)	1,075 x 555 x 300 mm (42.3 x 21.9 x 11.8 inch)
Weight (with mounting plate)	74 kg (163.1 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Max. Operating Altitude	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Amphenol Helios H4
AC Connector	Waterproof PG Connector + OT Terminal
Protection Degree	IP65
Topology	Transformerless
Standard Compliance (more available upon request)	
Certificates	EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683, IEC 61727, ABNT NBR 16149, ABNT NBR 16150, ABNT NBR IEC 62116

SmartACU2000D

Smart Array Controller



With SmartPID2000 Module



Without SmartPID2000 Module



Smart

Support one-click commissioning
Patented anti-PID module



Simple

SmartPID2000 & Smartlogger3000B
pre-installed with multiple interfaces



Reliable

Industrial-level application
and high reliability

Technical Specifications	SmartACU2000D-D-00	SmartACU2000D-D-02	SmartACU2000D-D-01	SmartACU2000D-D-03
Configuration				
SmartLogger	SmartLogger3000B x 1			
SmartModule1000A	Optional			Standard with SmartModule1000A x 1
RS485	Supported			
Number of MBUS Module ¹	1	2	1	2
Number of SmartPID2000 Module	0	0	1	2
Environment				
Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)			
Relative Humidity	4% ~ 100%			
Max. Operating Altitude	4,000 m (13,123 ft.)			
Electrical				
AC Input Voltage for Cabinet	100 V ~ 240 V, L / N (L)+ PE			
AC Input Voltage for MBUS	380 V ~ 800 V, 3Ph			
AC Input Voltage for PID	380 V ~ 800 V, 3Ph + FE (Functional Earth)			
AC Input Frequency	50 Hz / 60 Hz			
Power Supply	Standard: 12 V DC, Optional: 24 V DC ²			
Mechanical				
Cable Entries	Bottom in & out			
Maintenance	Front			
Dimensions (W x H x D)	640 x 770 x 315 mm (25.2 x 30.3 x 12.4 inch)		880 x 770 x 369 mm (34.6 x 30.3 x 14.5 inch)	
Weight	29 kg (63.9 lb.)	32 kg (70.5 lb.)	49 kg (108.0 lb.)	61 kg (134.5 lb.)
Protection Degree	IP65			
Installation Options	Wall Mounting, Rack Mounting, Pole Mounting			


¹ - Compatible with communication mode of PLC (Power Line Communication).

² - 24V DC power supply is optional to power devices that require 24Vdc input and output.

SmartLogger3000B



Without SmartModule1000A

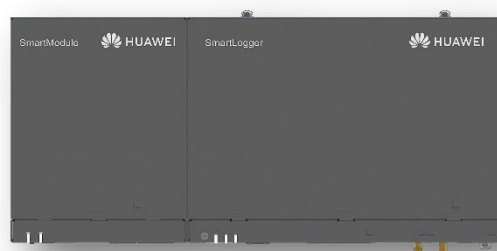

With SmartModule1000A



Smart

Connecting up to 150 inverters,
One-click commissioning



Simple

Deployment wizard allowed, including
parameters configuration, devices connection



Reliable

Safety improvement
by lightning protection module

Technical Specifications	SmartLogger3000B		SmartLogger3000B with SmartModule1000A
Device Management			
Max. Number of Manageable Devices	200		
Max. Number of Manageable Inverters	150		
Communication Interface			
WAN	WAN x 1, 10 / 100 / 1,000 Mbps		
LAN	LAN x 1, 10 / 100 / 1,000 Mbps	LAN x 3, 10 / 100 / 1,000 Mbps	
Optical Ethernet	SFP x 2, 100 / 1,000 Mbps		
MBUS	MBUS x 1, 115.2 kbps, Compatible with PLC		
RS485	COM x 3, 1,200 / 2,400 / 4,800 / 9,600 / 19,200 / 115,200 bps	COM x 6, 1,200 / 2,400 / 4,800 / 9,600 / 19,200 / 115,200 bps	
Digital / Analog Input / Output	DI x 4, DO x 2, AI x 4	DI x 8, DO x 2, AI x 7	
PT100 / PT1000	0	2	
Active DO	12 V, 100 mA (connection with relay, sensor)		
Communication Protocol			
Ethernet	Modbus-TCP, IEC 60870-5-104		
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645		
Interaction			
LED	LED Indicator x 3 – RUN, ALM, 4G	LED Indicator x 5 – RUN, ALM, 4G (Smartlogger3000B) & RUN, ALM (SmarModule1000A)	
WEB	Embedded Web		
USB	USB 2.0 x 1		
APP	Communication by WLAN for commissioning		
Environment			
Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)		
Storage Temperature Range	-40°C ~ 70°C (-40°F ~ 158°F)		
Relative Humidity (Non-condensing)	5% ~ 95%		
Max. Operating Altitude	4,000 m (13,123 ft.)		
Electrical			
Power Adapter	AC input: 100 V ~ 240 V, 50 Hz / 60 Hz; DC output: 12 V, 2 A		
DC Power Supply	24 V, 0.8 A		
Power Consumption	Typical 9 W, Max. 15 W	Typical 10 W, Max. 18 W	
Mechanical			
Dimensions (W x H x D, without mounting ears)	225 x 160 x 44 mm (8.9 x 6.3 x 1.7 inch)	350 x 160 x 44 mm (13.8 x 6.3 x 1.7 inch)	
Weight	2 kg (4.4 lb.)	3 kg (6.6 lb.)	
Protection Degree	IP20		
Installation Options	Wall Mounting, DIN Rail Mounting, Tabletop Mounting		

SmartPID2000 Module

Inside Smart Array Controller



The SmartPID2000 Module is installed in the SmartACU2000D cabinet to reduce the negative effect of the Potential Induced Degradation (PID), and support 1000 V / 1100 V / 1500 V DC system.



Smart


Data read and software upgrade through USB or the embedded Web



Reliable

Protection degree of IP65

SmartPID2000 Solution Diagram

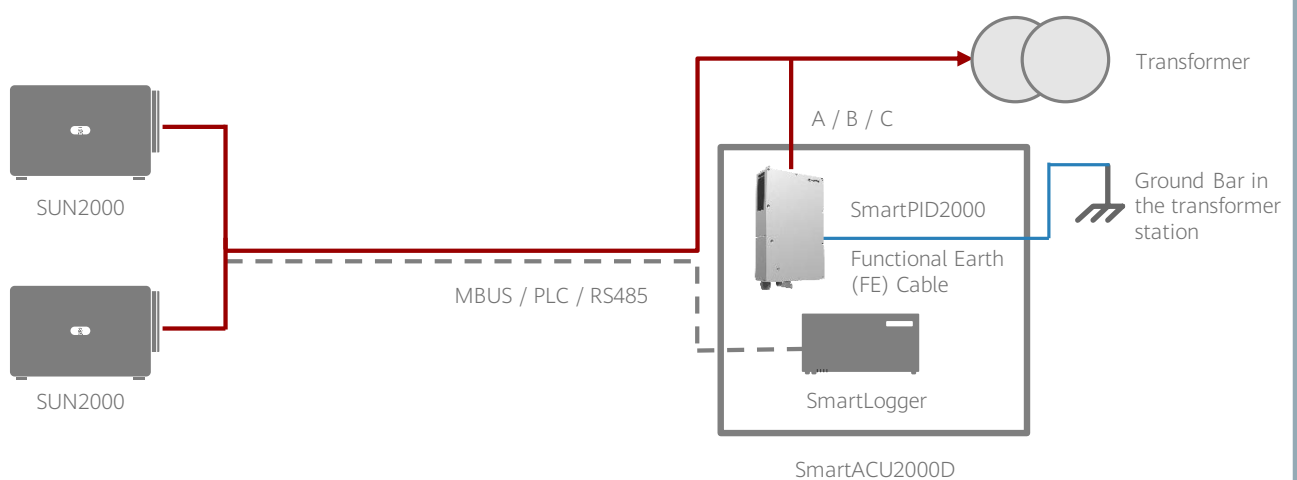


Note:

- 1 - The Anti-PID solution could ONLY be deployed in utility installations which are normally connected to the medium voltage (MV) grid running WITHOUT neutral line.
- 2 - The Anti-PID module must work with Huawei SmartLoggers and Huawei inverters.

Network Applications

I Optical Fiber Ring Network + MBUS / PLC

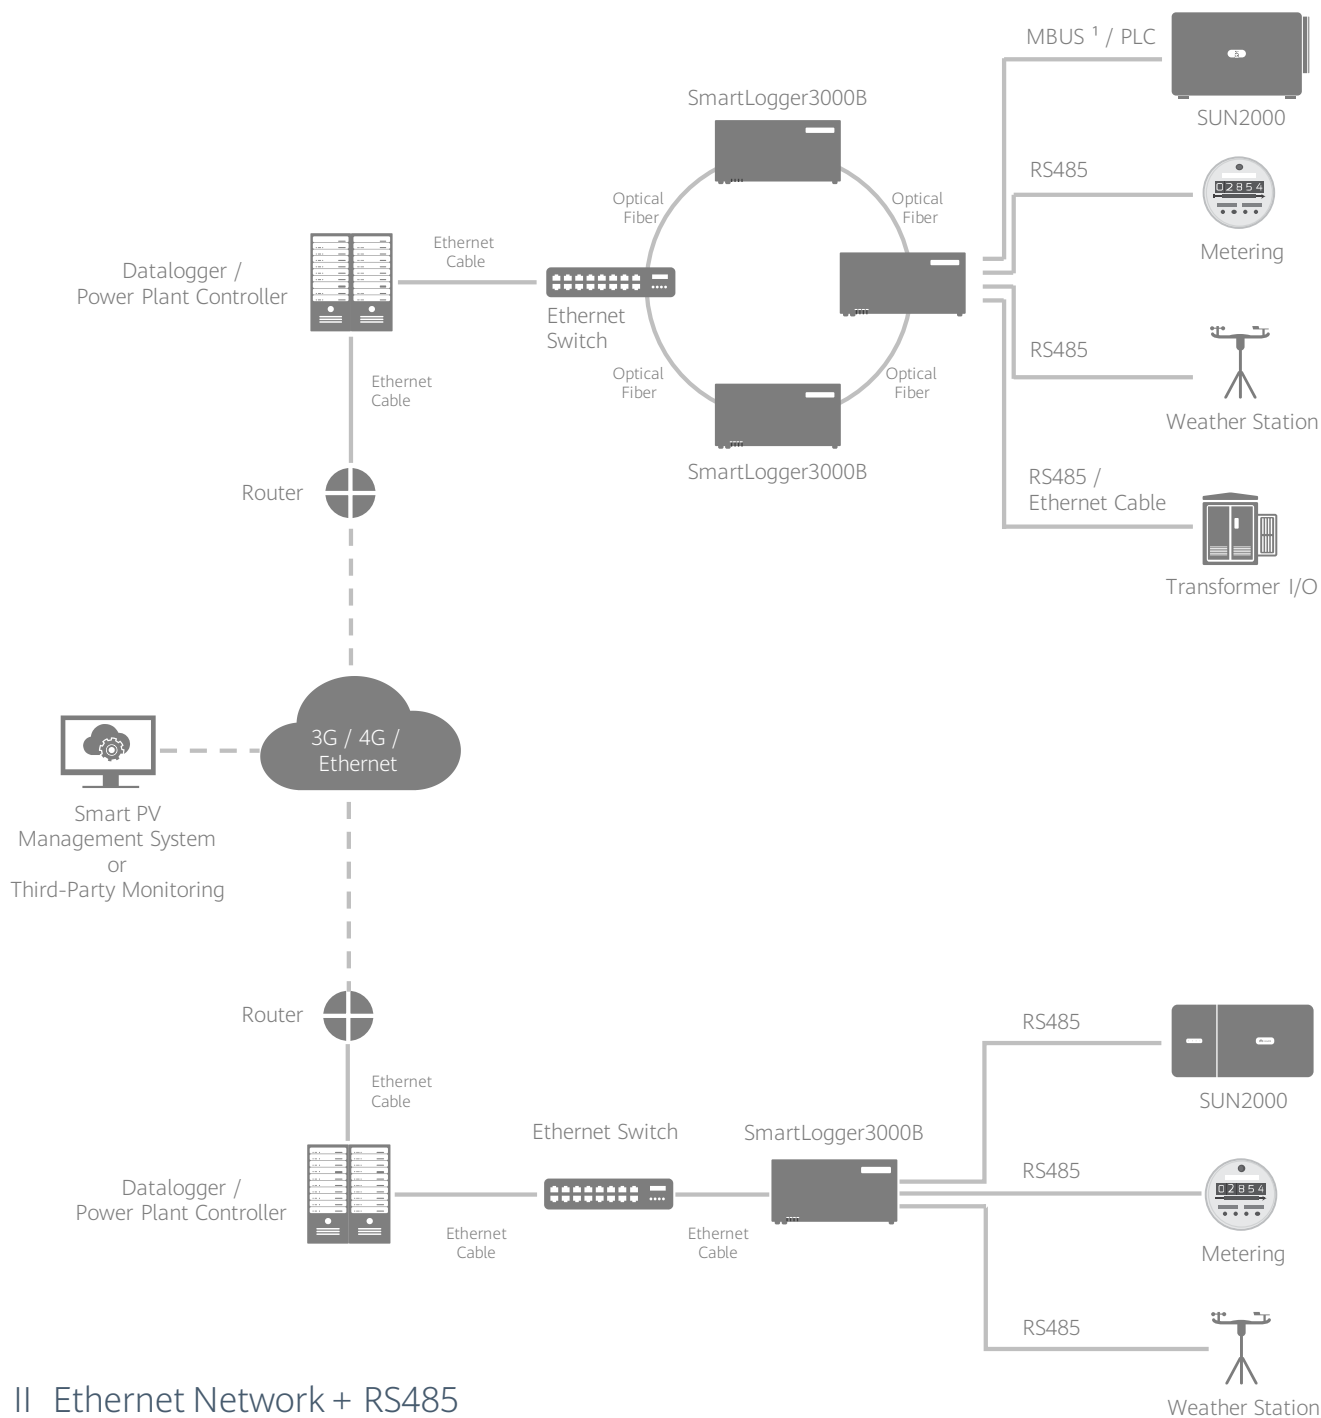

1 - Compatible with communication mode of PLC (Power Line Communication).

NetEco1000S



Smart

Auto faults alarming and reports issuing
Smart I-V Curve Diagnosis supported




Simple

One-click installation on PC
Fault alarms via SMS and E-mail



Reliable


Hierarchical management
Up to 25 years data storage

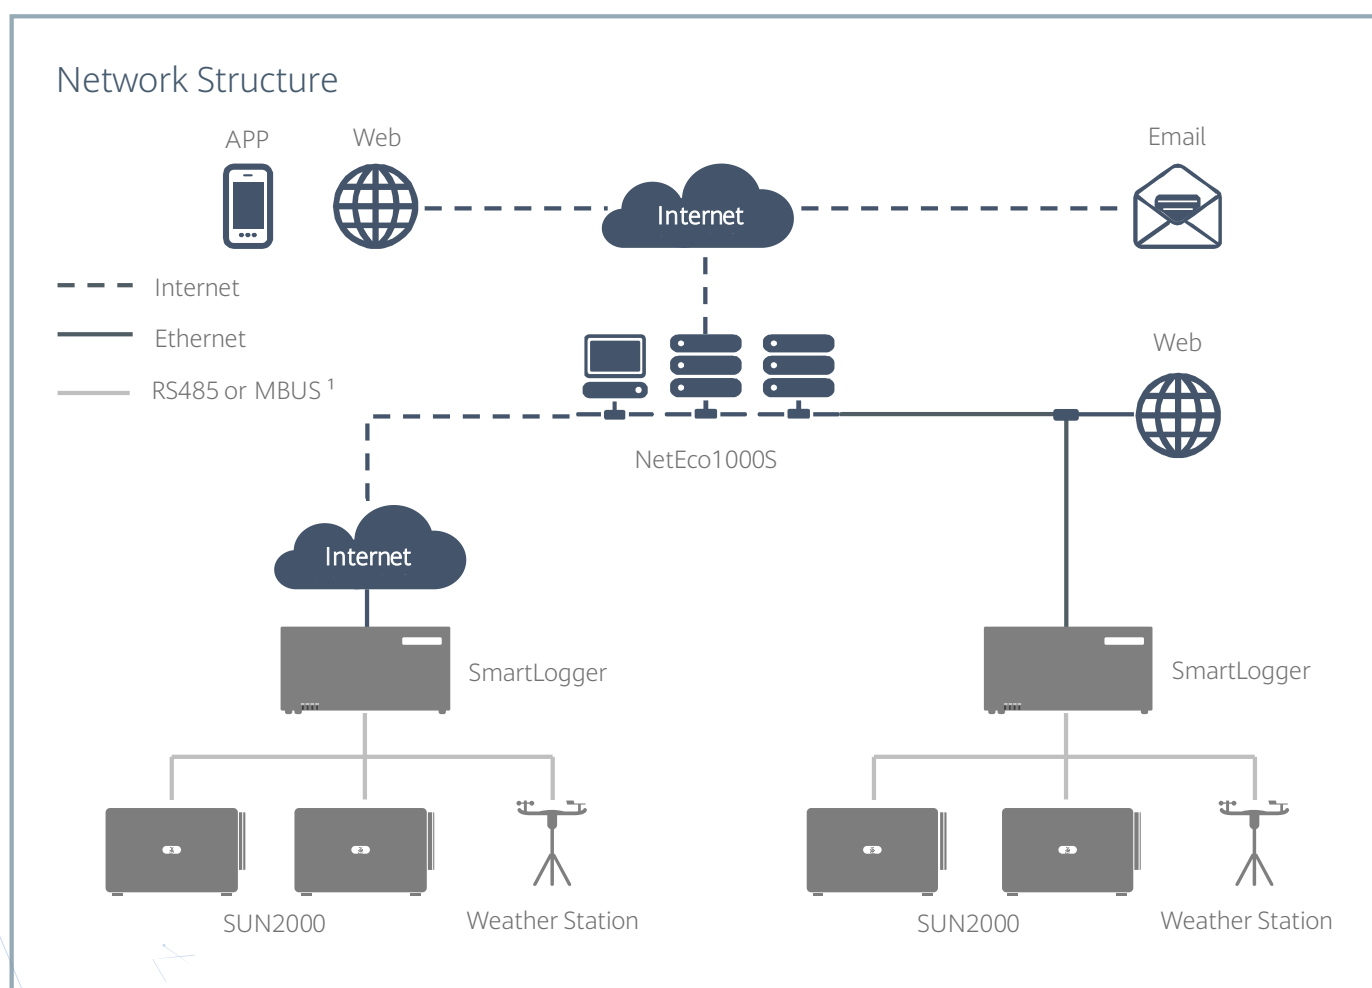

1 - Compatible with communication mode of PLC (Power Line Communication).

Smart I-V Curve Diagnosis

Smart I-V Curve Diagnosis is able to carry out online I-V curve analysis on entire strings with advanced diagnosis algorithm. The scanning would help to find out and identify the strings with low performance or malfunction, which would help to achieve proactive maintenance, higher O&M efficiency and lower operation cost.

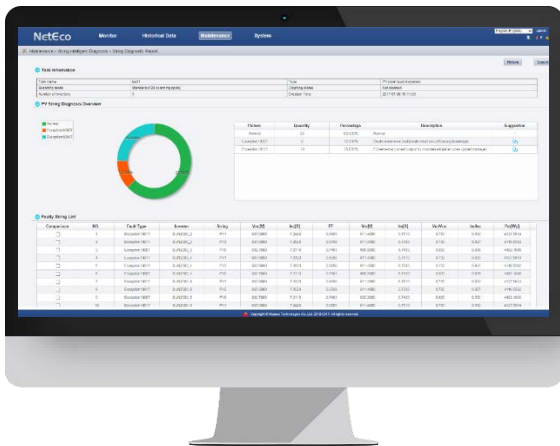

Smart

Support plant-level, array-level and inverter-level analysis and diagnosis

Automatically identify
different failure types and
provide recovery suggestion




Efficient

One-click scanning without onsite experts or equipment

Completing online I-V curve scanning on all strings of 100 MW plant within 15 minutes

Network Structure

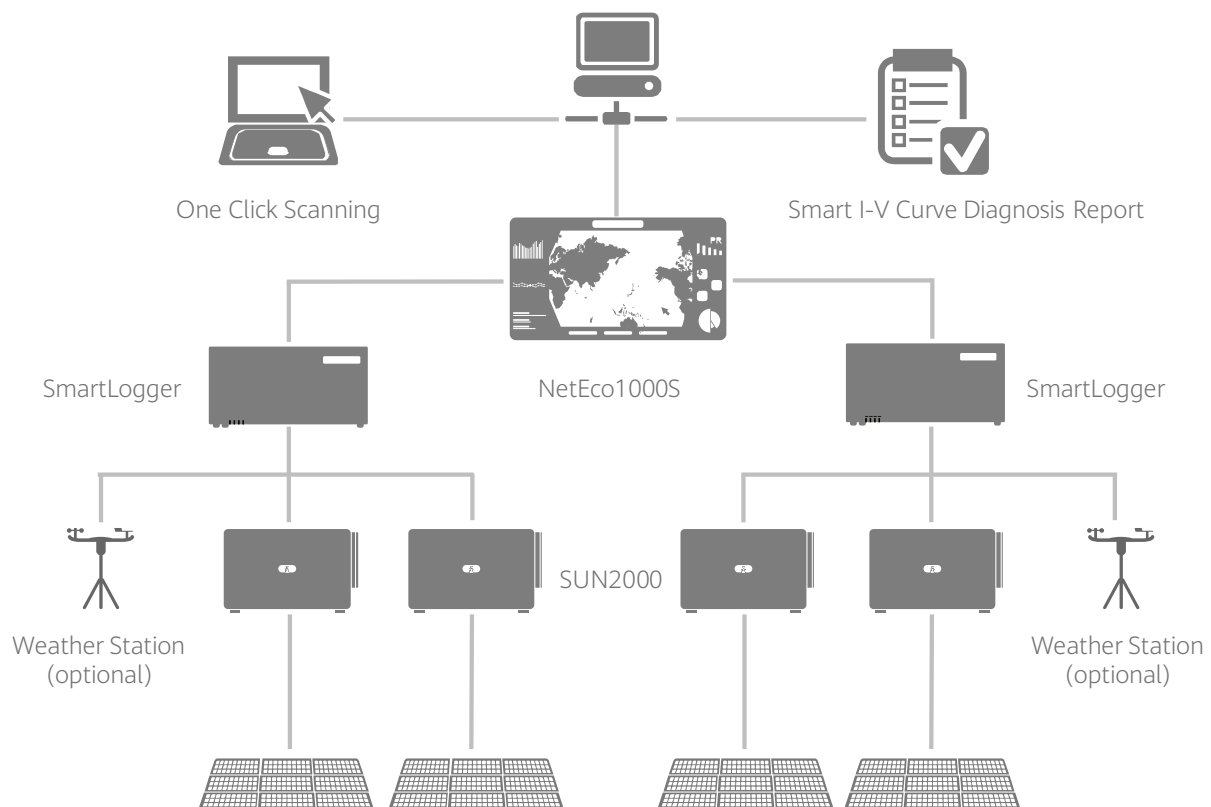


Smart I-V Curve Diagnosis


Technical Specifications	
Smart String Inverter	SUN2000-60KTL-M0, SUN2000-105KTL-H1, SUN2000-100KTL-M1, SUN2000-185KTL-H1
Data Logger	SmartLogger2000, SmartLogger3000B
Management System	NetEco1000S
Scanning Time	< 1s per string
Sampling Points per I-V Curve	128
Voltage Accuracy	0.5%rdg. + 1dgt. (rdg.>5, dgt.= 0.3)
Current Accuracy	0.5%rdg. + 2dgt. (rdg.>0.3, dgt.= 0.006)



Smart I-V Curve Diagnosis is TUV Verified

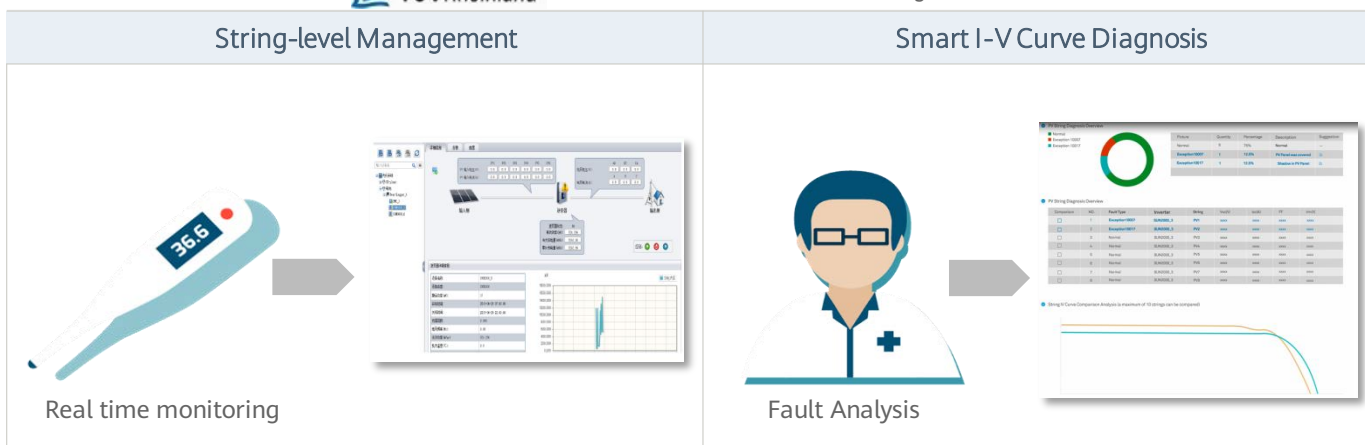

String I-V Curve Comparison

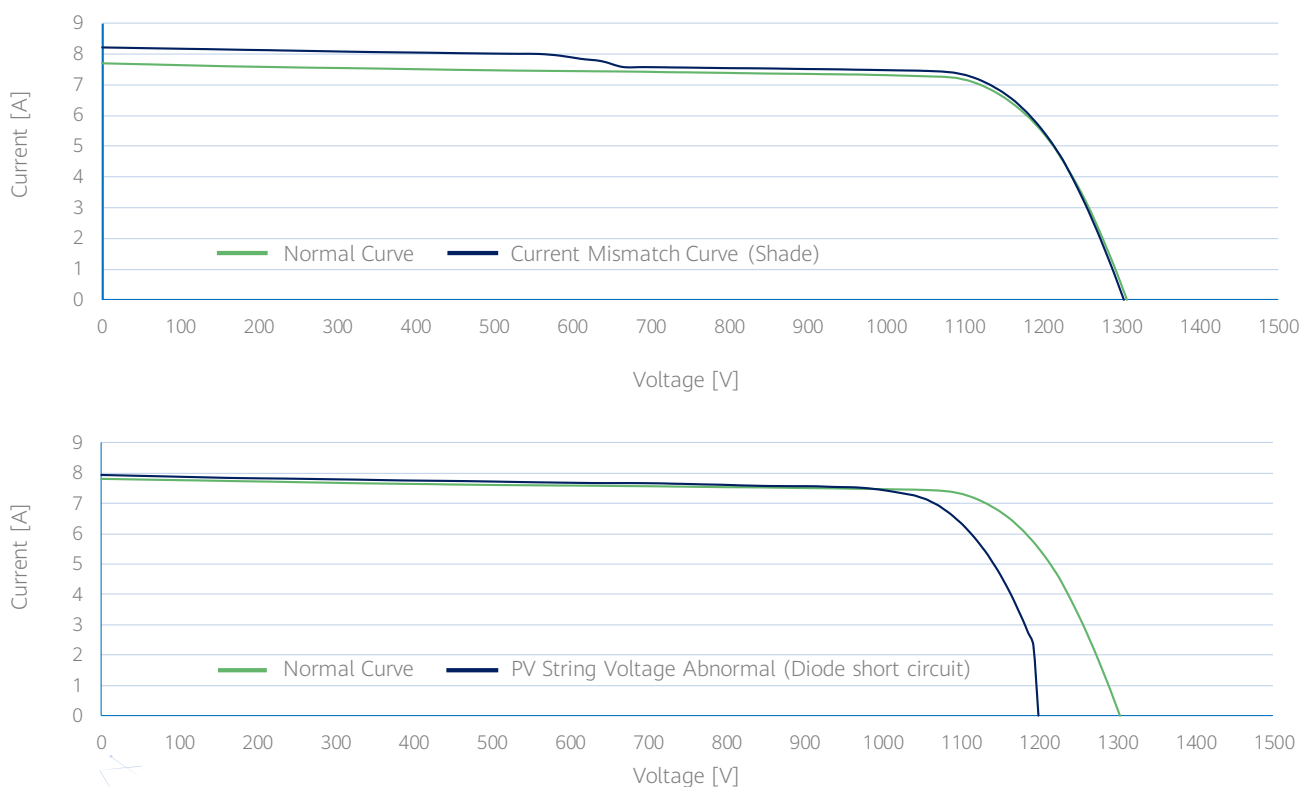

Smart PV Solution Reference



Tlaxcala, Mexico
Ground-mounted Smart PV Plant

Capacity
220 MW

Inverter Model
SUN2000-100KTL



La Paz, Mexico
Ground-mounted Smart PV Plant

Capacity
25 MW

Inverter Model
SUN2000-45KTL-US-HV



Jalisco, Mexico
Ground-mounted Smart PV Plant

Capacity
100 MW

Inverter Model
SUN2000-60KTL-HV

Smart PV Solution Reference



Jujuy, Argentina
Ground-mounted Smart PV Plant

Capacity
315 MW

Inverter Model
SUN2000-50KTL



San Juan, Argentina
Ground-mounted Smart PV Plant

Capacity
80 MW

Inverter Model
SUN2000-42KTL



Monte Plata, Dominican Republic
Ground-mounted Smart PV Plant

Capacity
66 MW

Inverter Model
SUN2000-30KTL

Smart PV Solution Reference



Chihuahua, Mexico
Ground-mounted Smart PV Plant

Capacity
120 MW

Inverter Model
SUN2000-100KTL



Phnom Penh, Cambodia
Ground-mounted Smart PV Plant

Capacity
60 MW

Inverter Model
SUN2000-65KTL-M0



Sabah, Malaysia
Mountain-mounted Smart PV Plant

Capacity
49 MW

Inverter Model
SUN2000-42KTL

Smart PV Solution Reference



Santiago, Chile
Portfolio of PMGD Smart PV Plant

Capacity
30 MW

Inverter Model
SUN2000-36KTL



Aulander, NC, USA
Ground-mounted Smart PV Plant

Capacity
120 MW

Inverter Model
SUN2000-45KTL-US-HV



Cuyama, CA, USA
Ground-mounted Smart PV Plant

Capacity
43 MW

Inverter Model
SUN2000-45KTL-US-HV

Smart PV Solution Reference



Yanchi, Ningxia, China
Largest Single PV Plant Worldwide

Capacity
1 GW

Inverter Model
SUN2000-40KTL



Hongdunzi, Ningxia, China
Largest Tracking System PV Plant Worldwide

Capacity
700 MW

Inverter Model
SUN2000-50KTL



Haining, Zhejiang, China
Largest Rooftop-mounted PV Plant Worldwide

Capacity
300 MW

Inverter Model
SUN2000-28KTL,36KTL,50KTL

Smart PV Solution Reference



Golmud, Qinghai, China
Ground-mounted Smart PV Plant

Capacity
590 MW


Inverter Model
SUN2000-20KTL,28KTL,40KTL



Datong, Shanxi, China
Mountain-mounted Smart PV Plant

Capacity
100 MW

Inverter Model
SUN2000-40KTL

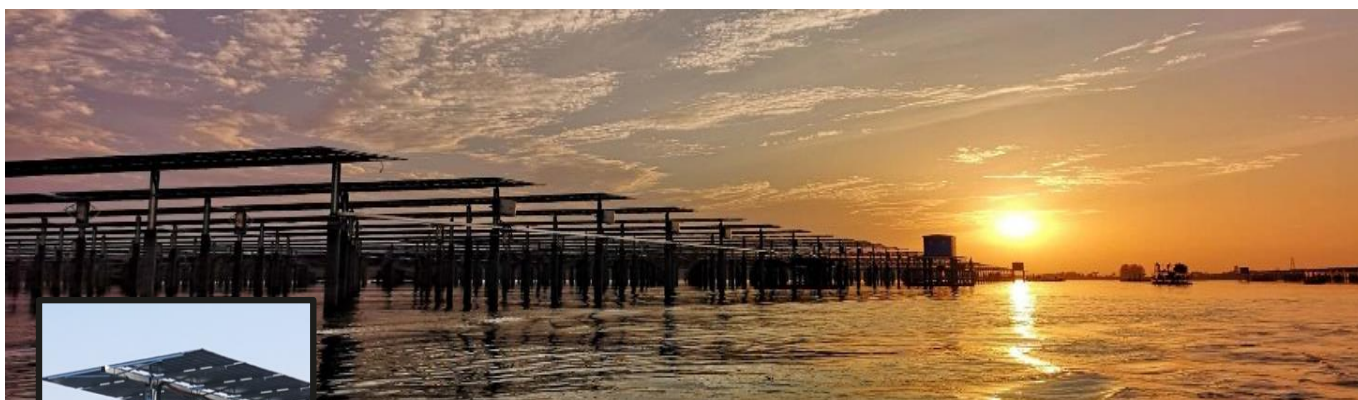

Sihong, Jiangsu, China
Water Surface Smart PV Plant

Capacity
100 MW

Inverter Model
SUN2000-100KTL

Smart PV Solution Reference



©BayWa r.e.

Seville, Spain
Ground-mounted Smart PV Plant

Capacity
175 MW

Inverter Model
SUN2000-100KTL, 60KTL-HV



Karaganda, Kazakhstan
Ground-mounted Smart PV Plant

Capacity
40 MW

Inverter Model
SUN2000-60KTL-HV



Requena, Valencia, Spain
Ground-mounted Smart PV Plant

Capacity
12 MW

Inverter Model
SUN2000-60KTL-HV

Smart PV Solution Reference



Delingha, Qinghai, China
Ground-mounted Smart PV Plant

Capacity
200 MW

Inverter Model
SUN2000-100KTL



Haixing, Hebei, China
Ground-mounted Smart PV Plant

Capacity
62 MW

Inverter Model
SUN2000-100KTL



Baicheng, Jilin, China
Ground-mounted Smart PV Plant

Capacity
26 MW

Inverter Model
SUN2000-100KTL

Smart PV Solution Reference



Pavagada, India
Ground-mounted Smart PV Plant

Capacity
300 MW

Inverter Model
SUN2000-95KTL-INH0



Ghani, India
Ground-mounted Smart PV Plant

Capacity
50 MW

Inverter Model
SUN2000-43KTL-IN



Krempendorf, Germany
Ground-mounted Smart PV Plant

Capacity
20 MW

Inverter Model
SUN2000-28KTL



Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

Huawei Technologies de México S.A. de C.V.

Av Santa Fe 440,
Lomas de Santa Fe, Contadero,
05348 Ciudad de Mexico

Huawei (Chile) S.A.

Rosario Norte 532, Of.1701-1704, Las Condes
Santiago, 8320000, Chile

Huawei do Brasil Telecomunicações Ltda.

Rua Arquiteto Olavo Redig de Campos
105-24º andar, São Paulo-CEP 04718-000

Huawei (Argentina) S.A.

Alem 815, 7th Floor
Buenos Aires, Argentina

HUAWEI TECHNOLOGIES CO., LTD.

Huawei Industrial Base, Bantian Longgang
Shenzhen 518129, P.R. China
Tel.: 400-822-9999
solar.huawei.com