


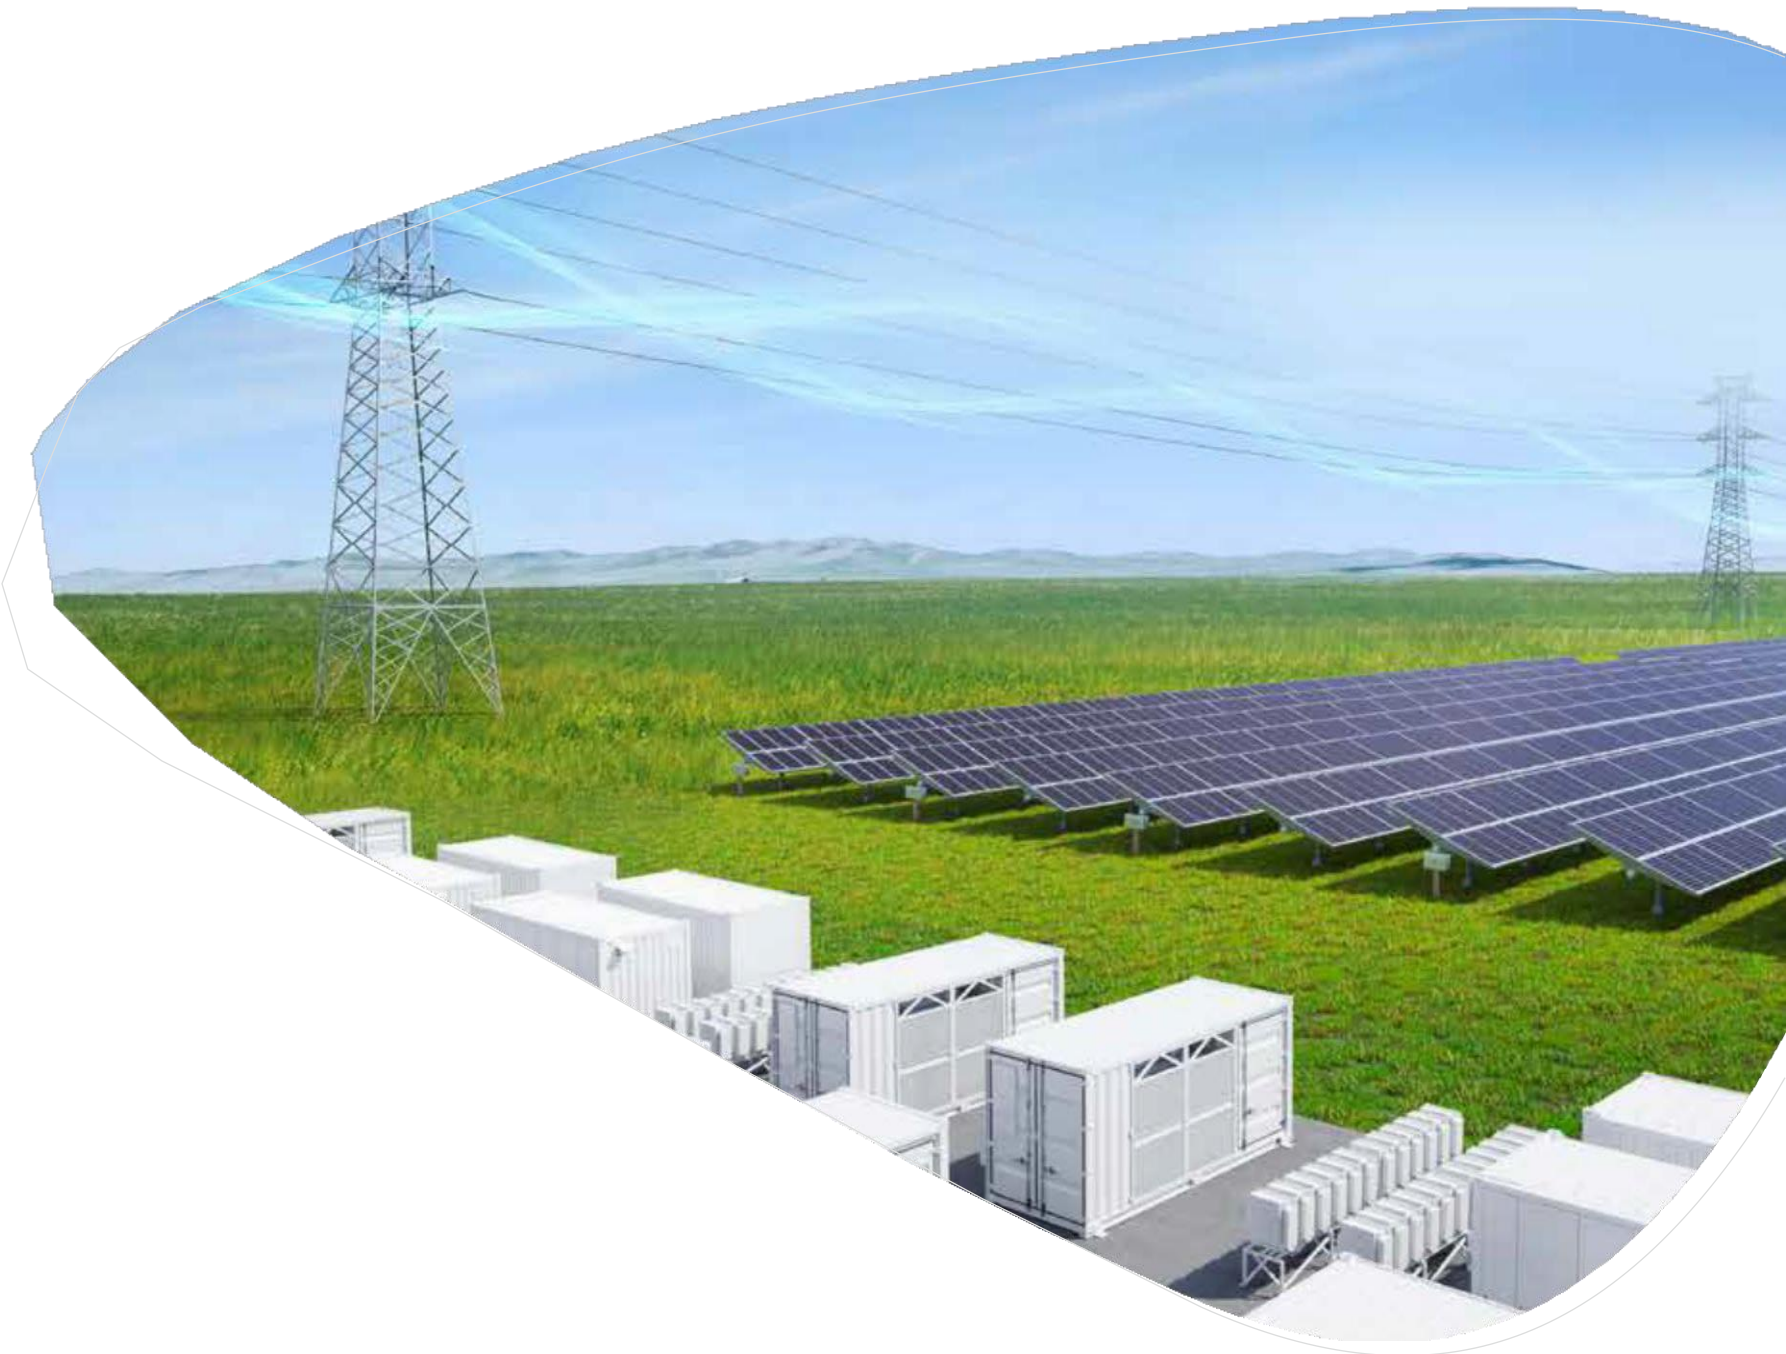

HUAWEI

Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO., LTD.

Huawei Industrial Base, Bantian Longgang
Shenzhen 518129, P.R. China

Tel: 400-822-9999

Solar.Huawei.com

Fusionsolar

Smart Microgrid Solution (MEA)

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version NO.01-(202406)

SOLAR.HUAWEI.COM

SOLAR.HUAWEI.COM



HUAWEI



About Huawei

Huawei is a leading global provider of information and communications technology (ICT) infrastructure and smart devices. With integrated solutions across four key domains - telecom networks, IT, smart devices, and cloud services - we are committed to bringing digital to every person, home and organization for a fully connected, intelligent world. Huawei's end-to-end portfolio of products, solutions and services are both competitive and secure. Through open collaboration with ecosystem partners, we create lasting value for our customers, working to empower people, enrich home life, and inspire innovation in organizations of all shapes and sizes. At Huawei, innovation focuses on customer needs. We invest heavily in basic research, concentrating on technological breakthroughs that drive the world forward.



Employees
208,000+



Employees Work in R&D
54%



Countries and Regions
170+



Interbrand
Best Global Brands
59nd




in Global R&D Investment
NO.6



Boston Consulting Group
Most Innovative Companies
8th

Smart Microgrid Solution

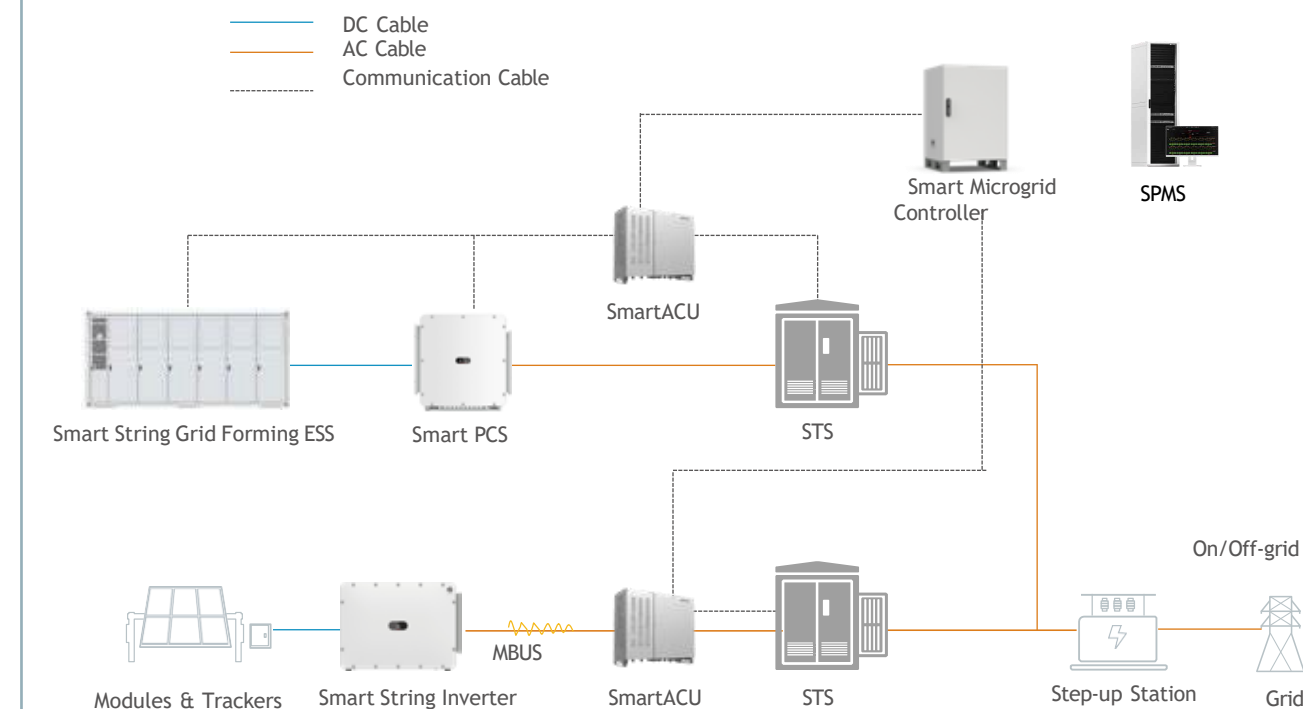

High quality & efficiency

stable & reliable

optimal LCOE

All Intelligence




► SPPC2000-MGCC
Smart Microgrid Controller



Technical Specifications

Model	SPPC2000-MGCC A01		SPPC2000-MGCC A02
Device Management			
Networking Mode	Active/Standby and Master-Slave Control Mode		
Features			
Seamless planned on/off-grid switching	0ms		
Seamless unplanned on/off-grid switching	No more than 200 ms		
Multi-time-scale frequency and voltage control	Response delay < 10 ms		
Waveform Recording Function	Supports Instantaneous Value (0.5ms) and rms Value Recording of Current and Voltage		
Time Synchronization Function	Supports IRIGB (≤ 1 ms) and Other Time Synchronization Protocols (e.g. , NTP)		
Circuit Breaker Status Acquisition and Control	Yes		
Simulation Model	PSSE, DigSILENT, PSCAD		
PT/CT Sampling current	1A	5A	
Coordinated control	Supports black start, PV&BESS&DG economic scheduling , anti-counterflow control, demand control, TOU		
Communication interaction			
Ethernet	6 + 2		
Optical Ethernet	SFP x 2, 100 / 1,000 Mbps		
RS485	COM x 4		
Current/Voltage Sampling	6U + 6I		
CAN	2		
Communication protocol	Modbus-TCP, IEC60870-5-104, GOOSE		
Interaction			
WEB	support		
HMI	Smart Energy Management System		
General Parameters			
Dual power supply	AC: 90 V~264 V, 47 Hz ~ 63 Hz DC: 110 V ± 10%, 220 V ± 10%	Weight	≤ 80 kg (Without Pallet and Optional Components)
Rated AC power	90W	Dimensions (H/L/W)	1000 x 650 x 650 mm (Within Base 100mm)
Rated DC power	60 W (Excluding Network Switches)	Operating Temperature Range	-25℃ - 60℃
Rated AC Input Frequency	50Hz/60Hz	Relative Humidity	0% ~ 100% (Non-condensing)
DC/AC Surge Arrester	Type II	Maximum operating altitude	4,000 m
Current Sampling Precision	0.2%	Protection grade	IP55
Voltage Sampling Precision	0.2%	Anticorrosion grade	C5-Medium
Power Precision	0.5%	Installation mode	Floor Mounting / Wall Mounting

► SPMS2000
Smart Plant Management System

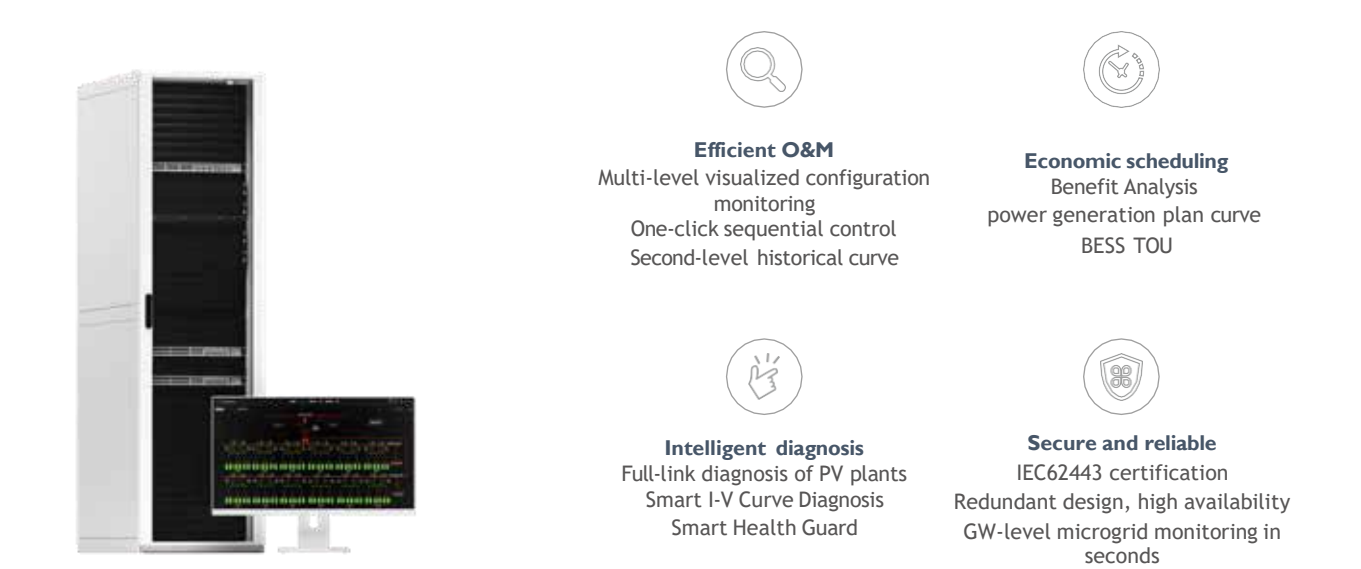


*Product does not include workstation equipment

Technical Specifications


Parameter Type	Parameter Description		
cabinet			
W x D x H	600mm×1200mm×2200mm (47u)	Weight	Net weight approx. 210 kg, full configuration approx. 600 kg
Temperature	5 - 30℃	Power supply	200V~240V, 50/60Hz
Protection Grade	IP20	Altitude	≤4000m
Server			
Model	TaiShan 200 (2280)	Hard disk	8*1.92T SATA SSD
W x D x H	482.6mm*790mm*88.9mm(2U)	Fan	Four hot-swappable fans in N+1 redundancy
CPU	2*Kunpeng 920 - 48core @2.6GHz	External Interface	8*GE
Database	GaussDB	Power supply	2 x 900 W, 1+1 redundancy
Operating system	EulerOS	Net weight	Approx. 30 kg
Memory	4*64G	Certification	CCC/CE/RoHS, etc.
Switches			
Model	CloudEngine S5735-S24ST4XE-V2	CloudEngine S5735-S24T4XE-V2	
W x D x H	442mm*420mm*43.6mm (1U)	442mm*420mm*43.6mm (1U)	
Net Weight	4.95 kg	4.34 kg	
Memory	2 GB	2 GB	
Power Supply	2 x 180 W, 1+1 redundancy	2 x 180 W, 1+1 redundancy	
Interface	Eight gigabit electrical ports, four 10GE optical ports, and 24 gigabit optical ports	24 GE electrical ports and 4 10GE optical ports	
Rated Voltage	100V AC~240V AC; 50/60Hz	100V AC~240V AC; 50/60Hz	
Certification	CE/VCCI, etc.	CE/VCCI, etc.	

► Smart Health Guard

Smart Health Guard applies Smart technology to analyze real-time operational data from energy storage plant. By fully inspecting the entire plant—from cells, battery packs, racks, BESS cabinets, PCSs, arrays, to grid connection points—it processes collected data through multiple fault mechanism models and big data analytics for risk identification. It helps customers achieve risk early warning and maintenance guidance. Highly efficient digitalized operations and maintenance reduce the investment and ensure the safe, healthy, and stable high-quality operation of energy storage plant.

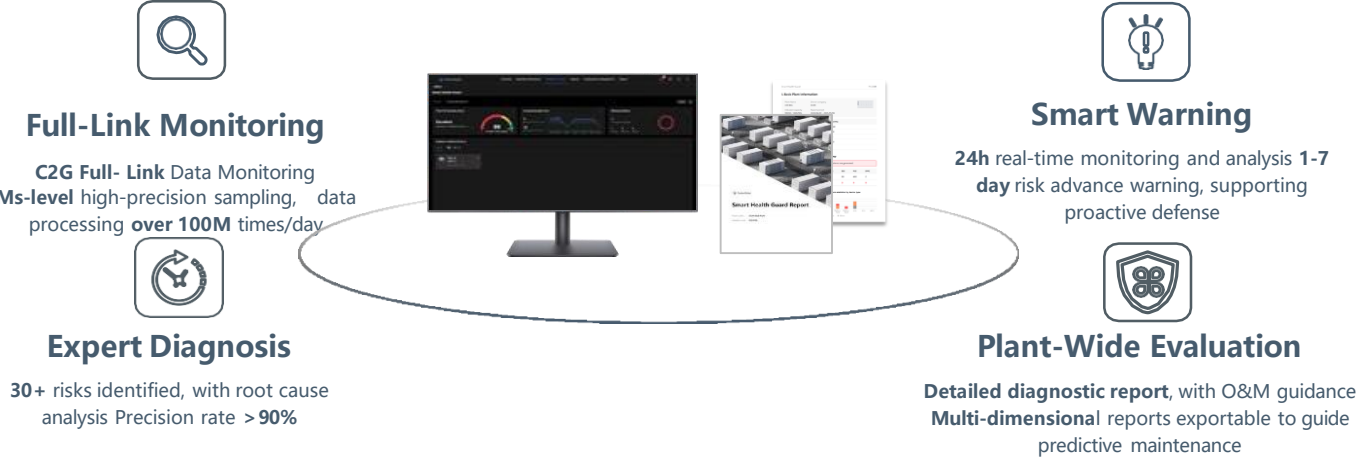

► Grid Networking Architecture

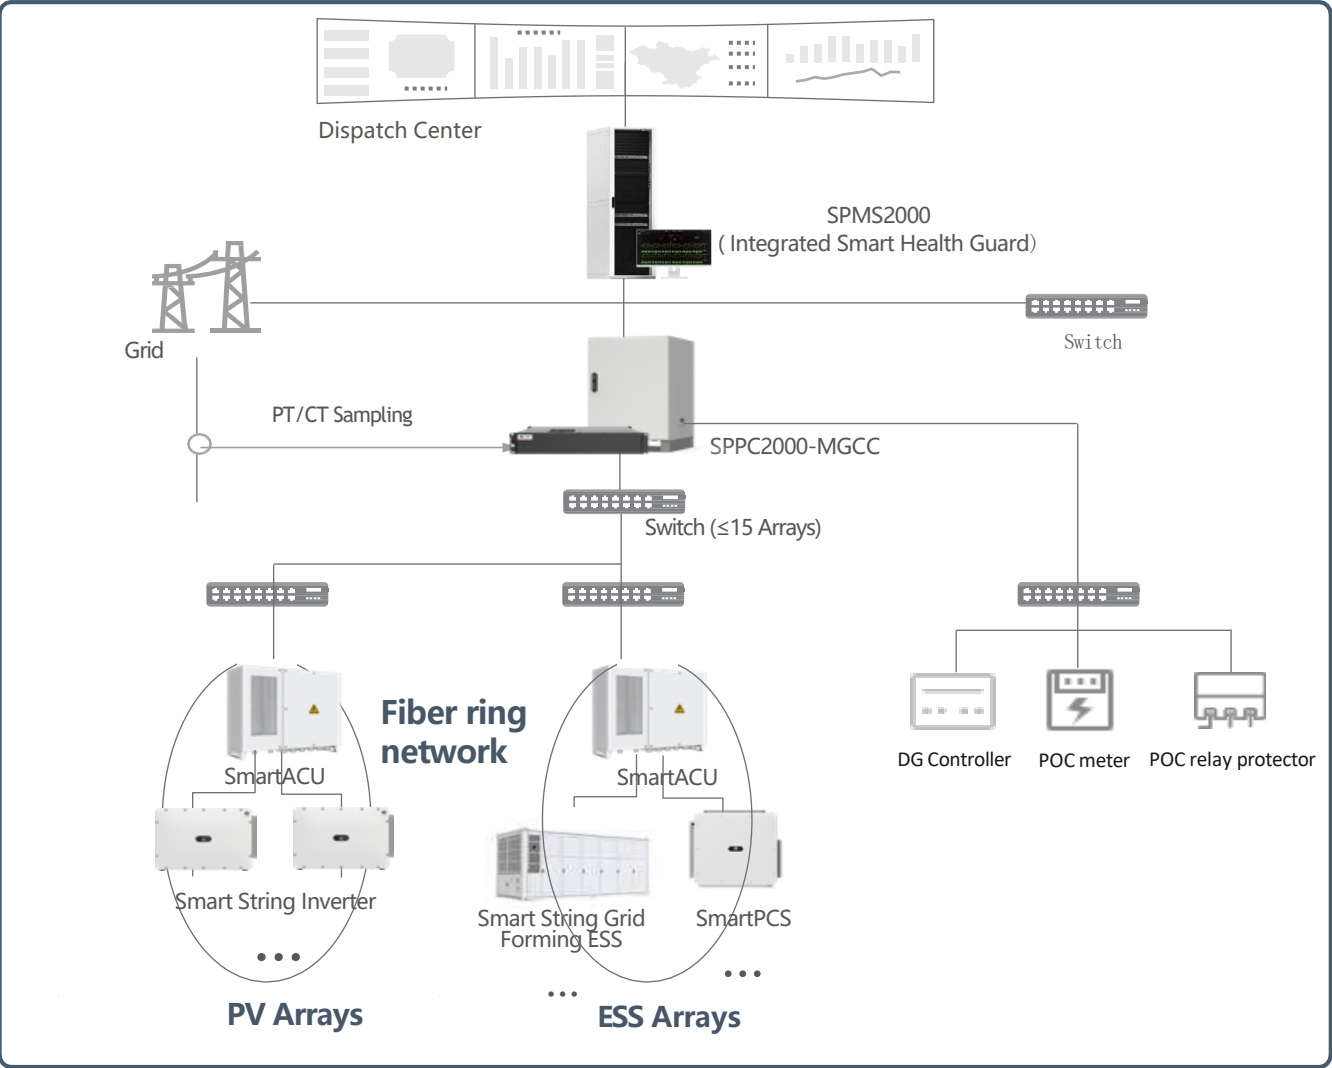

► SmartACU2000D
Smart Array Controller



- Smart**
Support one-click commissioning
Patented anti-PID module
- Simple**
SmartPID2000 & Smartlogger3000B pre-installed with multiple interfaces
- Reliable**
Industrial-level application and high reliability

Model	SmartACU2000D-D-I I
Configuration	
SmartLogger	SmartLogger3000B x 1
SmartModule1000A	SmartModule1000A
RS485	Standard
Number of MBUS Module ¹	2
Number of SmartPID2000	2
Switch with 4*SFP and 8*100 / 1,000 Mbps	Standard with 2
Smart Insulation Monitoring Function	Support
Environment	
Operating Temperature Range	-40°C ~ 60°C
Relative Humidity	0% ~ 100%
Max. Operating Altitude	4,000 m
Electrical	
AC Input Voltage for Cabinet	100 V~240 V, L / N (L)+ PE
AC Input Voltage for MBUS	380 V ~ 800 V, 3Ph
AC Input Voltage for PID	380 V ~ 800 V, 3Ph + FE (Functional Earth)
AC Input Frequency	50 / 60 Hz
Power Supply	Standard: 12 V DC
Mechanical	
Cable Entries	Bottom in & out
Maintenance	Front
Dimensions (W x H x D)	880 x 770 x 369 mm
Weight	66 kg
Protection Degree	IP65
Installation Options	Wall Mounting, Rack Mounting, Pole Mounting

1: Compatible with communication mode of PLC (Power Line Communication).

Model: LUNA2000-5015-2S

Smart String Grid Forming ESS



All-architecture Safety



All-scenario
Grid forming



All-lifecycle
Cost-effectiveness



All-rounder
Digitalization

Battery Container	
Model	LUNA2000-5015-2S
DC Rated Voltage	1,331.2 V
DC Max. Voltage	1,500 V
Nominal Energy Capacity	5,015 kWh
Charge & Discharge Rate	≤ 0.5 CP
Rated Power	2,507.5 kW
Dimension (W x H x D)	6,058 x 2,896 x 2,438 mm
Weight	< 43 t
Operation Temperature Range	-30°C ~ 55°C
Storage Temperature Range	-40°C ~ 60°C
Relative Humidity	0 ~ 100% (Non-condensing)
Max. Operating Altitude	4,700 m
Cooling Method	Liquid Cooling
Fire Suppression System	Water Sprinkler, NOVEC 1230
Communication Interface	Ethernet / SFP
Communication Protocol	Modbus TCP
Protection Degree	IP55
Anti-corrosion Degree	C5-Medium
Standards Compliance	
RoHS, IEC62477-1, IEC62040-1, IEC61000-6-2, IEC62933-5-2, UL9540A, IEC62619, UN38.3, etc.	
Battery Pack	
Cell Material	LFP
Number of Cell	104
Nominal Capacity	314 Ah / 104.49 kWh
Protection Degree	IP65
Weight	< 710 kg
Dimensions (W x H x D)	785 x 249 x 2135 mm

Model: LUNA2000-2507-2S (Preliminary)

Smart String Grid Forming ESS



All-architecture Safety



All-scenario
Grid forming



All-lifecycle
Cost-effectiveness



All-rounder
Digitalization

Battery Container	
Model	LUNA2000-2507-2S
DC Rated Voltage	1,331.2 V
DC Max. Voltage	1,500 V
Nominal Energy Capacity	2,507 kWh
Charge & Discharge Rate	≤ 0.5 CP
Rated Power	1,253.5 kW
Dimension (W x H x D)	6,058 x 2,896 x 2,438 mm
Weight	< 27 t
Operation Temperature Range	-30°C ~ 55°C
Storage Temperature Range	-40°C ~ 60°C
Relative Humidity	0 ~ 100% (Non-condensing)
Max. Operating Altitude	4,700 m
Cooling Method	Liquid Cooling
Fire Suppression System	Water Sprinkler, NOVEC 1230
Communication Interface	Ethernet / SFP
Communication Protocol	Modbus TCP
Protection Degree	IP55
Anti-corrosion Degree	C5-Medium
Standards Compliance	
RoHS, IEC62477-1, IEC62040-1, IEC61000-6-2, IEC62933-5-2, UL9540A, IEC62619, UN38.3, etc.	
Battery Pack	
Cell Material	LFP
Number of Cell	104
Nominal Capacity	314 Ah / 104.49 kWh
Protection Degree	IP65
Weight	< 710 kg
Dimensions (W x H x D)	785 x 249 x 2135 mm

► Model: LUNA2000-2236-1S
Smart String Grid Forming ESS



All-architecture Safety



All-scenario
Grid forming



All-lifecycle
Cost-effectiveness



All-rounder
Digitalization

Battery Container	
Model	LUNA2000-2236-1S
DC Rated Voltage	1,331.2 V
DC Max. Voltage	1,500 V
Nominal Energy Capacity	2,236 kWh
Charge & Discharge Rate	≤ 1 CP
Rated Power	2,236 kW
Dimension (W x H x D)	6,058 x 2,896 x 2,438 mm
Weight	< 28 t
Operation Temperature Range	-30°C ~ 55°C
Storage Temperature Range	-40°C ~ 60°C
Relative Humidity	0 ~ 100% (Non-condensing)
Max. Operating Altitude	4,700 m
Cooling Method	Liquid Cooling
Fire Suppression System	Water Sprinkler, NOVEC 1230
Communication Interface	Ethernet / SFP
Communication Protocol	Modbus TCP
Protection Degree	IP55
Anti-corrosion Degree	C5-Medium
Standards Compliance	
RoHS, IEC62477-1, IEC62040-1, IEC61000-6-2, IEC62933-5-2, UL9540A, IEC62619, UN38.3, etc.	
Battery Pack	
Cell Material	LFP
Number of Cell	52
Nominal Capacity	280 Ah / 46.59 kWh
Protection Degree	IP65
Weight	< 410 kg
Dimensions (W x H x D)	785 x 249 x 2135 mm

Model: LUNA2000-PCS-SKID-H0
Smart PCS SKID



Support Transportation
with Pallets



Hot and Cold
Air Duct Isolation



Cable Integration

General Parameter	
Model	LUNA2000-PCS-SKID-H0
Configuration Description	36 Smart PCS + 4 Power Distribution Cabinet
Max. DC Voltage	1,500 V
Rated AC Voltage	800V
Dimension (W x H x D)	6,058 x 2,896 x 2,438 mm
Weight	< 15 t
Operating Temperature Range	-25°C~ 60°C
Storage Temperature Range	-40°C~ 70°C
Operating Relative Humidity	0 ~ 100% (Non-condensing)
Max. Operating Altitude	4,700 m
Protection Class	I
Cooling Method	Smart Air Cooling
Protection Degree	IP55
Anti-corrosion Degree	C5
Standards Compliance	
IEC/EN62477-1, EN 55011, EN61000, EN/IEC 63000 etc.	

► LUNA2000-213KTL-H0

Smart PCS



Max.
Efficiency 99%



Modular
Design



IP66
Protection



Built-in Intelligent
Active
Breaking Device




Dual-stage
Architecture




Smart Grid
Forming
Algorithm

Efficiency Curve

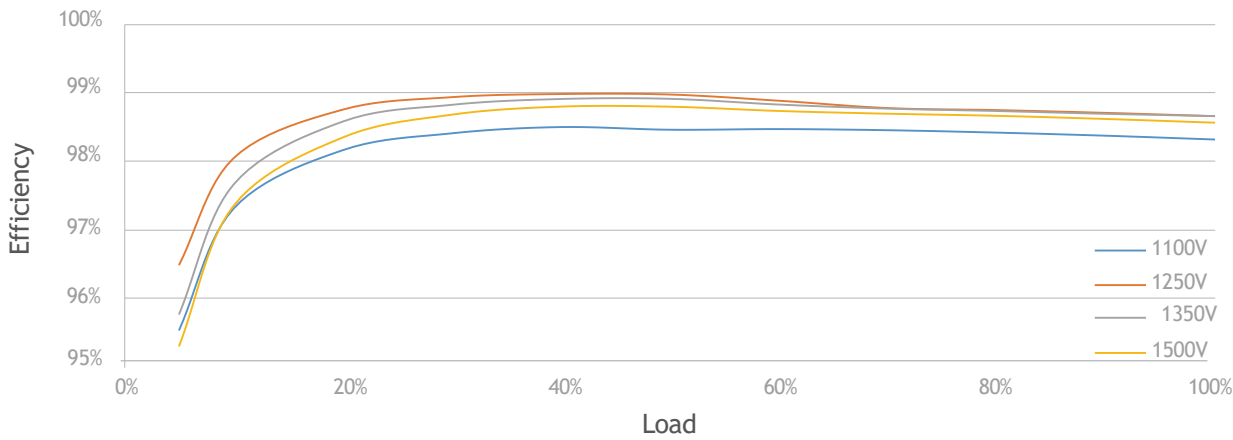

Circuit Diagram

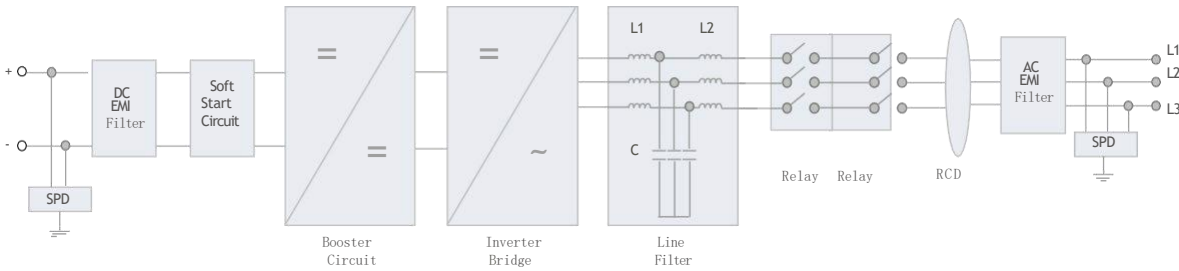


LUNA2000-213KTL-H0

Technical Specifications (Preliminary)

Efficiency	
Max. Efficiency	99.01%
DC Side	
Rated DC Voltage	1,331 V
Max. DC Voltage	1,500 V
Operating DC Voltage Range	800 V ~ 1,500 V
Rated Power Operating Voltage Range	1100V ~ 1500 V
Max. DC Current	218.5 A
Max. Number of Inputs	1
AC Side	
Rated AC Active Power	213,000 W @40°C; 192,000 W @50°C
Max. Apparent Power	257,700 VA
Max. Active Power (cosφ=1)	257,700 W
Rated AC Voltage	800 V
Rated AC Grid Frequency	50 Hz / 60 Hz
Max. AC Current	170.6 A
Adjustable Power Factor Range	-1 ... +1
Max. Total Harmonic Distortion	Off-grid: THDu ≤ 1.5%; On-grid: THDi ≤ 1% (rated)
Protection	
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
Insulation Resistance Detection	Yes
Residual Current Protection	Yes
DC Surge Protection	Type II
AC Surge Protection	Type II
Communication	
Display	LED Indicators, USB data cable + APP
USB	Yes
Communication Protocol	Ethernet, CAN
General	
Dimension (W x H x D)	875 x 865 x 365 mm
Weight	≤ 110 kg
Operating Temperature Range	-25°C ~ 60°C
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,700 m
Relative Humidity	0 ~ 100% (Non-condensing)
DC Connector	OT / DT Terminal
AC Connector	OT / DT Terminal
Protection Degree	IP66
Anti-corrosion Degree	C5-Medium
Topology	Transformerless
Operation mode	Support PQ/VSG mode
Standards Compliance	
GB/T 34120, GB/T 34133, IEC/EN62477-1, etc.	

► JUPITER-9000K/6000K/3000K-H1

Smart Transformer Station

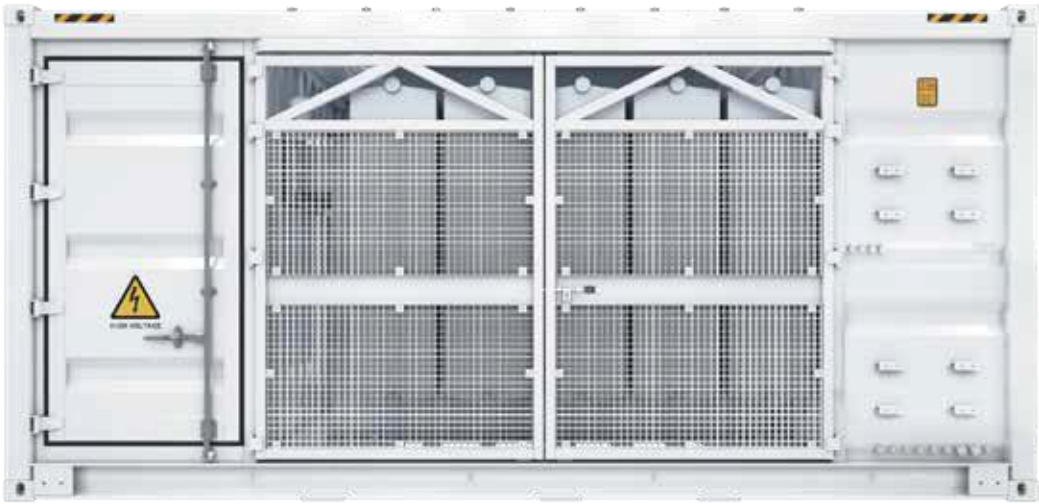

Simple

Prefabricated and pre-tested,
no Internal cabling needed onsite
Compact 20' HC container design for easy transportation



Efficient

High efficiency transformer for higher yields
Lower self-consumption for higher yields



Smart


Real-time detection of transformer,
LV panel and RMU high precision sensor
of LV electricity parameters
Remote control of ACB and MV circuit breaker



Reliable

Robust design against harsh environments optimal cooling
Design for high availability and easy O&M
Comprehensive tests from components, device to solution

Schematic Diagram

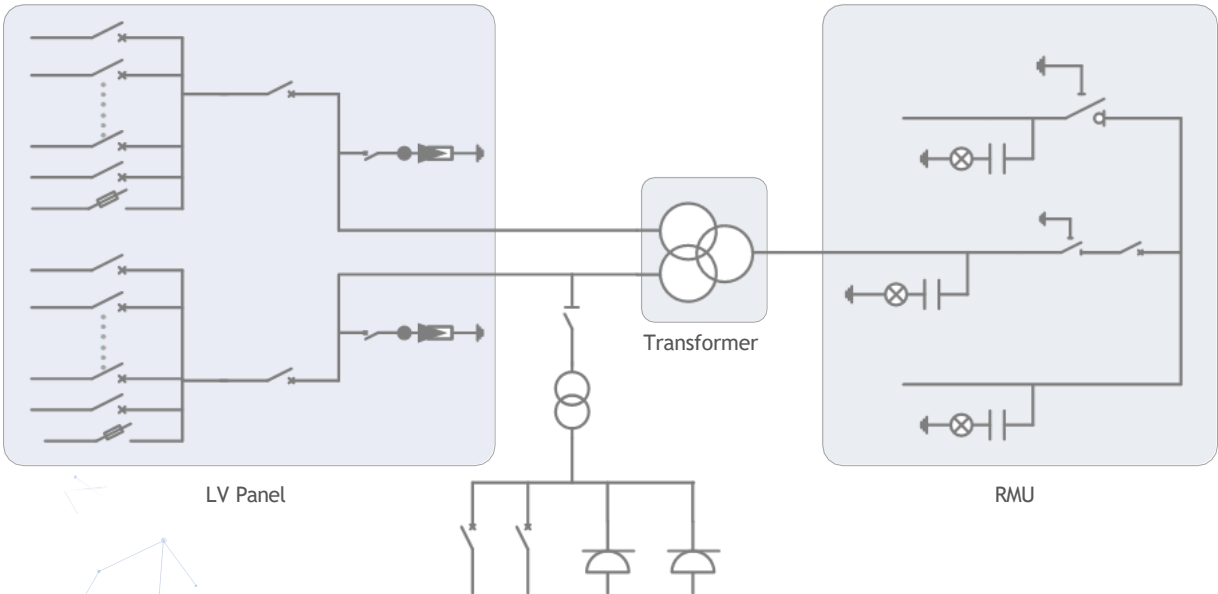

Technical Specifications

Model	JUPITER-9000K-H1	JUPITER-6000K-H1	JUPITER-3000K-H1
Input			
Available Inverters / PCS	SUN2000-330KTL-H1 / SUN2000-330KTL-H2 / LUNA2000-200KTL-H1		
Max. LV AC Inputs	30	22	11
AC Power	9,000 kVA @40°C ¹	6,600 kVA @40°C ¹	3,300 kVA @40°C ¹
Rated Input Voltage	800 V		
LV Panel Segregation	Form 2b		
LV Main Switches	ACB (4,000 A, 2 x 1 pcs)	ACB (2,900 A, 2 x 1 pcs)	ACB (2,900 A, 1 x 1 pcs)
LV Main Switches for Inverters / PCS	MCCB (400 A, 2 x 15 pcs)	MCCB (400 A, 2 x 11 pcs)	MCCB (400 A, 11 pcs)
Output			
Rated Output Voltage	10-35 kV ²		
Frequency	50 Hz or 60 Hz		
Transformer Type	Oil-immersed, Conservator Type		
Transformer Cooling Type	ONAN		
Transformer Tappings	± 2 x 2.5%		
Transformer Oil Type	Mineral Oil (PCB Free)		
Transformer Vector Group	Dy11-y11	Dy11	
Transformer Min. Peak Efficiency Index	Tier 1 or Tier 2 In Accordance with EN 50588-1		
RMU Type	SF₆ Gas Insulated		
RMU Transformer Protection Unit	MV Vacuum Circuit Breaker Unit		
RMU Cable Incoming / Outgoing Unit	Direct Cable Unit or Cable Load Break Switch Unit		
Auxiliary Transformer	Dry Type Transformer, 5 kVA, Single-phase, li0		
Output Voltage of Auxiliary Transformer	230 / 127 Vac		
Protection			
Transformer Detection & Protection	Oil Level, Oil Temperature, Oil Pressure and Buchholz		
Protection Degree of MV & LV Room	IP 54		
Internal Arcing Fault of STS	IAC A 20 kA 1s		
MV Relay Protection	50/51, 50N/51N		
LV Overvoltage Protection	Type I+II		
Anti-rodent Protection	C5-Medium		
Features			
2 kVA UPS	Optional ³		
MV Surge Arrester for Transformer	Optional ³		
General			
Dimensions (W x H x D)	6,058 x 2,896 x 2,438 mm (20' HC ISO Container)		
Weight	< 28 t	< 23 t	< 15 t
Operating Temperature Range	-25°C ~ 60°C ⁴		
Relative Humidity	0% ~ 95% (Non-condensing)		
Max. Operating Altitude	1,000 m ⁵		
MV-LV AC Connections	Prewired and Pretested, No Internal Cabling Onsite		
LV & MV Room Cooling	Smart Cooling without Air-across for Higher Availability		
Communication	Modbus TCP, Preconfigured with SmartACU2000D		
Standards Compliance			
IEC 62271-202, EN 50588-1, IEC 60076, IEC 62271-200, IEC 61439-1			

1: More detailed AC power of STS, please refer to the de-rating curve.
2: Rated output voltage from 10 kV to 35 kV, more available upon request.
3: Extra expense needed for optional features which standard product doesn't contain, more options upon request.
4: When ambient temperature ≥ 55°C, awning shall be equipped for STS on site by customer.
5: For higher operating altitude, pls consult with Huawei.

►► SUN2000-330KTL-H2

Smart String Inverter

For MEA, Eurasian



Max. Efficiency
≥ 99.0%



Smart Connector-level Detection (SCLD)



Smart Self-cleaning Fan (SSCF)



IP66 Protection



MBUS Supported



Smart String-level Disconnection (SSLD)




Smart IV Curve Diagnosis Supported




Surge Arresters for DC & AC

Efficiency Curve

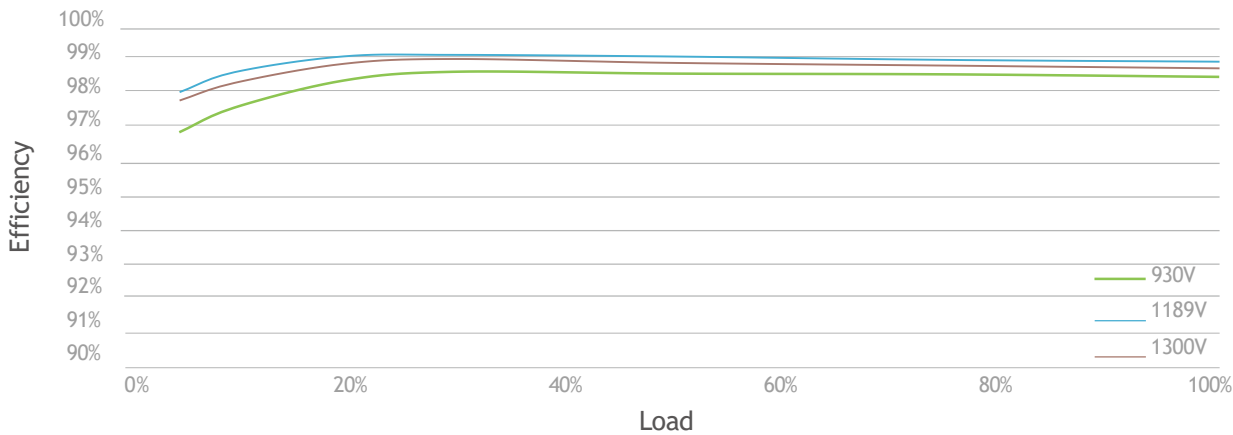

Circuit Diagram

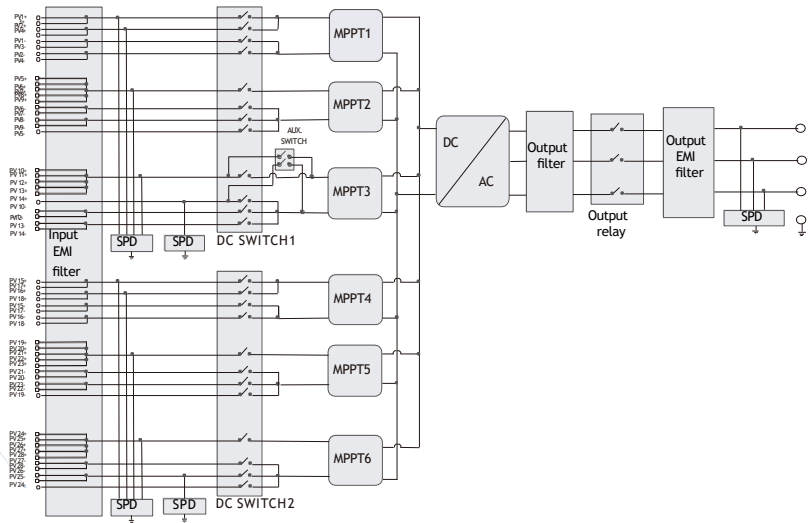

Technical Specifications

Efficiency	
Max. Efficiency	> 99.0%
European Efficiency	> 98.8%
Input	
Max. Input Voltage	1,500 V
Number of MPPT	6
Max. Current per MPPT	65 A
Max. Short Circuit Current per MPPT	115 A
Max. PV Inputs per MPPT	4/5/5/4/5/5
Start Voltage	550 V
MPPT Operating Voltage Range	500 V ~ 1,500 V
Nominal Input Voltage	1,080 V
Output	
Nominal AC Active Power	275,000 W ¹
Max. AC Apparent Power	330,000 VA
Max. AC Active Power (cosφ=1)	330,000 W
Nominal Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	198.5 A
Max. Output Current	238.2 A
Adjustable Power Factor Range	0.8 LG ...0.8 LD
Total Harmonic Distortion	THD _i < 1% (Rated)
Protection	
Smart String-level Disconnection (SSLD)	Yes
Smart Connector-level Detection (SCLD)	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Detection	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Detection Unit	Yes
Communication	
Display	LED Indicators, USB data cable + APP
USB	Yes
MBUS	Yes
RS485	Yes
General	
Dimensions (W x H x D)	1,048 x 753 x 395 mm
Weight (with mounting plate)	≤ 112 kg
Operating Temperature Range	-30°C ~ 60°C
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating	4,000 m
Relative Humidity	0 ~ 100% (Non-condensing)
DC Connector	HH4SFD4TMS / HH4SMD4TMS
AC Connector	Support OT / DT Terminal (Max. 400 mm²)
Protection Degree	IP 66
Anti-corrosion Protection	C5-Medium
Topology	Transformerless
Standards Compliance	
IEC 62109-1/-2, IEC 62920, IEC 60947-2, EN 50549-2, IEC 61683, etc.	

1: Environmental temperature is 50°C

➤ Smart String Inverter (Preliminary)
SUN2000-506KTL-H2



Max. Efficiency
≥99%



Smart Connector-level
Detection (SCLD)



Smart Self-Cleaning Fan
(SSCF)



Smart IV Curve
Diagnosis Supported



Smart String-Level
Disconnection (SSLD)





Harp ThermoSiphon
(HTS)



Smart Fan
Anti-Icing



Grid-Forming
Supported

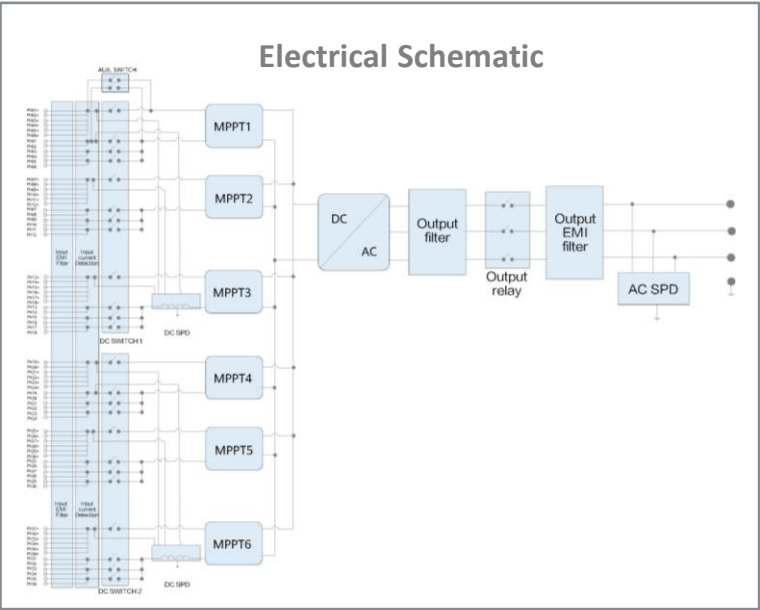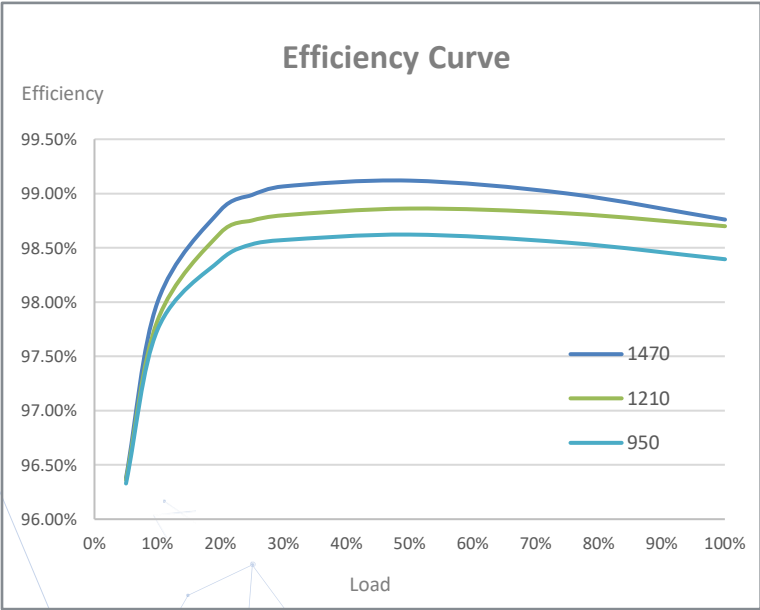


➤ Technical Specifications

Efficiency	
Max. Efficiency	99.04%
European Efficiency	98.8%
Input	
Max. Input Voltage ¹	1500 V
Number of MPPT	6
Max. Current per MPPT	105 A
Max. Short Circuit Current per MPPT	180 A
Max. PV Inputs per MPPT	6
MPPT Operating Voltage Range	500 V ~ 1500 V
Nominal Input Voltage	1200 V
Output	
Nominal AC Active Power	420,000 W
Max. AC Apparent Power	506,000 VA
Max. AC Active Power (cosφ=1)	506,000 W
Nominal Output Voltage	1000 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Nominal Output Current	242.5 A
Max. Output Current	292.2 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Total Harmonic Distortion	THDi < 1% (Rated)
Protection	
Smart String-level Disconnection (SSLD)	Yes
Smart Connector-level Detection (SCLD)	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Detection	Yes
Smart Self-Cleaning Fan/Intelligent Fan Anti-Icing	Yes
AC/DC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Detection Unit	Yes
Communication	
Display	LED Indicators
MBUS ²	Dual Channel
General	
Dimensions (W x H x D)	1065 x 800 x 400 mm
Weight (with mounting plate)	130 kg
Operating Temperature Range	-25 °C ~ 60 °C
Cooling Method	Smart Air Cooling
Max. Operating Altitude without Derating ³	5000 m (> 4000 m Derating)
Relative Humidity	0 ~ 100% (Non-Condensing)
DC Connector	HH4SFD4TMS / HH4SMD4TMS
AC Connector	Support OT / DT Terminal
Noise Level	75dB in Typical
Protection Degree	IP 66
Anti-corrosion Protection	C5-Medium
Topology	Transformer Less
Standards Compliance	
IEC 62109-1/-2, IEC 62920, IEC 60947-2, EN 50549-2, IEC 61683, etc.	

1. The withstand voltage on the DC side of the inverter can reach 1600V.
2. The RS485 interface has been removed and the MBUS communication is used instead.
3. The inverter will not operate at derating power with the altitudes at / under 4000 m.

➤ Smart Transformer Station (Preliminary)

JUPITER-11000K/7000K/3000K-HD1(Built-in SACU)

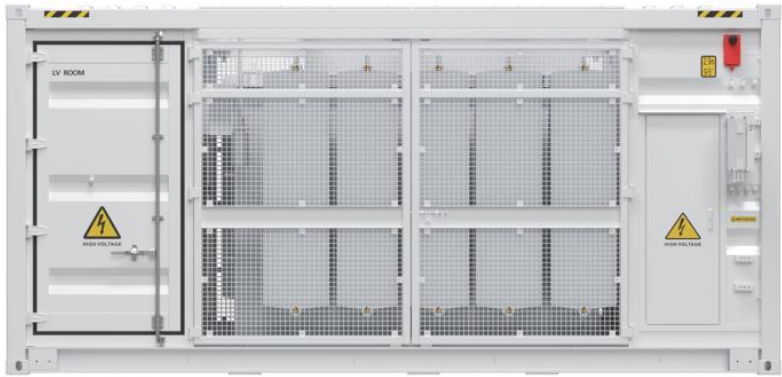

Simple

Prefabricated and Pre-tested, No Internal Cabling Needed Onsite
Compact 20' HC Container Design for Easy Transportation



Efficient

High Efficiency Transformer for Higher Yields
Lower Self-consumption for Higher Yields



Safe

Meets IEC 61641; Up to Class C arcing protection on LV side;
Update the function for MV protection; Change to upward arc discharge; Meets IEC 62271-202 IAC-A



Smart

Real-time Detection of Transformer, LV Panel and RMU
High Precision Sensor of LV Electricity Parameters
Remote Control of ACB and MV Circuit Breaker



Reliable


Robust Design against Harsh Environments
Optimal Cooling Design for High Availability and Easy O&M; Comprehensive Tests from Components; Device to Solution



Environmental Protection

STS Can support natural ester vegetable oils Environmentally friendly
Oil-free sump design, Simplify O&M
Natural gas insulation, free of F-gases, is more environmental friendly.
Voltage ≤24KV

1. More detailed AC power of STS, please refer to the de-rating curve.
2. Rated output voltage from 10 kV to 35 kV, more available upon request.
3. Natural Gas Insulated, up to 24 kV, the switchgear contains the insulating gas Clean Air 0543. Clean Air is a natural gas (Natural-Origin-Gas) according to IEC 62271-4.
4. Extra expense needed for optional features which standard product doesn't contain, more options upon request.
5. When ambient temperature ≥55°C, awning shall be equipped for STS on site by customer.
6. For higher operating altitude, please consult with Huawei.

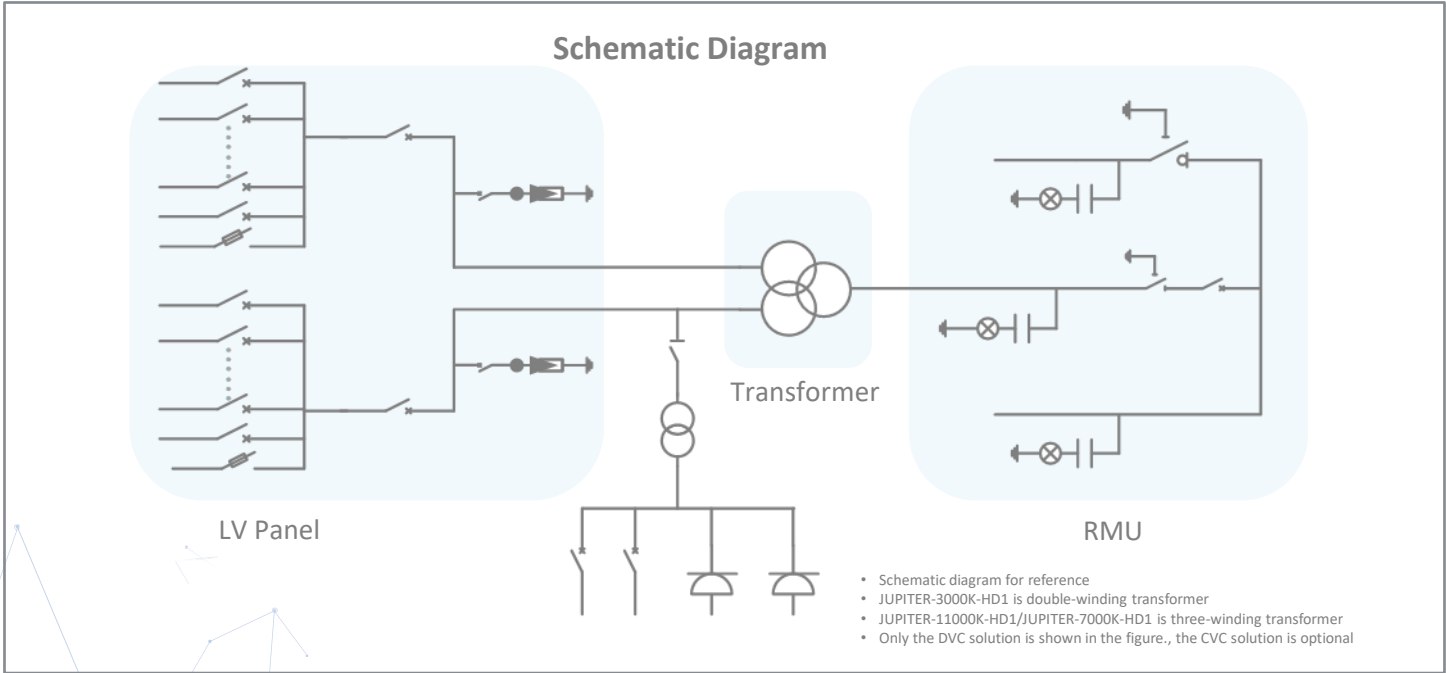

Technical Specifications	JUPITER-11000K-HD1(built-in SACU)	JUPITER-7000K-HD1(built-in SACU)	JUPITER-3000K-HD1(built-in SACU)
	Input		
Available Inverters / PCS	SUN2000-400+KTL-H1 / SUN2000-400+KTL-H2		
Max. MCCB inputs	24	16	8
Max. LV AC Inputs	24	16	8
AC Power	11,040 kVA @40°C ¹	7,360 kVA @40°C ¹	3,680 kVA @40°C ¹
Rated Input Voltage	1000 V		
LV Panel Segregation	Form 2b		
LV Main Switches	ACB (4,000 A, 2 x 1 pcs)	ACB (2,900 A, 2 x 1 pcs)	ACB (2,900 A, 1 x 1 pcs)
LV Main Switches	MCCB (400 A, 2 x 12 pcs)	MCCB (400 A, 2 x 8 pcs)	MCCB (400 A, 8 pcs)
Output			
Rated Output Voltage	10~35 kV ²		
Frequency	50 Hz or 60 Hz		
Transformer Type	Oil-immersed, Conservator Type		
Transformer Cooling Type	Mineral Oil: ONAN Natural Ester: KNAN		Mineral Oil: ONAF
Transformer Tappings	± 2 x 2.5%		
Transformer Oil Type	Mineral Oil (PCB Free)/Natural ester oil (Optional)		
Transformer Vector Group	Dy11-y11		Dy11
Transformer Min. Peak Efficiency Index	Tier 1 or Tier 2 In Accordance with EN 50588-1		
RMU Type	SF6 Gas Insulated/Natural Gas Insulated ³		
RMU Transformer Protection Unit	MV Vacuum Circuit Breaker Unit		
RMU Cable Incoming / Outgoing Unit	Direct Cable Unit or Cable Load Break Switch Unit		
Auxiliary Transformer	Dry Type Transformer, 5 kVA, Single-phase, Ii0/50kVA, Three-phase, Dyn11 (Optional)		
Output Voltage of Auxiliary Transformer	400/230/220/210V		
Protection			
Transformer Detection & Protection	Oil Level, Oil Temperature, Oil Pressure and Buchholz		
Protection Degree of MV & LV Room	IP 54		
Internal Arcing Fault of STS	Standard IAC A 20 kA 1s/ IAC A 25 kA 1s (Optional)		
MV Arc Releasing	MV Upward Arc Releasing for Higher Safety, Meets IEC 62271-202 IAC-A		
LV Arc Releasing	Meets IEC 61641 up to Class C arcing protection on LV side		
MV Relay Protection	DVC/CVC Standard 50/51, 50N/51N DVC High Standard 50/51, 50N/51N, 87, 50BF, 51G, Inrush Blocking, Watchdog, 49T (External trip), FR (Optional) CVC High Standard 50/51, 50N/51N, 49, 86, 27, 59, 79, 74, 59N, 50BF, Inrush Blocking, Watchdog, 49T(External Trip), FR (Optional)		
LV Overvoltage Protection	Type I+II		
Anti-corrosion Protection	C5-M		
Feature			
2 kVA UPS	Optional ⁴		
MV Surge Arrester for Transformer	Optional ⁴		
IMD License	Optional ⁴		
General			
Dimensions (W x H x D)	6,058 x 2,896 x 2,438 mm (20' HC ISO Container)		
Weight	< 28 t	< 23 t	< 17 t
Operating Temperature Range	-25°C ~ 60°C ⁵		
Relative Humidity	0% ~ 95% (Non-condensing)		
Max. Operating Altitude	1,000 m ⁶		
MV-LV AC Connections	Prewired and Pretested, No Internal Cabling Onsite		
LV & MV Room Cooling	Smart Cooling without Air-across for Higher Availability		
Communication	Modbus TCP, Preconfigured with SmartACU		
Standards Compliance			
IEC 62271-202, EN 50708-1, IEC 60076, IEC 62271-200, IEC 61439-1			

DCBOX-9/5-H0

DC LV Panel



Electrical	
Max. Input Voltage	1,500 V
Nominal Input Voltage	1,200 V
Max. Branch Current for Battery Rack Side	321 A
Max. Branch Current for PCS Side	193 A
Number of DC Circuit Breaker	14
Max. Input Number of Battery Rack	9
Max. Input Number of PCS	5
Max. Convergence Capacity	5 x 193 A
Protection	
DC Overcurrent Protection	Yes
Environment	
Operating Temperature Range	-30°C ~ 60°C
Relative Humidity	0 ~ 100% (Non-condensing)
Max. Operating Altitude	4,000 m
General	
Cable Entries	Top in for PCS & Bottom in for Battery Rack
Dimensions (W x H x D)	2,040 x 1,415 x 975 mm
Weight (Without Smart PCS)	≤ 750 kg
DC Connector / AC Connector	OT Terminal
Protection Degree	IP55
Installation Options	Grounding

1 -The DCBOX can work with the LUNA2000-200KTL series models.

► DTS-200K-D0

Distribution Transformer



Technical Specifications

Electrical	
AC Power	210 kVA@ 400 Vac / 4 kVA@ 110 Vac
Rated Input Voltage	800 Vac
Max. Input Current at Nominal Voltage	151.6 A
Rated Output Voltage	400V (3P) /110V (1P)
Rated Frequency	50 / 60 Hz
Transformer Type	Dry Type
Transformer Cooling Type	AF
Transformer Vectoring Group	Dyn11yn11
Transformer Tappings	± 2 x 2.5%
Transformer Winding	Al
Transformer Insulation Class	H
Transformer Impedance (at 145°C)	4% (±10%) @50Hz / 4.8% (±10%) @60Hz
Transformer No-load Loss	≤ 500 W (+15%)
Transformer Load Loss	≤ 3,044 W (+15%)
Cablings	
Number of outputs	Five MCCBs, each connected to two outputs
Cabling mode	Routed in and out from the bottom
Protection	
Protection Degree	IP 55
LV SPD	Type II
Transformer Protection	Transformer Temperature Protection
Environment	
Operating Temperature Range	- 30°C ~ 55°C
Relative Humidity	0% ~ 95% (Non-condensing)
Max. Operating Altitude	4,000 m
General	
Dimensions (W x H x D)	900 x 2,100 x 1,200 mm
Weight	< 1.3 t
Communication Mode	Dry Contacts
Cooling Type	Smart Cooling without Air-across for Higher Availability
Standards Compliance	
IEC 60076, IEC 61439	

Success Cases



2.5 MW PV + 2MWh BESS

Light up villages by the Amazon

COD: 2022.11
Location: Peru

Success Cases



400 MW PV + 1.3 GWh BESS

World's Largest 100% PV + ESS Microgrid Project

COD: 2023.10
Location: Saudi Arabia



8MWh BESS

Poderosa Mining Microgrid

COD: 2023.10
Location: Peru




8MW PV+4MWh BESS

Mabende Mine Microgrid Phase I

COD: 2024.11
Location: Congo - Kinshasa

Success Cases

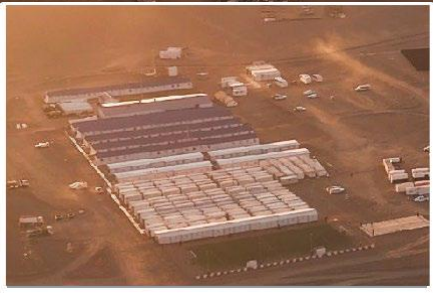

6MW PV+12MWh BESS

High-altitude (4000m) off-grid PV&BESS project in Latin America

COD: 2025.Q1
Locaton: Argentina

Success Cases



35MW PV+24MWh BESS

REA EEP02 University Campus Microgrid

COD: 2024.12
Location: Nigeria



36.5MW PV+90MWh BESS

Mongolia's first mine microgrid project

COD: 2025Q2
Location : Mongolia



2MW PV+4MWh BESS

KibaliGold Mine Microgrid Project

COD: 2025.Q1
Location: Congo-
Kinshasa