



FusionSolar® Residential & Commercial Smart PV Solution

SOLAR.HUAWEI.COM



About Huawei

Huawei is a leading global provider of information and communications technology (ICT) infrastructure and smart devices. With integrated solutions across four key domains – telecom networks, IT, smart devices, and cloud services – we are committed to bringing digital to every person, home and organization for a fully connected, intelligent world. Huawei's end-to-end portfolio of products, solutions and services are both competitive and secure. Through open collaboration with ecosystem partners, we create lasting value for our customers, working to empower people, enrich home life, and inspire innovation in organizations of all shapes and sizes. At Huawei, innovation focuses on customer needs. We invest heavily in basic research, concentrating on technological breakthroughs that drive the world forward.



Employees

194,000+



R&D Personnel

96,000+



Countries

170+



Interbrand's Top 100
Best Global Brands

74



Fortune Global 500

61



Research institutes
/labs/centers

14



No.1


In global shipment 2015-2019



118GW+

Accumulated global shipment at the end of 2019

Residential PV Solution

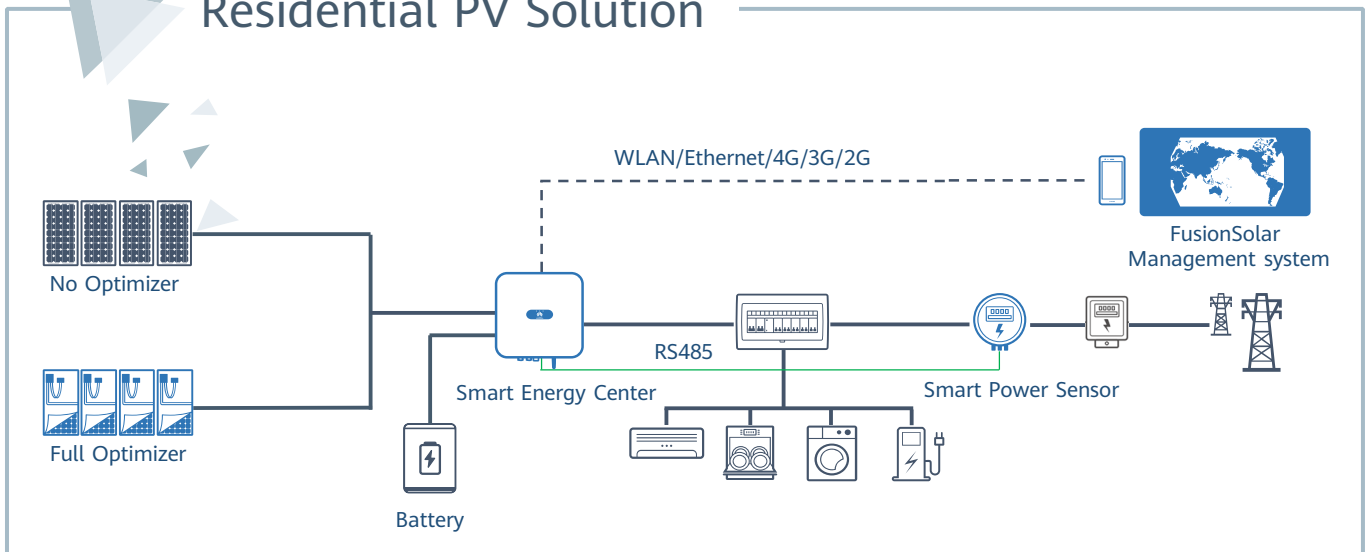

Active Safety

AI Powered Active Arcing Protection

Pinpoint Arc Fault Positioning

Higher Yields

Up to 30% More Energy by Optimizers

2x POWER Battery Ready with More Energy

Better Experience

One-Fits-All Optimizer, Easier Business

Module Auto-Mapping within 5 sec





Active Safety

AI Powered
Active Arcing Protection





Higher Yields

Up to 30% More
Energy with Optimizer



2x POWER Battery Ready

5KW AC Output plus
5KW Battery Charge

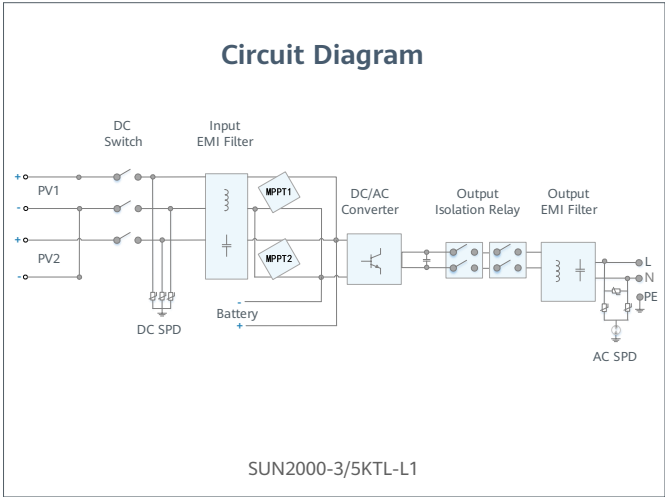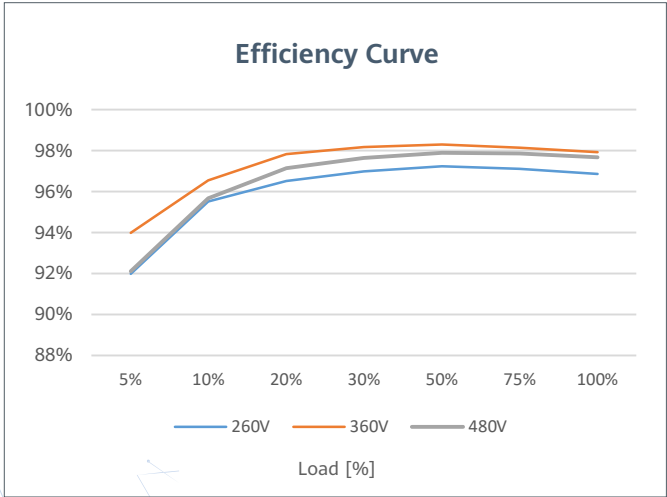

SUN2000-3/5KTL-L1

Technical Specification

Technical Specification	SUN2000 -3KTL-L1	SUN2000 -5KTL-L1
Efficiency		
Max. efficiency	98.3 %	98.4 %
European weighted efficiency	97.3 %	97.8 %
Input (PV)		
Recommended max. PV power ²	4,500 Wp	7,500 Wp
Max. input voltage	600 V ³	
Start-up voltage	100 V	
MPPT operating voltage range	90 V – 560 V ³	
Rated input voltage	360 V	
Max. input current per MPPT	12.5 A	
Max. short-circuit current	18 A	
Number of MPP trackers	2	
Max. number of inputs	2	
Input (DC Battery)		
Compatible Battery	LG Chem RESU 7H_R / 10H_R	
Operating voltage range	350 ~ 450 Vdc	
Max operating current	10 A @7H_R / 15 A @10H_R	
Max charge power	3,500 W @7H_R / 5,000 W @10H_R	
Max discharge Power @7H_R	3,300 W	3,500 W
Max discharge Power @10H_R	3,300 W	5,000 W
HUAWEI Smart ESS Battery 5kWh – 30kWh ¹		
Compatible Battery	HUAWEI Smart ESS Battery 5kWh – 30kWh ¹	
Operating voltage range	350 ~ 560 Vdc	
Max operating current	15 A	
Max charge Power	5,000 W ⁴	
Max discharge Power	3,300 W	5,000 W
Output		
Grid connection	Single phase	
Rated output power	3,000 W	5,000 W ⁵
Max. apparent power	3,300 VA	5,500 VA ⁷
Rated output voltage	220 Vac / 230 Vac / 240 Vac	
Rated AC grid frequency	50 Hz / 60 Hz	
Max. output current	15 A	25 A ⁸
Adjustable power factor	0.8 leading ... 0.8 lagging	
Max. total harmonic distortion	≤ 3 %	
Backup power output	Yes (via Backup Box-B0 ¹)	
Protection & Feature		
Anti-Islanding protection	Yes	
DC reverse polarity protection	Yes	
Insulation monitoring	Yes	
DC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11	
AC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11	
Residual current monitoring	Yes	
AC overcurrent protection	Yes	
AC short-circuit protection	Yes	
AC overvoltage protection	Yes	
Over-heat protection	Yes	
Arc fault protection	Yes	
Battery reverse charging from grid	Yes	
General Data		
Operating temperature range	-25 ~ +60 °C (Derating above 45°C @ Rated output power)	
Relative operating humidity	0 %RH ~ 100 %RH	
Operating altitude	0 ~ 4,000 m (Derating above 2,000 m)	
Cooling	Natural convection	
Display	LED indicators; integrated WLAN + FusionSolar APP	
Communication	RS485, WLAN via inverter built-in WLAN module Ethernet via Smart Dongle-WLAN-FE (Optional); 4G / 3G / 2G via Smart Dongle-4G (Optional)	
Weight (incl. mounting bracket)	12.0 kg (26.5 lb)	
Dimension (incl. mounting bracket)	365mm * 365mm * 156 mm (14.4 x 14.4 x 6.1 inch)	
Degree of protection	IP65	
Optimizer Compatibility		
DC MBUS compatible optimizer	SUN2000-450W-P	
Standard Compliance (more available upon request)		
Safety	EN/IEC 62109-1, EN/IEC 62109-2	
Grid connection standards	G98, G99, EN 50549-1, CEI 0-21, VDE-AR-N-4105, AS 4777, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, IEC61727, IEC62116	

*1 Available in 2020 Q3.

*2 Inverter max input PV power is 10,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

*3 The maximum input voltage and operating voltage upper limit will be reduced to 495 V when inverter connects and works with LG battery.

*4 2,500 W @ 5kWh HUAWEI ESS battery

*5 AS4777.2: 4,991W. *6 VDE-AR-N 4105: 4,600VA / AS4777.2: 4,999VA. *7. AS4777.2: 4,999VA / C10/11: 5,000VA *8. AS4777.2: 21.7A.

Version No.:01-(20190716)

SOLAR.HUAWEI.COM

SUN2000-5/10KTL-M0 Smart Energy Center



Higher Revenue

Max. efficiency 98.6%





Simple & Easy

17 kg



Safe & Reliable

Arc fault protection

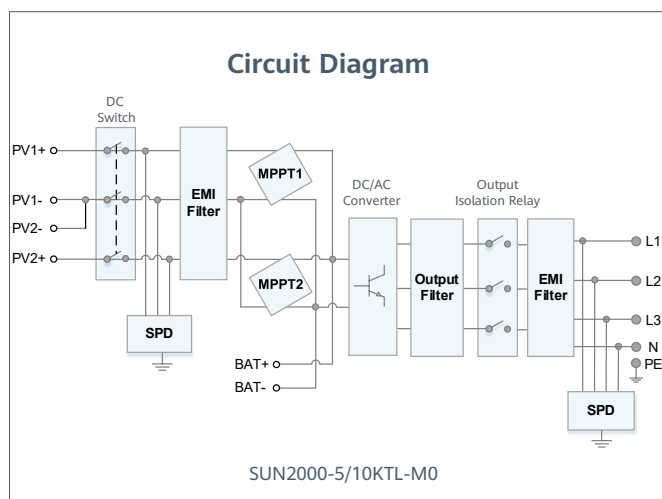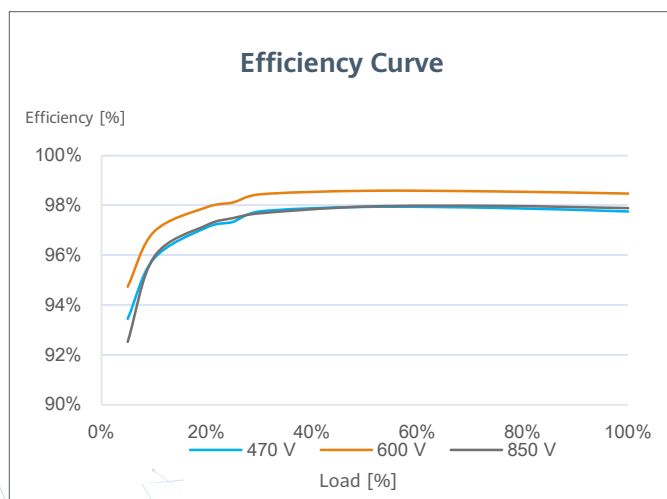

SUN2000-5/10KTL-M0

Technical Specification

Technical Specification	SUN2000-5KTL-M0	SUN2000-10KTL-M0
-------------------------	-----------------	------------------

Efficiency		
Max. efficiency	98.4%	98.6%
European weighted efficiency	97.5%	98.1%

Input		
Max. input voltage ¹	1,100 V	
Operating voltage range ²	140 V ~ 980 V	
Start-up voltage	200 V	
Full power MPPT voltage range	240 V ~ 850 V	470 V ~ 850 V
Rated input voltage	600 V	
Max. input current per MPPT	11 A	
Max. short-circuit current	15 A	
Number of MPP trackers	2	
Max. number of inputs	2	

Output		
Grid connection	Three-phase	
Rated output power	5,000 W	10,000 W
Max. apparent power	5,500 VA	11,000 VA
Rated output voltage	220 Vac / 380 Vac, 230 Vac / 400 Vac , default 3W / N+PE ; 3W+PE	
Rated AC grid frequency	50 Hz / 60 Hz	
Max. output current	8.5 A	16.9 A
Adjustable power factor	0.8 leading ... 0.8 lagging	
Max. total harmonic distortion	≤ 3 %	

Features & Protections		
Input-side disconnection device	Yes	
Anti-Islanding protection	Yes	
DC reverse polarity protection	Yes	
Insulation monitoring	Yes	
DC surge protection	Yes, compatible TYPE II protection class according to EN/IEC 61643-11	
AC surge protection	Yes, compatible TYPE II protection class according to EN/IEC 61643-11	
Residual current monitoring	Yes	
AC overcurrent protection	Yes	
AC short-circuit protection	Yes	
AC overvoltage protection	Yes	
Ripple receiver control	Yes	
Arc fault protection (AFCI)	Yes	

General Data		
Operating temperature range	-25 ~ + 60 °C (-13 °F ~ 140 °F)	
Relative operating humidity	0 %RH ~ 100 %RH	
Operating altitude	0 - 4,000 m (13,123 ft.)	
Cooling	Natural convection	
Display	LED Indicators; Integrated WLAN + FusionSolar App	
Communication	RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE; 4G / 3G / 2G via Smart Dongle-4G (Optional)	
Weight (incl. mounting bracket)	17 kg (37.5 lb)	
Dimension (incl. mounting bracket)	525 * 470 * 166 mm (20.7 * 18.5 * 6.5 inch)	
Degree of protection	IP65	
Night Time Power Consumption	< 5.5 W	


Standard Compliance (more available upon request)		
Safety	EN/IEC 62109-1, EN/IEC 62109-2, IEC62116	
Grid connection standards	G98, G99, EN 50438, EN 50549-1, CEI 0-21, VDE-AR-N-4105, AS 4777, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, IEC61727, DEWA, MEA(5,10KTL-M0), PEA(5,10KTL-M0)	

^{*1} The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
^{*2} Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

Smart PV Optimizer



One-Fits-All Optimizer
Easier Business



<1.5 min Pairing with Inverter



<5s Module Auto-Mapping



Arc Fault Pinpoint
Positioning

Technical Specification	SUN2000-450W-P
-------------------------	----------------

Input	
Rated Input DC Power ¹	450 W
Absolute maximum input voltage	80 V
MPPT operating voltage range	8 - 80 V
Maximum Short Circuit Current (Isc)	13 A
Max. efficiency	99.5 %
Weighted efficiency	99.0 %
Overvoltage category	II

Output	
Max. output voltage	80 V
Max. output current	15 A
Output bypass ²	Yes
Shutdown output voltage per optimizer ³	0 V
Shutdown output impedance per optimizer	1k ohm $\pm$ 10 %

Standard Compliance	
Safety	IEC62109-1 (class II safety)
RoHS	Yes

General Data	
Dimension (W x H x D)	71 x 138 x 25 mm (2.8 x 5.4 x 1.0 inch)
Weight (including cables)	0.55 kg (1.2 lb.)
Installation part (optional)	Grounding Plate, Grounding Lug, PV Module Frame Plate
Input connector	MC4
Output connector	MC4
Output wire length	1.2 m (3.9 ft.) ⁴
Operating temperature / humidity range	-40 °C ~ 85 °C ⁵ / 0 %RH ~ 100 %RH
Degree of protection	IP68
Compatible product	SUN2000-3/5KTL-L1, SUN2000-5/10KTL-M1, SUN2000-12/20KTL-M2

Long String Design (Full Optimizer)	SUN2000-3/5KTL-L1	SUN2000-5/10KTL-M1	SUN2000-12/20KTL-M2
Minimum optimizer number per string	4	6	6
Maximum optimizer number per string	25	50	50
Maximum DC power per string	5,000 W	10,000 W	10,000 W

¹ Rated power of the module at STC shall not exceed "Rated Input DC Power" of power optimizer. Modules with power up to +5% power tolerance are acceptable.

² Power optimizer is bypassed in the string connected to an operating inverter when it fails to work.

³ Power optimizer output 0Vdc when disconnecting to the inverter or inverter is shutdown.

⁴ Fits PV module in landscape and portrait installation.

⁵ Full power capability refers to online smart design tool.

Smart Power Sensor



Accurate

Class 1 measurement accuracy



Simple & Easy

LCD display, easy to set and check




Energy Efficient

Overall power consumption ≤ 1 W

Technical Specification	DDSU666-H	DTSU666-H 250A/50mA
General Data		
Dimension (H x W x D)	100 x 36 x 65.5 mm (3.9 x 1.4 x 2.6 inch)	100 x 72 x 65.5 mm (3.9 x 2.8 x 2.6 inch)
Mounting type	DIN35 Rail	
Weight (including cables)	1.2 kg (2.6 lb)	1.5 kg (3.3 lb)
Power Supply		
Power grid type	1P2W	3P4W
Input voltage (phase voltage)	176 Vac ~ 288 Vac	
Power consumption	≤ 0.8 W	≤ 1 W
Measurement Range		
Line voltage	/	304 Vac ~ 499 Vac
Phase voltage	176 Vac ~ 288 Vac	
Current	0 ~ 100 A	0 ~ 250 A
Measurement Accuracy		
Voltage	±0.5 %	
Current / Power / Energy	±1 %	
Frequency	±0.01 Hz	
Communication		
Interface	RS485	
Baud rate	9,600 bps	
Communication protocol	Modbus-RTU	
Environment		
Operating temperature range	-25 °C ~ 60 °C	
Storage temperature range	-40 °C ~ 70 °C	
Operating humidity	5 %RH ~ 95 %RH (non-condensing)	
Others		
Accessories	RS485 Cable (10 m / 33 ft.)	
	1 CT 100A / 40mA (5 m / 16.4 ft.) 	3 CT 250A / 50mA (5m / 16.4 ft.) 

Small-scale Commercial PV Solution

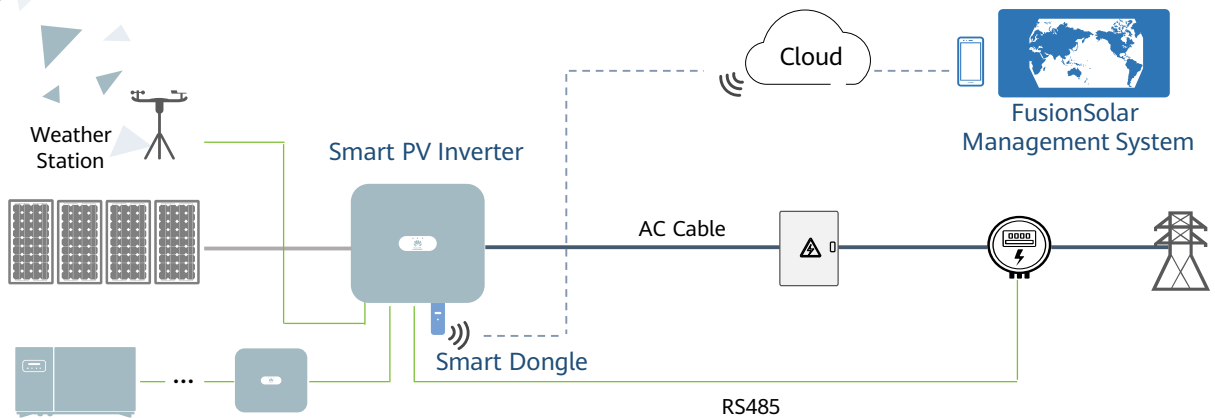

Smart Dongle supports Max. 10 devices¹

¹: Devices refer to: Inverter, meter, weather station devices and so on.

Ultimate Safety

AI Powered AFCI to mitigate fire risk

Fuse-free design for superior safety

Higher Yields

Multi-MPPT to reduce string mismatch

Max. Efficiency 98.65% for higher yields

Better Experience

WLAN/Ethernet/4G, flexible comm. options

One click I-V curve diagnosis making unhealthy modules visible



SUN2000-12/20KTL-M0 Smart String Inverter



Higher Revenue

Max. efficiency 98.65%





Simple & Easy

25 kg



Safe & Reliable

Arc fault protection

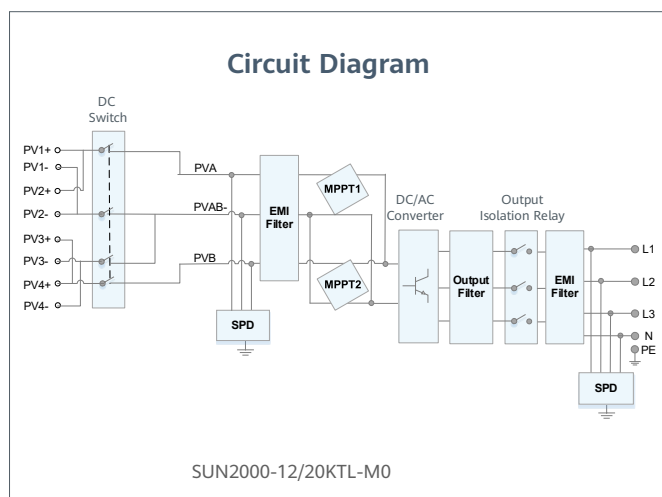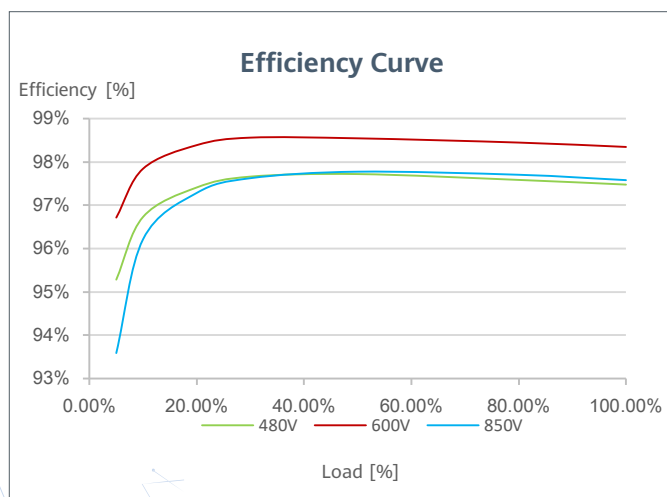

SUN2000-12/20KTL-M0
Technical Specification

Technical Specification	SUN2000 -12KTL-M0	SUN2000 -20KTL-M0
-------------------------	----------------------	----------------------

Efficiency		
Max. efficiency	98.50%	98.65%
European weighted efficiency	98.00%	98.30%

Input		
Max. input voltage ¹	1,080 V	
Operating voltage range ²	160 V ~ 950 V	
Start voltage	200 V	
Rated input voltage	600 V	
Max. input current per MPPT	22 A	
Max. short-circuit current	30 A	
Number of MPP trackers	2	
Max. number of inputs	4	

Output		
Grid connection	Three phase	
Rated output power	12,000 W	20,000 W
Max. apparent power	13,200 VA	22,000 VA
Rated output voltage	220 Vac / 380 Vac, 230 Vac / 400 Vac , default 3W / N+PE ; 3W+PE	
Rated AC grid frequency	50 Hz / 60 Hz	
Max. output current	20 A	33.5 A
Adjustable power factor	0.8 leading ... 0.8 lagging	
Max. total harmonic distortion	≤ 3 %	

Features & Protections		
Input-side disconnection device	Yes	
Anti-islanding protection	Yes	
AC over-current protection	Yes	
AC short-circuit protection	Yes	
AC over-voltage protection	Yes	
DC reverse-polarity protection	Yes	
DC surge protection	Type II	
AC surge protection ³	Yes	
Residual current monitoring unit	Yes	
Arc fault protection	Yes	
Ripple receiver control	Yes	

General Data		
Operation temperature range	-25 ~ + 60 °C (-13 °F ~ 140 °F) (Derating above 45 °C @ Rated output power)	
Relative humidity	0 % RH ~ 100% RH	
Max. operating altitude	0 - 4,000 m (13,123 ft.) (Derating above 2000 m)	
Cooling	Natural Convection	
Display	LED Indicators	
Communication	RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE (optional); 4G / 3G / 2G via Smart Dongle-4G (optional)	
Weight (with mounting plate)	25 kg	
Dimensions (W x H x D) (incl. mounting plate)	525 x 470 x 262 mm (20.7 x 18.5 x 10.3 inch)	
Degree of protection	IP65	
Night Time Power Consumption	< 5.5 W	

Standard Compliance (more available upon request)		
Safety	EN/IEC 62109-1, EN/IEC 62109-2, IEC62116	
Grid connection standards	G98, G99, EN 50438, EN50549, CEI 0-21, VDE-AR-N-4105, VDE-AR-N-4110, AS 4777, C10/11, ABNT, UTE C15-712, RD 1699, TOR D4, IEC61727, DEWA, MEA(12,20KTL-M0), PEA(12,20KTL-M0)	

^{*1} The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

^{*2} Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

^{*3} Compatible TYPE II protection class according to EN/IEC 61643-11

SUN2000-12/20KTL-M2 Smart String Inverter



Active Safety

AI Powered Arcing Protection





Higher Yields

Up to 30% More Energy with Optimizer



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

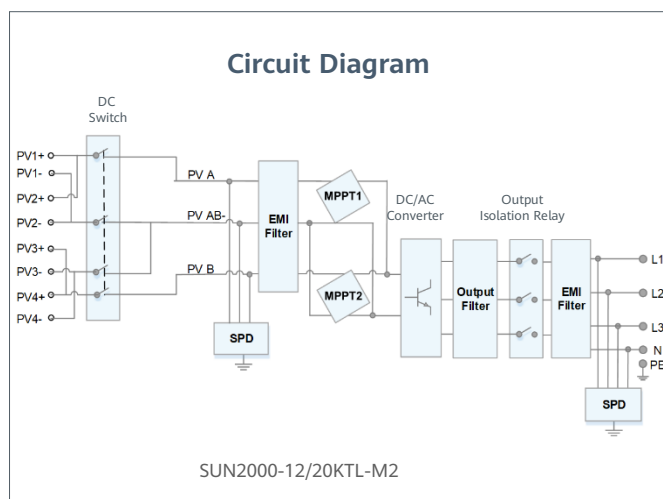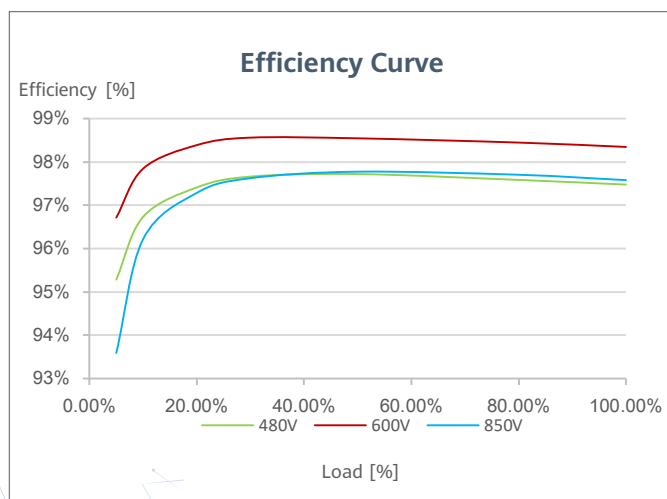

SUN2000-12/20KTL-M2

Technical Specification

Technical Specification	SUN2000 -12KTL-M2	SUN2000 -20KTL-M2
Efficiency		
Max. efficiency	98.50%	98.65%
European weighted efficiency	98.00%	98.30%
Input		
Recommended max. PV power ¹	18,000 Wp	30,000 Wp
Max. input voltage ²	1,080 V	
Operating voltage range ³	160 V ~ 950 V	
Start-up voltage	200 V	
Rated input voltage	600 V	
Max. input current per MPPT	22 A	
Max. short-circuit current	30 A	
Number of MPP trackers	2	
Max. number of inputs	4	
Output		
Grid connection	Three phase	
Rated output power	12,000 W	20,000 W
Max. apparent power	13,200 VA	22,000 VA
Rated output voltage	220 Vac / 380 Vac, 230 Vac / 400 Vac, 3W + N + PE	
Rated AC grid frequency	50 Hz / 60 Hz	
Max. output current	20 A	33.5 A
Adjustable power factor	0.8 leading ... 0.8 lagging	
Max. total harmonic distortion	≤ 3 %	
Features & Protections		
Input-side disconnection device	Yes	
Anti-islanding protection	Yes	
AC over-current protection	Yes	
AC short-circuit protection	Yes	
AC over-voltage protection	Yes	
DC reverse-polarity protection	Yes	
DC surge protection	TYPE II	
AC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11	
Residual current monitoring unit	Yes	
Arc fault protection	Yes	
Ripple receiver control	Yes	
Integrated PID recovery ⁴	Yes	
General Data		
Operation temperature range	-25 ~ + 60 °C (-13 °F ~ 140 °F)	
Relative humidity	0 % RH ~ 100% RH	
Max. operating altitude	0 ~ 4,000 m (13,123 ft.) (Derating above 2000 m)	
Cooling	Natural Convection	
Display	LED Indicators; Integrated WLAN + FusionSolar App	
Communication	RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional)	
Weight (with mounting plate)	25 kg	
Dimensions (W x H x D) (incl. mounting plate)	525 x 470 x 262 mm (20.7 x 18.5 x 10.3 inch)	
Degree of protection	IP65	
Optimizer Compatibility		
DC MBUS compatible optimizer	SUN2000-450W-P	
Standard Compliance (more available upon request)		
Safety	EN/IEC 62109-1, EN/IEC 62109-2	
Grid connection standards	G98, G99, EN 50549, CEI 0-21, CEI 0-16, VDE-AR-N-4105, VDE-AR-N-4110, AS 4777.2, C10/11, ABNT, VFR 2019, RD 1699, RD 661, PO 12.3, TOR D4, IEC61727, IEC62116, DEWA, MEA, PEA	

*1 Inverter max input PV power is 40,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

*2 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

*3 Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

*4 SUN2000-12~20KTL-M2 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly)

SUN2000-36KTL Smart String Inverter



Smart

8 strings intelligent monitoring



Efficient

Max. efficiency 98.6%



Safe


Fuse free design




Reliable

Type II surge arresters for DC & AC

Efficiency Curve

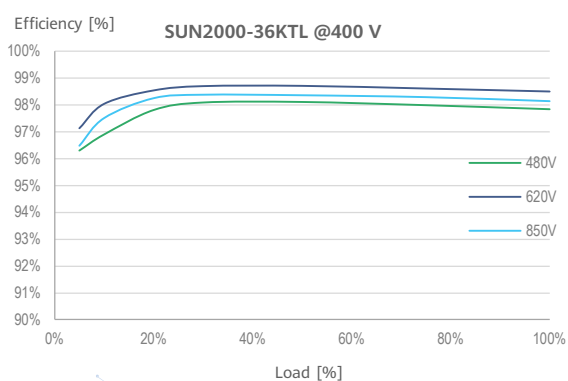


Circuit Diagram

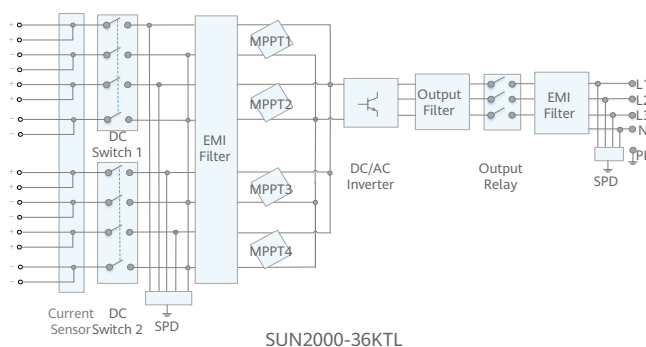

SUN2000-36KTL
Technical Specification

Technical Specification	SUN2000-36KTL
Efficiency	
Max. Efficiency	98.8% @480 V, 98.6% @380 V / 400 V
European Efficiency	98.6% @480 V, 98.4% @380 V / 400 V
Input	
Max. Input Voltage	1,100 V
Max. Current per MPPT	22 A
Max. Short Circuit Current per MPPT	30 A
Start Voltage	250 V
MPPT Operating Voltage Range	200 V ~ 1,000 V
Rated Input Voltage	620 V @380 V / 400 V, 720 V @480 V
Number of Inputs	8
Number of MPP Trackers	4
Output	
Rated AC Active Power	36,000 W
Max. AC Apparent Power	40,000 VA
Max. AC Active Power (cosφ=1)	40,000 W
Rated Output Voltage	220 V / 380 V, 230 V / 400 V, default 3W + N + PE; 3W + PE optional in settings
Rated AC Grid Frequency	50 Hz / 60 Hz
Rated Output Current	54.6 A @380 V, 52.2 A @400 V, 43.4 A @480 V
Max. Output Current	60.8 A @380 V, 57.8 A @400 V, 48.2 A @480 V
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	<3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Arc Fault Protection	Yes (Optional)
Communication	
Display	LED Indicators, APP
RS485	Yes
USB	Yes
MBUS	Yes (isolation transformer required)
General Data	
Dimensions (W x H x D)	930 x 550 x 283 mm (36.6 x 21.7 x 11.1 inch)
Weight (with mounting plate)	62 kg (136.7 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Max. Operating Altitude	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Amphenol Helios H4
AC Connector	Cable Gland + OT Terminal
Protection Degree	IP65
Topology	Transformerless
Night Time Power Consumption	< 2.5 W
Standard Compliance (more available upon request)	
Safety	EN 62109-1/-2, IEC 62109-1/-2
Grid Connection Standards	IEC 61727, IEC 62116, EN 50530, IEC 60068, IEC 61683, AS/NZS 4777.2, G59/3, PEA, MEA, Philippine Resolution No.7, VDE 0126-1-1

Large-scale Commercial PV Solution

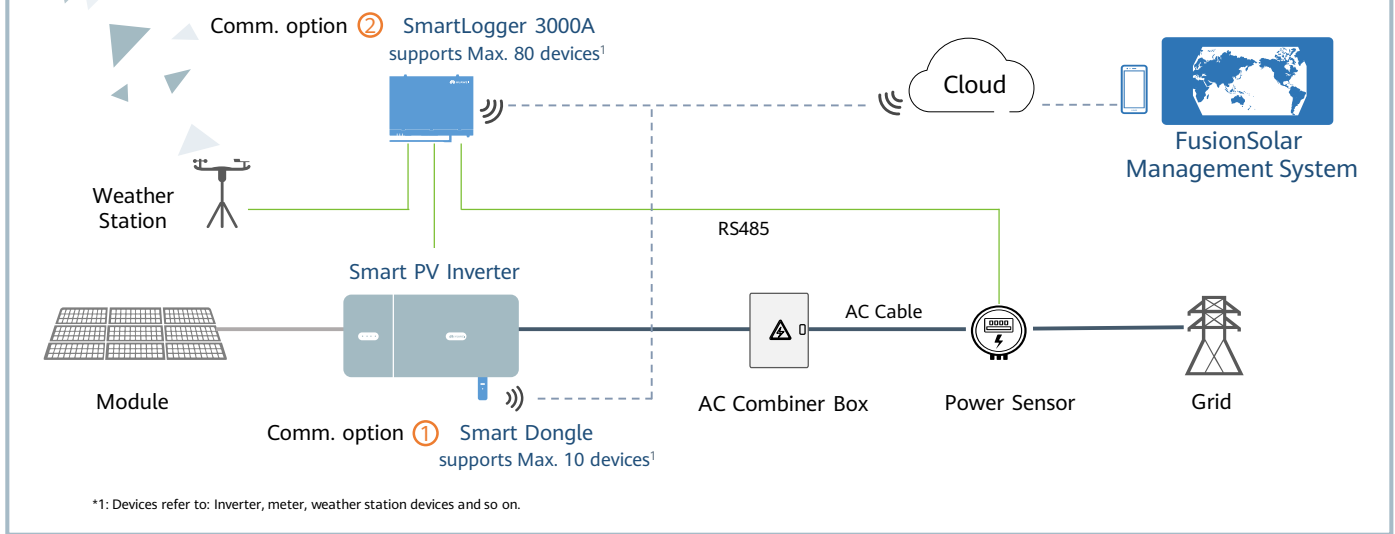

Safe & Reliable

Fuse-free design for superior safety

Natural cooling fully sealed design for better reliability

Higher Yields

Multi-MPPT to reduce string mismatch

Max. Efficiency 98.7% for higher yields

Smart O&M

String-level monitoring for fast trouble-shooting

One click I-V curve diagnosis making unhealthy modules visible



SUN2000-60KTL-M0 Smart String Inverter



Smart

Smart I-V Curve Diagnosis supported



Efficient

Max. efficiency 98.7%



Safe


Fuse free design




Reliable

Type II surge arresters for DC & AC

Efficiency Curve

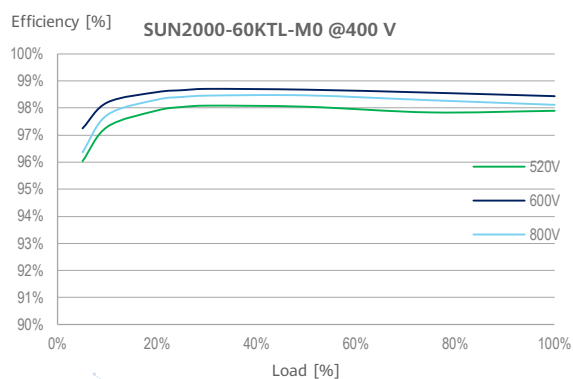

Circuit Diagram

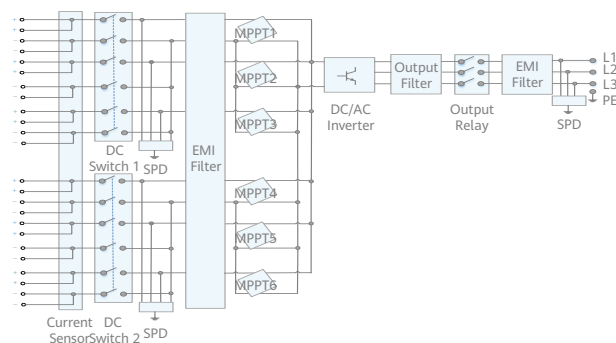

SUN2000-60KTL-M0

SUN2000-60KTL-M0

Technical Specification

Technical Specification	SUN2000-60KTL-M0
Efficiency	
Max. Efficiency	98.9% @480 V, 98.7% @380 V / 400 V
European Efficiency	98.7% @480 V, 98.5% @380 V / 400 V
Input	
Max. Input Voltage	1,100 V
Max. Current per MPPT	22 A
Max. Short Circuit Current per MPPT	30 A
Start Voltage	200 V
MPPT Operating Voltage Range	200 V ~ 1,000 V
Rated Input Voltage	600 V @380 V / 400 V, 720 V @480 V
Number of Inputs	12
Number of MPP Trackers	6
Output	
Rated AC Active Power	60,000 W
Max. AC Apparent Power	66,000 VA
Max. AC Active Power (cosφ=1)	66,000 W
Rated Output Voltage	220 V / 380 V, 230 V / 400 V, default 3W + N + PE; 3W + PE optional in settings; 277 V / 480 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Rated Output Current	91.2 A @380 V, 86.7 A @400 V, 72.2 A @480 V
Max. Output Current	100 A @380 V, 95.3 A @400 V, 79.4 A @480 V
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	<3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, APP
RS485	Yes
USB	Yes
MBUS	Yes (isolation transformer required)
General Data	
Dimensions (W x H x D)	1,075 x 555 x 300 mm (42.3 x 21.9 x 11.8 inch)
Weight (with mounting plate)	74 kg (163.1 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Max. Operating Altitude	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Amphenol Helios H4
AC Connector	Cable Gland + OT Terminal
Protection Degree	IP65
Topology	Transformerless
Night Time Power Consumption	< 2 W
Standard Compliance (more available upon request)	
Safety	EN 62109-1/-2, IEC 62109-1/-2, IEC 62116
Grid Connection Standards	IEC 61727, EN 50530, IEC 62910, IEC 60068, IEC 61683, VDE 4105/0126, UTE C 15-712-1, EN 50438, CLC/TS 50549-1, CEI 0-16/21, C10/11, RD 1699, PO 12.9, Philippine Resolution No. 07, AS/NZS 4777.2, DEWA, NRS 097-2-1, IEEE 1547, ABNT, PEA, MEA, NB/T 32004-2013

SUN2000-100KTL-M1 Smart String Inverter



Smart

Smart I-V Curve Diagnosis supported



Efficient

Max. efficiency 98.8%



Safe


Fuse free design




Reliable

Type II surge arresters for DC & AC

Efficiency Curve

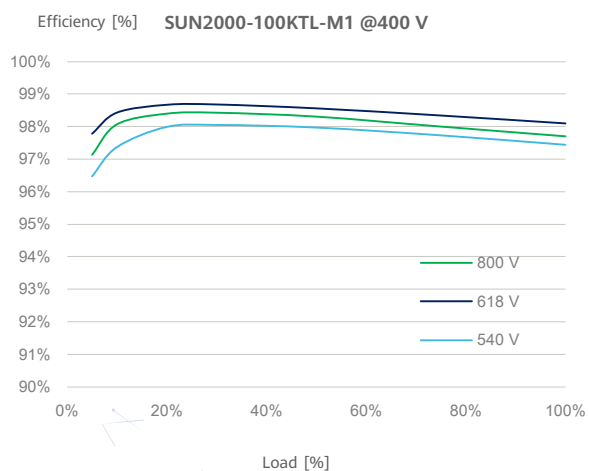

Circuit Diagram

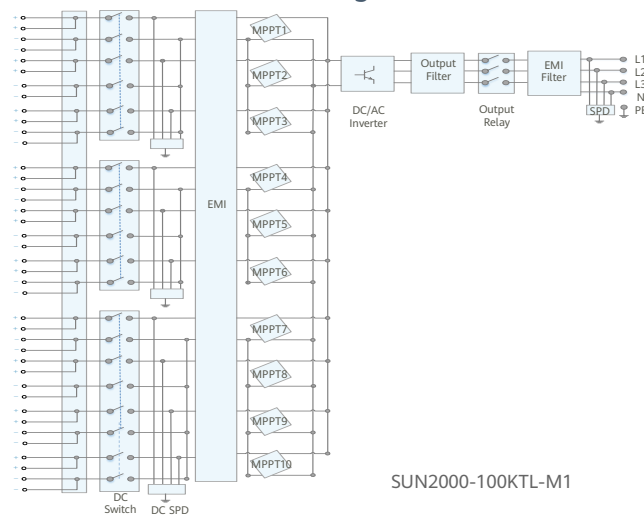

SUN2000-100KTL-M1
Technical Specification

Technical Specification	SUN2000-100KTL-M1
Efficiency	
Max. Efficiency	98.8% @480 V; 98.6% @380 V/400 V
European Efficiency	98.6% @480 V; 98.4% @380 V/400 V
Input	
Max. Input Voltage	1,100 V
Max. Current per MPPT	26 A
Max. Short Circuit Current per MPPT	40 A
Start Voltage	200 V
MPPT Operating Voltage Range	200 V ~ 1,000 V
Rated Input Voltage	570 V @380 V; 600 V @400 V; 720 V @480 V
Number of Inputs	20
Number of MPP Trackers	10
Output	
Rated AC Active Power	100,000 W (380 V / 400 V / 480 V @40°C)
Max. AC Apparent Power	110,000 VA
Max. AC Active Power (cosφ=1)	110,000 W
Rated Output Voltage	220 V / 230 V, default 3W + N + PE; 380 V / 400 V / 480 V, 3W + PE
Rated AC Grid Frequency	50 Hz / 60 Hz
Rated Output Current	152.0 A @380 V; 144.4 A @400 V; 120.3 A @480 V
Max. Output Current	168.8 A @380 V; 160.4 A @400 V; 133.7 A @480 V
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	<3%
Protection	
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
AC Overcurrent Protection	Yes
DC Reverse-polarity Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
Communication	
Display	LED Indicators, APP
RS485	Yes
USB	Yes
MBUS	Yes (isolation transformer required)
General Data	
Dimensions (W x H x D)	1,035 x 700 x 365mm (40.7 x 27.6x 14.4 inch)
Weight (with mounting plate)	90 kg (187.4 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Smart Air Cooling
Max. Operating Altitude	4,000 m (13,123 ft.)
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4
AC Connector	Waterproof Connector + OT/DT Terminal
Protection Degree	IP66
Topology	Transformerless
Night Time Power Consumption	≤ 3.5 W
Standard Compliance (more available upon request)	
Safety	EN 62109-1/-2, IEC 62109-1/-2, IEC 62116
Grid Connection Standards	EN 50530, IEC 61727, IEC 60068, IEC 61683

Smart Dongle-WLAN-FE



Smart

WLAN & Fast Ethernet (FE) communication
Support 3rd-party monitoring system ¹



Simple

Plug & Play
Support max. 10 devices²



Reliable

IP65
Support auto reconnection

Technical Specification	SDongleA-05
General Data	
Max. Devices ² Supported	10
Connection interface	USB
Ethernet Interface	10/100M Ethernet
Installation	Plug-and-play
Indicator	LED Indicator
Dimensions (W * H * D)	146 x 48 x 33 mm (5.1 x 1.9 x 1.3 inch)
Weight	90 g (0.2 lb.)
Degree of protection	IP65
Power consumption (typical)	2.5 W
Operation Mode	STA
Encryption Algorithm	Encryption Mechanism: WPA/WPA2 Encryption: TKIP/CCMP/AES
Wireless Parameter	
Supported standards & frequencies	802.11b/g/n (2.412G—2.484G)
Environment	
Operating temperature range	-30 °C to +65 °C (-22 °F to 149 °F)
Relative humidity range	5 - 95% RH
Storage temperature range	-40°C to +70°C (-40 °F to 158 °F)
Max. operating altitude	4,000 m (13,123 ft.)
Standard Compliance (more available upon request)	
Certificate	SRRC, CE, RCM
Inverter Compatibility	
Supported Master Inverter Model	SUN2000-3/5KTL-L1 SUN2000-5/10KTL-M0 SUN2000-12/20KTL-M0/M2

1: 3rd-party management system shall match the communication protocol with Huawei Smart Dongle.
2: Devices refer to: Inverter, meter, weather station devices and so on.

Smart Dongle-4G



Smart

Smart zero export control design
Support 3rd-party monitoring system¹



Simple

Plug & Play
Support max. 10 devices²



Reliable

IP65
Support auto reconnection

Technical Specification	SDongleA-03-EU
General Data	
Max. Devices ⁴ Supported	10
Connection interface	USB
Installation	Plug-and-play
Indicator	LED Indicator
Dimensions (W * H * D)	130 x 48 x 33 mm (5.1 x 1.9 x 1.3 inch)
Weight	90 g (0.2 lb.)
Degree of protection	IP65
Power consumption (typical)	3.5 W
Wireless Parameter	
Sim card type	mini-sim (15 mm*25 mm)
Supported standards & frequencies	4G: FDD-LTE / TDD-LTE 3G: WCDMA / HSDPA / HSUPA / HSPA+ 2G: GSM / GPRS / EDGE ²
Environment	
Operating temperature range	-30 °C to +65 °C (-22 °F to 149 °F)
Relative humidity range	5 - 95% RH
Storage temperature range	-40°C to +70°C (-40 °F to 158 °F)
Max. operating altitude	4,000 m (13,123 ft.)
Standard Compliance (more available upon request)	
Certificate	CE, Type Approval for Thailand, MIC
Inverter Compatibility	
Inverter model	SUN2000-3/5KTL-L1 SUN2000-5/10KTL-M0 SUN2000-12/20KTL-M0/M2 SUN2000-60KTL-M0 SUN2000-100KTL-M1

*1: 3rd-party management system shall match the communication protocol with Huawei Smart Dongle.

*2: For recommended carriers list and details on supported frequencies, please contact local distributors.

*3: To ensure stable data transmission, Huawei suggests 4G dongle to be installed in areas with stable mobile signal (2G signal ≥4 bars, 3G/4G signal ≥3 bars).

*4: Devices refer to: Inverter, meter, weather station devices and so on.



Smart

Smart zero export control design



Simple

Easy to install on site



Reliable

Safety by lightning protection module

Technical Specification	SmartLogger3000A01EU
Device Management	
Max. Number of Manageable Devices ³	80
Communication Interface	
WAN	WAN x 1, 10 / 100 / 1000 Mbps
LAN	LAN x 1, 10 / 100 / 1000 Mbps
RS485	COM x 3, 1200 / 2400 / 4800 / 9600 / 19200 / 115200 bps, 1000 m
2G / 3G / 4G ¹	LTE(FDD) : B1,B2,B3,B4,B5,B7,B8,B20 DC-HSPA+/HSPA+/HSPA/UMTS : 850/900/1900/2100 MHz GSM/GPRS/EDGE: 850/900/1800/1900 MHz ²
Digital / Analog Input / Output	DI x 4, DO x 2, AI x 4
Active DO	12V, 100mA (connection with relay, sensor)
Communication Protocol	
Ethernet	Modbus-TCP, IEC 60870-5-104
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645
Interaction	
LED	LED Indicator x 3 – RUN, ALM, 4G
WEB	Embedded Web
USB	USB 2.0 x 1
APP	FusionSolar APP Communicated by WLAN for Commissioning
Environment	
Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
Relative Humidity (Non-condensing)	5% ~ 95%
Max. Operating Altitude	4,000 m (13,123 ft.)
Electrical	
AC Power Supply	100 V ~ 240 V, 50 Hz / 60 Hz
DC Power Supply	12V / 24 V
Power Consumption	Typical 8 W, Max. 15 W
Mechanical	
Dimensions (W x H x D)	225 x 160 x 44 mm (8.9 x 6.3 x 1.7 inch, without mounting ears and antenna)
Weight	2 kg (4.4 lb.)
Protection Degree	IP20
Installation Options	Wall Mounting, DIN Rail Mounting, Tabletop Mounting

*1: When putting inside metal box, extended antenna will be needed.

*2: For recommended carriers list and details on supported frequencies, please contact local distributors.

*3: Devices refer to: Inverter, meter, weather station devices and so on.

SmartLogger3000A



Smart

Smart zero export control design



Simple

Easy to install on site



Reliable


Safety by lightning protection module

Technical Specification	SmartLogger3000A00GL
Device Management	
Max. Number of Manageable Devices ²	80
Communication Interface	
WAN	WAN x 1, 10 / 100 / 1000 Mbps
LAN	LAN x 1, 10 / 100 / 1000 Mbps
RS485	COM x 3, 1200 / 2400 / 4800 / 9600 / 19200 / 115200 bps, 1000 m
Digital / Analog Input / Output	DI x 4, DO x 2, AI x 4
Active DO	12V, 100mA (connection with relay, sensor)
Communication Protocol	
Ethernet	Modbus-TCP, IEC 60870-5-104
RS485	Modbus-RTU, IEC 60870-5-103 (standard), DL / T645
Interaction	
LED	LED Indicator x 3 – RUN, ALM, 4G ¹
WEB	Embedded Web
USB	USB 2.0 x 1
APP	FusionSolar APP Communicated by WLAN for Commissioning
Environment	
Operating Temperature Range	-40°C ~ 60°C (-40°F ~ 140°F)
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
Relative Humidity (Non-condensing)	5% ~ 95%
Max. Operating Altitude	4,000 m (13,123 ft.)
Electrical	
AC Power Supply	100 V ~ 240 V, 50 Hz / 60 Hz
DC Power Supply	12V / 24 V
Power Consumption	Typical 8 W, Max. 15 W
Mechanical	
Dimensions (W x H x D)	225 x 160 x 44 mm (8.9 x 6.3 x 1.7 inch, without mounting ears and antenna)
Weight	2 kg (4.4 lb.)
Protection Degree	IP20
Installation Options	Wall Mounting, DIN Rail Mounting, Tabletop Mounting

*1: 4G is not available in this model.

*2: Devices refer to: Inverter, meter, weather station devices and so on.

FusionSolar Smart PV Management System

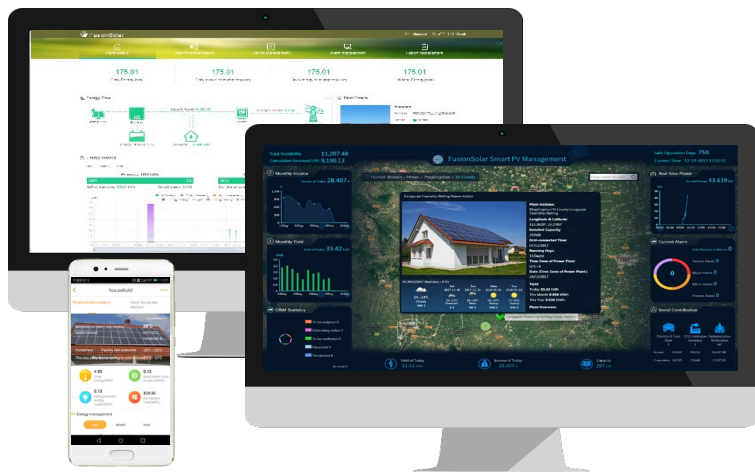

Simple & Swift

- Simple commissioning by APP
- Auto-detection of system equipment
- Registering your plant by scanning any device



Convenient & Reliable

- Energy flow illustration
- Real-time data at anytime from anywhere
- Performance data back-up



Improved O&M Experience

- Physical & logical module layout
- Module-level performance management *
- Smart I-V Diagnosis

Feature List		WEB	APP
Basic Feature	Swift Installation & Registration	●	●
	Data Collection	●	
	Dashboard	●	●
	Energy Flow	●	●
	Energy Generation & Consumption	●	●
	Device Management	●	●
	Report Management	●	●
	Alarm Management	●	●
	System Configuration	●	
Advanced Feature	Intelligent O&M	○	
	Mobile O&M	○	○
	Proactive Diagnosis	○	○
	Smart I-V Curve Diagnosis	○	○


● Basic ○ Optional

* Only for residential scenario. Optimizer with Smart PV Safety Box required.

Smart I-V Curve Diagnosis



Smart I-V Curve Diagnosis is able to carry out online I-V curve analysis on entire strings with advanced diagnosis algorithm. The scanning would help to find out and identify the strings with low performance or faults, which would help to achieve proactive maintenance, higher O&M efficiency and lower operation cost.

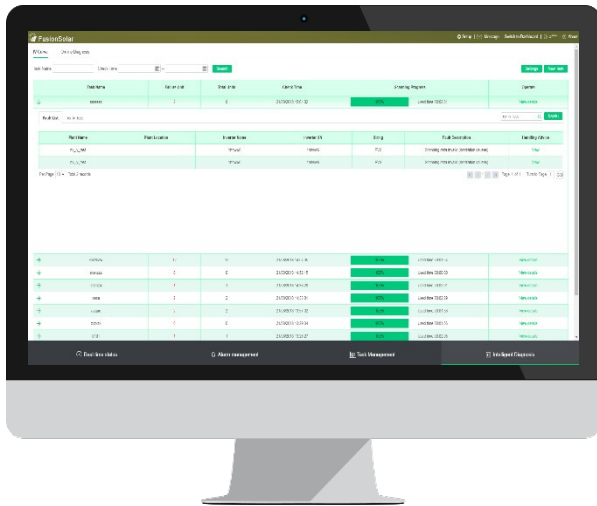

Smart


- Support plant-level, array-level and inverter-level analysis and diagnosis
- Automatically identify different failure types and provide recovery suggestion



Efficient

- One-click scanning without onsite experts or equipment
- Online I-V curve scanning on entire strings of 5 MW plant within 5min
- Automatic report generation of 5 MW plant within 15min

Network

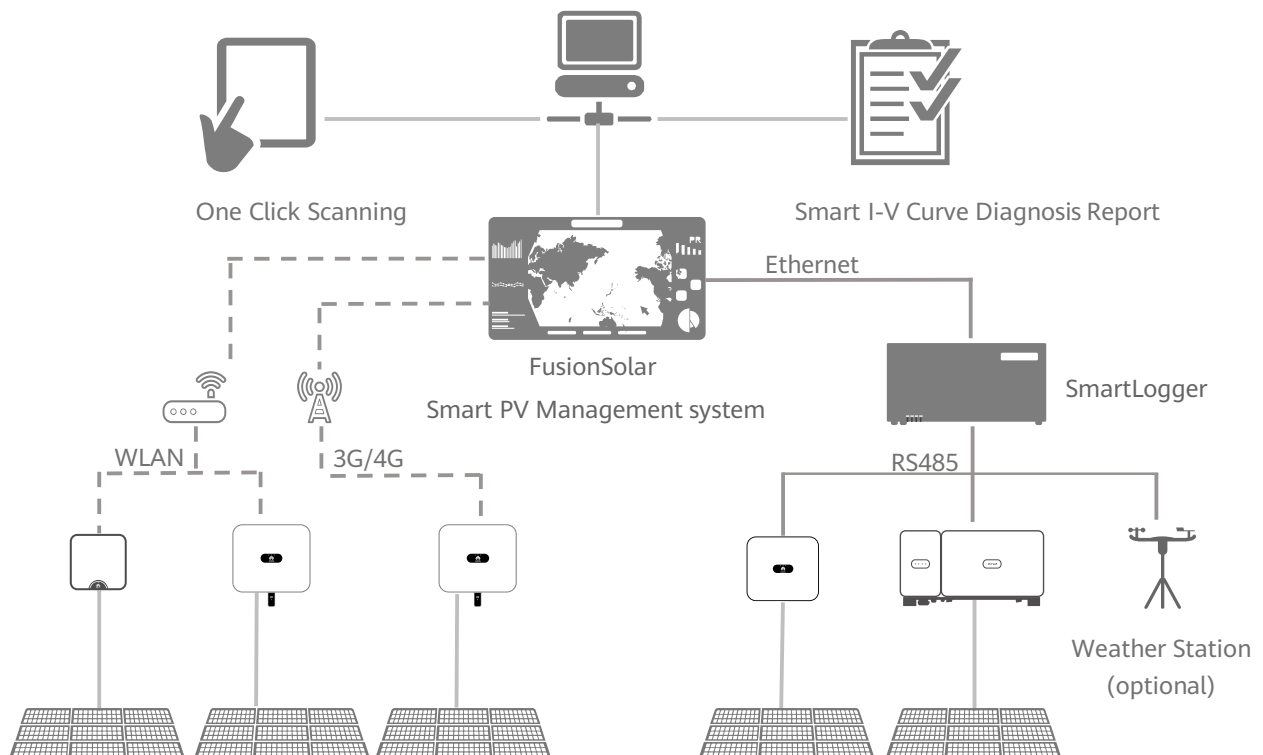


Smart I-V Curve Diagnosis

Technical Specifications	Smart I-V Curve Diagnosis	
Smart PV Inverter*	SUN2000-2/3/4/5KTL-L1, SUN2000-3-10KTL-M0, SUN2000-12-20KTL-M0/M2, SUN2000-36KTL, SUN2000-60KTL-M0, SUN2000-100KTL-M1	
Communication	SmartLogger3000A, Smart Dongle-WLAN-FE, Smart Dongle-4G	
Management System	FusionSolar Smart PV Management System	
Scanning Time	< 1s (1 string)	
Sampling Points per I-V Curve	128	
Certification	 TÜVRheinland®	TUV


* I-V curve diagnosis is not supported when inverter is connected with power optimizer.

String-level Management

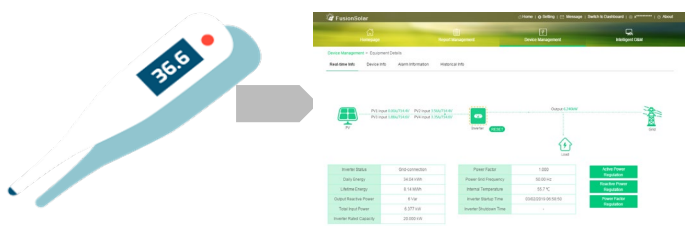


Real time monitoring

Smart I-V Curve Diagnosis

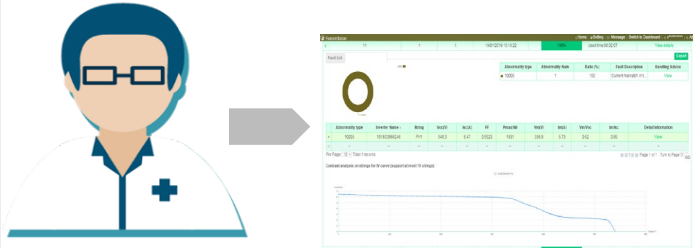

Fault Analysis

String I-V Curve Comparison

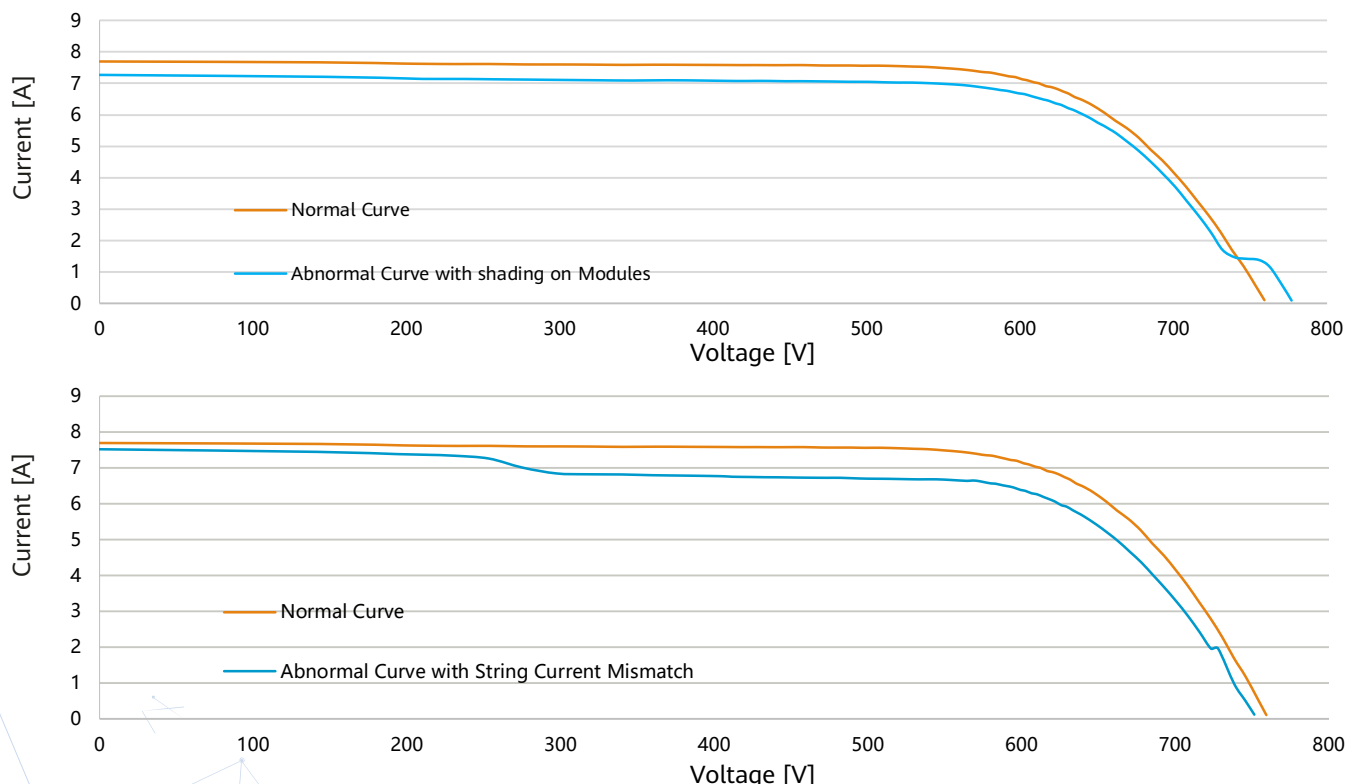



3kW

Residential PV System in Quezon City, Philippines

System Configuration

- SUN2000L-3KTL

COD

June, 2018



5kW

Residential PV System in Hong Kong, China

System Configuration

- SUN2000L-5KTL

COD

Nov, 2018




4kW

Residential PV System in Waregem, Belgium

System Configuration – Partial Optimizer

- 18 × 295Wp modules
- 6 × 375W optimizers
- SUN2000L-4KTL, WLAN
- Smart PV safety box

COD
May, 2018

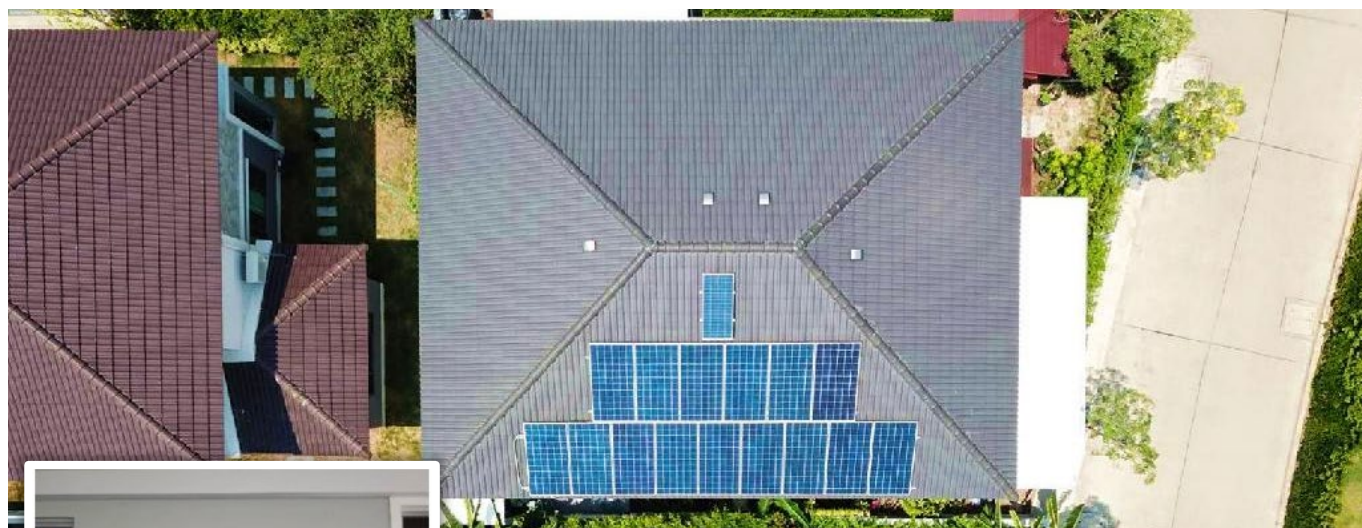

5kW

Residential Energy System in Bangkok, Thailand

System Configuration

- SUN2000L-5KTL

COD
April, 2019



15kW

Residential PV System in Philippines

System Configuration

- 80 modules
- 3 × SUN2000L-5KTL

COD
Mar, 2019



4.5MW

Distributed PV System in Taichung, Taiwan

System Configuration

- SUN2000-40KTL

COD
May, 2019



2.8MWp

Distributed PV System in Changi Airport, Singapore

System Configuration

- SUN2000-36KTL

COD

Dec, 2016



1MWp

Distributed PV System in Kuala Lumpur, Malaysia

System Configuration

- SUN2000-36KTL

COD

Mar, 2016

Case Reference



604.5 kWp

Distributed PV System in Philippines

System Configuration

- SUN2000-42KTL

COD

Jan, 2019



760kWp

Distributed PV System in Vietnam

System Configuration

- SUN2000-36KTL

COD

July, 2018

Huawei Technologies (Thailand) Co., Ltd

No.9, G Tower Grand Rama 9, Room No. GN01-04,
Rama 9 Road, 34th-39th Floor, Huaykwang Sub-district,
Huaykwang District, Bangkok Metropolis, 10310

Huawei Technologies (Cambodia) Co., Ltd.

18th, 19th Floor, Exchange Square, NO. 1A, Street 102,
Sangkat Wat Phnom, Phnom Penh

PT. Huawei Tech Investment

Gedung BRI II Lantai 22, Jalan Jend. Sudirman Kav 44 – 46,
Jakarta Pusat – DKI Jakarta.
Postcode: 10210

Huawei Technologies Lanka Company Pvt Ltd

Sri Lanka-Colombo-17th Floor, West Tower, World Trade Center,
Colombo 01, Sri Lanka

Huawei Technologies (Vietnam) Co., Ltd.

33rd Floor, Keangnam Hanoi Landmark Tower 72,
Pham Hung Road, Hanoi

Huawei Technologies (Malaysia) Sdn Bhd

Suite 32-01, Level 32, Integra Tower, The Intermark,
348 Jalan Tun Razak, 50400 Kuala Lumpur, Malaysia

Huawei Technologies Phils. Inc.

28th Floor, Twenty-Four Seven McKinley, 24 7th Ave, Taguig,
Metro Manila, Philippines

Huawei Technologies (Bangladesh) Limited

Lotus Kamal Tower TWO, 6th floor, 59&61 Gulshan South Avenue,
Gushan-1, Dhaka-1212, Bangladesh [Level-9]

Huawei International Pte. Ltd.

51 Changi Business Park Central 2 #07-08 The Signature.
Postcode: 486066



Copyright © Huawei Technologies Co., Ltd.2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means
without prior written consent of Huawei Technologies Co., Ltd.

Trademark Notice

, HUAWEI and are trademarks or registered remarks of Huawei Technologies Co., Ltd.

Other trademarks, product service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statements including, without limitation,
statements regarding the future financial and operating results, future product portfolio, new technology,
etc. There are a number of factors that could cause actual results and developments to differ materially from
those expressed or implied in the predictive statements. Therefore, such information is provided for
reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the
information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD

Huawei Industrial Base Bantian Longgang Shenzhen 518129,P.R.China

Tel.:400-822-9999 Version No:01-(20190618)

solar.huawei.com